




## JRC TECHNICAL REPORT

# Real Driving Emissions: 2018-2019 assessment of Portable Emissions Measurement Systems (PEMS) measurement uncertainty

Valverde, V., Giechaskiel, B., Carriero, M.

2020

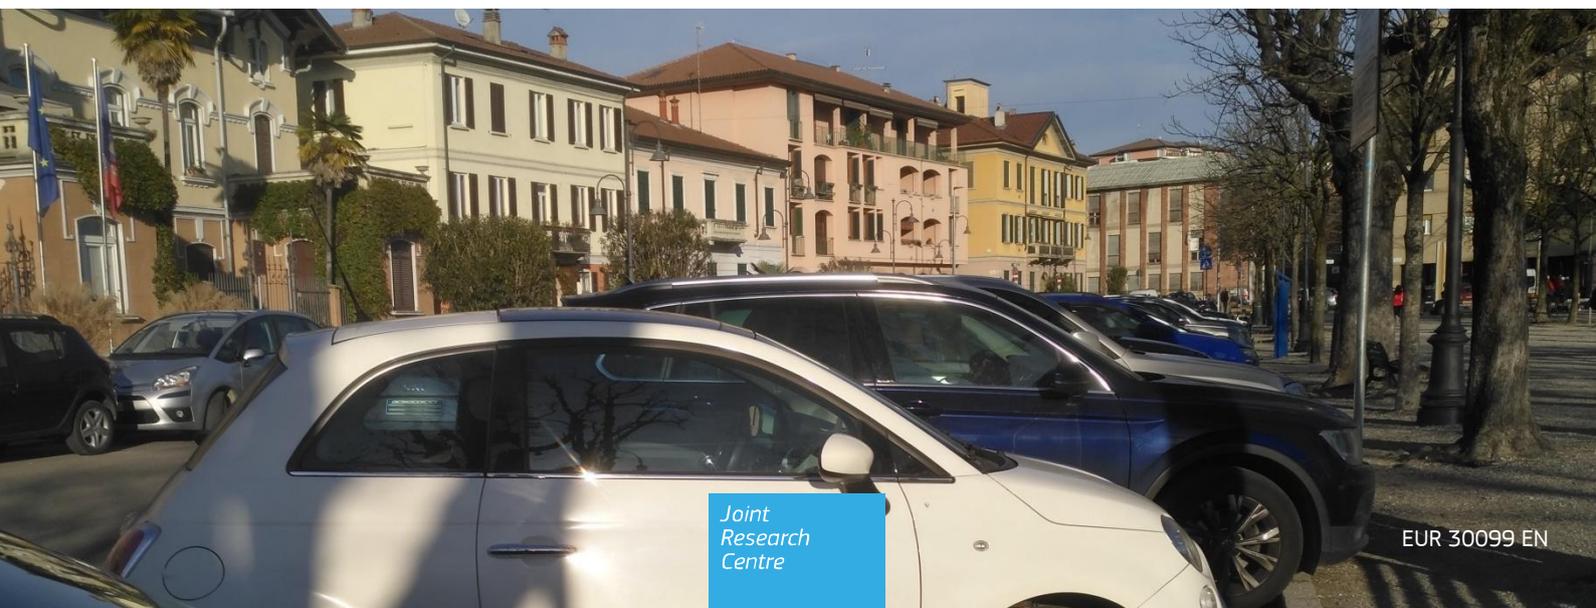

EUR 30099 EN

This publication is a Technical report by the Joint Research Centre (JRC), the European Commission's science and knowledge service. It aims to provide evidence-based scientific support to the European policymaking process. The scientific output expressed does not imply a policy position of the European Commission. Neither the European Commission nor any person acting on behalf of the Commission is responsible for the use that might be made of this publication. For information on the methodology and quality underlying the data used in this publication for which the source is neither Eurostat nor other Commission services, users should contact the referenced source. The designations employed and the presentation of material on the maps do not imply the expression of any opinion whatsoever on the part of the European Union concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontiers or boundaries.

#### Contact information

Name: Barouch Giechaskiel

Address: European Commission, Joint Research Center, Via Enrico Fermi, 2749, 21027 Ispra (VA) Italy

Email: [barouch.giechaskiel@ec.europa.eu](mailto:barouch.giechaskiel@ec.europa.eu)

Tel.: +39 033278-5312

#### EU Science Hub

<https://ec.europa.eu/jrc>

JRC114416

EUR 30099 EN

PDF	ISBN 978-92-76-16365-7	ISSN 1831-9424	doi:10.2760/06282
Print	ISBN 978-92-76-16364-0	ISSN 1018-5593	doi:10.2760/684820

Luxembourg: Publications Office of the European Union, 2020

© European Union, 2020



The reuse policy of the European Commission is implemented by the Commission Decision 2011/833/EU of 12 December 2011 on the reuse of Commission documents (OJ L 330, 14.12.2011, p. 39). Except otherwise noted, the reuse of this document is authorised under the Creative Commons Attribution 4.0 International (CC BY 4.0) licence (<https://creativecommons.org/licenses/by/4.0/>). This means that reuse is allowed provided appropriate credit is given and any changes are indicated. For any use or reproduction of photos or other material that is not owned by the EU, permission must be sought directly from the copyright holders.

All content © European Union, 2020

How to cite this report: Valverde, V. et al., *Real Driving Emissions: 2018-2019 assessment of Portable Emissions Measurement Systems (PEMS) measurement uncertainty*, EUR 30099 EN, Publications Office of the European Union, Luxembourg, 2020, ISBN 978-92-76-16365-7, doi:10.2760/06282, JRC114416.

# Contents

Acknowledgements .....	1
Abstract .....	2
1 Introduction.....	3
2 Experimental data.....	4
2.1 Zero drift campaign.....	4
2.1.1 PEMS used in the campaign.....	4
2.1.2 Zero drift testing procedure.....	4
2.1.3 Zero drift under drastic ambient temperature changes.....	8
2.2 JRC PEMS data from market surveillance pilot project activities.....	9
3 Results of the zero drift campaign.....	11
3.1 AVL-MOVE .....	11
3.1.1 Nitrogen monoxide NO.....	11
3.1.2 Nitrogen dioxide NO <sub>2</sub> .....	12
3.1.3 Nitrogen oxides NO <sub>x</sub> .....	13
3.1.4 Carbon dioxide CO <sub>2</sub> .....	14
3.1.5 Carbon monoxide CO.....	15
3.2 HORIBA OBS-ONE.....	17
3.2.1 Nitrogen monoxide NO.....	17
3.2.2 Nitrogen dioxide NO <sub>2</sub> .....	18
3.2.3 Nitrogen oxides NO <sub>x</sub> .....	18
3.2.4 Carbon dioxide CO <sub>2</sub> .....	19
3.2.5 Carbon monoxide CO.....	20
3.3 AIP-PEMS (Gen 2).....	21
3.3.1 Nitrogen monoxide NO.....	21
3.3.2 Nitrogen dioxide NO <sub>2</sub> .....	22
3.3.3 Nitrogen oxides NO <sub>x</sub> .....	23
3.3.4 Carbon dioxide CO <sub>2</sub> .....	24
3.3.5 Carbon monoxide CO.....	25
3.4 SENSORS SEMTECH LDV.....	26
3.4.1 Nitrogen monoxide NO.....	27
3.4.2 Nitrogen dioxide NO <sub>2</sub> .....	28
3.4.3 Nitrogen oxides NO <sub>x</sub> .....	28
3.4.4 Carbon dioxide CO <sub>2</sub> .....	29
3.5 Static tests.....	30
3.5.1 Constant ambient conditions.....	30
3.5.2 Gradual changes of temperature.....	33
3.5.2.1 Temperature change from 23 °C to -7 °C.....	33

3.5.2.2	Constant -7 °C temperature.....	35
3.5.2.3	Temperature change from -7 °C to 23 °C.....	36
3.5.3	Drastic temperature changes.....	38
3.5.3.1	Test with AVL-MOVE.....	38
3.5.3.2	Tests with HORIBA OBS-ONE.....	41
4	Evaluation of JRC PEMS activity.....	47
4.1	Zero drift of NO, NO <sub>2</sub> , and NO <sub>x</sub> .....	47
4.2	PEMS validations.....	54
4.3	Zero drift of the exhaust mass flowmeter.....	57
5	NO <sub>x</sub> margin proposal.....	60
6	Conclusions.....	66
	References.....	67
	List of abbreviations and definitions.....	68
	List of figures.....	69
	List of tables.....	72

## **Acknowledgements**

The authors gratefully acknowledge the Joint Research Centre Vehicle Emissions Laboratory (VELA) personnel (Bigozzi Lisa, Bonato Christian, Buchet Philippe, Cadario Mauro, Canevari Pierluigi, Centurelli Mario, Cotogno Giulio, Forloni Fabrizio, Forni Fausto, Le Lijour Philippe, Lesueur Dominique, Montigny François, Otura Marcos, Padovan Valter, Quarto Riccardo, Sculati Mirco, Zappia Alessandro) for their contribution to the testing activities.

The authors thank AIP Automotive for providing a unit of their AIP-PEMS for the testing activities at JRC, and in particular the support from Roman Felder and Stefan Keller.

The authors thank Sensors Europe GmbH for providing a unit of their SEMTECH LDV PEMS for the testing activities at JRC, and in particular the support from Herbert Münch and Sawan Gandhi.

## **Authors**

Valverde, V., Giechaskiel, B., Carriero, M.

## **Abstract**

Previous research of a proper margin value for Nitrogen Oxides to account for the additional measurement uncertainty of Portable Emissions Measurement Systems (PEMS) as compared to standard laboratory equipment in the context of the Real Driving Emissions (RDE) Regulation identified zero drift as an important component of uncertainty.

This report describes an experimental campaign carried out by the Joint Research Centre during 2018 and 2019 to assess zero drift of PEMS gas analysers under real life operation. The instruments considered in the analysis, from four large manufacturers, cover probably the whole PEMS market in Europe. The tested instruments belong to the generation of PEMS currently available in the market.

The results of the testing campaign (measuring zero every 10-20 min on the road) showed that there is not a systematic positive or negative drift, neither a systematic step nor linear drift for any of the pollutants considered (NO, NO<sub>2</sub>, CO<sub>2</sub>, CO) for all PEMS manufacturers tested. On most of the tests performed, the zero drift for NO<sub>x</sub> is lower than 3 ppm under a variety of ambient temperature and humidity conditions. Additional tests done on more stringent environmental conditions (high altitude mountain driving) show a similar pattern for zero drifts of all pollutants. Vehicle technology (spark ignition or compression ignition), PEMS installation location (cabin or trailer hook), ambient temperature and humidity, and altitude do not appear to be critical elements affecting the zero drift as results are similar for all the aforementioned conditions.

In general, the evidence gathered during the campaign does not verify the worst case drift scenario used to define the 0.43 NO<sub>x</sub> margin, and it can be used to justify a further reduction of the margin value. Based on the worst case scenario for zero drift of the JRC testing campaign and considering the effect on a vehicle with large engine displacement (largest effect in terms of NO<sub>x</sub> mass), the updated NO<sub>x</sub> margin that is proposed is 0.32.

# 1 Introduction

Regulation (EU) 2016/427 (first regulatory package of the Real Driving Emissions regulation, RDE1) introduced on-road testing with Portable Emissions Measurement Systems (PEMS) to complement the laboratory Type I test for the type-approval of light-duty vehicles in the EU. Subsequently, Regulation (EU) 2016/646 (RDE2) introduced Real Driving Emissions (RDE) conformity factors (CF) for nitrogen oxides (NO<sub>x</sub>) emissions. The CF requires full compliance with the Euro 6 limits but allows a margin to account for the additional measurement uncertainty of PEMS relative to standard laboratory equipment ( $CF = 1 + \text{margin}$ ). NO<sub>x</sub> CFs were introduced in two steps:  $CF_{\text{step1}} = 2.1$  applicable upon the request of the manufacturer from September 2017 to all new types (and September 2019 to all new vehicles), and  $CF_{\text{step2}} = 1.5$  applicable from January 2020 for new types (and January 2021 for all new vehicles). Both regulations (RDE1 and RDE2) were consolidated in the Worldwide harmonised Light-duty vehicles Test Procedures (WLTP) Regulation (EU) 2017/1151 and further developed by Regulation (EU) 2017/1154 (RDE3), which also introduced an RDE conformity factor for the on-road test of solid particle number (PN) emissions ( $CF = 1.5$ ). Recital 10 of the RDE Regulation 2016/646 foresees that the European Commission reviews the appropriate level of the final conformity factor in light of technical progress of PEMS; a task that has been assigned to the European Commission's Joint Research Centre (JRC). The fourth and last RDE regulatory package Regulation (EU) 2018/1832 (RDE4) updated the NO<sub>x</sub>  $CF_{\text{final}}$  to 1.43 based on an ad-hoc review of the PEMS measurement uncertainty performed by the JRC in 2017 (Giechaskiel *et al.*, 2018).

In addition to proposing a reviewed value for the NO<sub>x</sub> margin, the 2017 JRC report laid out the framework for subsequent margin reviews. This methodological framework for calculating the additional uncertainty of the PEMS respect to laboratory equipment is based on the assessment of the individual uncertainty of the PEMS components (gas analysers, exhaust mass flow meter, positioning system, etc.) and considering the error propagation rule along the cascade of measurement systems in real life operating conditions.

The 2017 JRC report identified the zero drift of gas analysers (i.e. the difference in zero reading between the pre-test and the post-test) as a major contributor to the final value of the margin. The lack of experimental data on zero drift throughout RDE tests did not allow quantifying its influence on the uncertainty of the measurement. Therefore, two scenarios of the zero drift were hypothesized in order to calculate the margin:

- A linear drift, in which zero drift occurs linearly from the beginning of the test and reaches 5 ppm (maximum permissible zero drift for NO<sub>x</sub>) at the end of the test (120 minutes, which is the maximum duration of an RDE test).
- A step drift (worst case scenario), in which the 5 ppm of NO<sub>x</sub> drift occurs immediately at the beginning of the test and remains constant for the whole duration of the test. The step drift hypothesis was considered for the establishment of the 0.43 margin to be used from 2020.

The objective of this report is to provide technical evidence of the zero drift from a dedicated experimental campaign performed by JRC on PEMS units of four instrument providers covering all commercially available systems in Europe. In addition, the effect of ambient conditions (temperature and altitude) on the performance of the PEMS and, the uncertainty of the exhaust flow meter is discussed based on the PEMS testing activity of the JRC in the context of Market Surveillance pilot project (Valverde *et al.*, 2019).

A new value for the NO<sub>x</sub> margin is proposed in light of the experimental results.

## 2 Experimental data

### 2.1 Zero drift campaign

#### 2.1.1 PEMS used in the campaign.

With the aim of quantifying the zero drift of gas analysers under working operating conditions a set of dedicated PEMS tests have been performed by JRC in the period May 2018 to January 2020.

PEMS units of the four main instrument manufacturers in Europe were used: [AVL-MOVE](#), [HORIBA OBS-ONE](#), [AIP-PEMS \(Gen 2\)](#), and [SENSORS SEMTECH LDV](#). All the instruments correspond to PEMS units that are commercially available in the market (i.e., not prototypes but existing technology in the market).

The testing included three different units of AVL-MOVE and one unit of HORIBA OBS-ONE, all belonging to JRC. In addition, one unit of AIP-PEMS and one unit of SENSORS SEMTECH LDV, provided by AIP Automotive (Haldenwang, Germany) and SENSORS (Erkrath, Germany), respectively were used in the testing campaign.

The units of the four instrument manufacturers fulfil the technical requirements for PEMS as established by the RDE regulation (Appendix 2). **Table 1** summarises the measurement principles of the PEMS used.

**Table 1.** Measurement principles of the gas PEMS instruments used in the zero drift campaign

PEMS manufacturer	AVL	HORIBA	AIP	SENSORS
CO/CO <sub>2</sub> analyser	NDIR <sup>(1)</sup>	NDIR <sup>(1)</sup>	NDIR <sup>(1)</sup>	NDIR <sup>(1)</sup>
NO analyser	NDUV <sup>(2)</sup>	CLD <sup>(3)</sup>	CLD <sup>(3)</sup>	NDUV <sup>(2)</sup>
NO <sub>2</sub> analyser	NDUV <sup>(2)</sup>	Calculated from NO and NO <sub>x</sub>	PAS <sup>(4)</sup>	NDUV <sup>(2)</sup>

<sup>(1)</sup> NDIR: Non-Dispersive Infrared Detection.

<sup>(2)</sup> UV: Non-Dispersive Ultra-Violet Detection.

<sup>(3)</sup> CLD: Chemiluminescence Detection.

<sup>(4)</sup> PAS: Photoacoustic Spectroscopy.

Source: JRC, 2020.

#### 2.1.2 Zero drift testing procedure.

For each test, the PEMS unit was installed on-board of the vehicles following the manufacturer's recommendations, either inside the cabin or on the trailer hook (**Figure 1**). The testing was performed following the best practices for the preparation, the execution, and the follow-up of emissions tests with PEMS as described in Valverde and Bonnel (2018) with a single PEMS unit per test. The vehicle with the PEMS installed was soaked inside a facility with an ambient temperature between 20°C and 25 °C. For two of the tests performed in January 2020 with the SENSORS unit, when the ambient temperature was ~ 0 °C, the PEMS and the vehicle were soaked in the exterior to avoid abrupt changes of temperature following the manufacturer's operational requirements.

The standard pre-test and post-test procedures were systematically followed on all tests. The PEMS was set to sample from the vehicle exhaust following the regulated procedures. A nitrogen (N<sub>2</sub>) bottle, fulfilling the specifications of Sub-Annex 5 of Annex XXI to Regulation 2017/1151, was placed on-board of the vehicle (**Figure 1**) and at regular intervals of 10 to 20 minutes (depending on the test and the instrument), zero response checks were performed while the vehicle was running following a predefined route. The N<sub>2</sub> bottle was connected to the zero inlet of the instrument. By this means, the zero drift was directly measured along the duration of the test under real life operation conditions (thus considering the effects of vibrations, temperature and humidity, altitude, etc. on the zero drift of the analysers). For the tests done with the AVL-MOVE, each zero check lasted ~ 90 seconds, ~ 120 seconds for the OBS-ONE, ~ 100 seconds for the AIP-PEMS, and ~ 90 seconds for the SENSORS.

The campaign covered three routes: 2 RDE compliant routes (RDEc in **Table 2**), and 1 route with only urban drive uphill and downhill a mountain of  $\sim 1100$  masl (HighAlt in **Table 2**). Additional details on the RDE compliant routes (ESP and LAB) and the altitude route (SAC) are detailed elsewhere (Valverde *et al.*, 2019). On the altitude route, the cumulative positive elevation gain (1700 m/100 km) exceeded the permissible RDE limit (1200 m/100 km) and it was driven in order to measure zero drift under stringent conditions of use and assess potential influence of the altitude on the operation of the PEMS. In order to collect as much data as possible the sampling was not stopped at the end of the routes but when the vehicle re-entered the facilities just prior to the post-test procedure, which lead to measurements beyond the 2-hour limit set on the RDE regulation.

In total, 27 zero drift tests were performed during the campaign on running vehicles. Three tests were done with the HORIBA OBS-ONE (mounted on a C-segment, diesel passenger car, with an engine displacement of 1560 cc); four tests were done on the AIP-PEMS (on a D-segment, diesel passenger car with an engine displacement of 1968 cc); and four tests were performed with the SENSORS SEMTECH LDV (on a multi-purpose diesel vehicle, with an engine displacement of 1968 cc). Sixteen tests were performed with AVL-MOVE units: five tests with unit AVL-1, seven with AVL-2, and four tests with the unit AVL-3. The AVL-MOVE units were mounted on a variety of vehicles including 6 passenger cars (segments B and C) and 1 light commercial vehicle. Details on instruments, frequency of zero checks, vehicles and ambient conditions during each test are presented in **Table 2**.

The testing took place around the JRC Ispra site in Northern Italy in the period of May to October 2018 (AVL-MOVE units), August-October 2019 (HORIBA OBS-ONE unit), November 2019 (AIP-PEMS), and January 2020 (SENSORS SEMTECH LDV).

**Figure 1.** Overview of PEMS installations on the trailer hook for the three PEMS instruments assessed: a) AVL-MOVE, b) HORIBA OBS-ONE, c) AIP-PEMS, d) SENSORS SEMTECH LDV and e) fixation of N<sub>2</sub> bottle on-board the vehicle.



Source: JRC, 2020.

In order to further assess the zero drift, additional tests were performed with the AVL, HORIBA, and SENSORS systems on static vehicles.

On one hand, three tests were done at constant ambient temperature with AVL and HORIBA units. During the first static test with the AVL-MOVE, the vehicle was kept with the engine off, whereas in the second test, the vehicle was switched on and kept on idling with high idle accelerations every 20-30 min for the duration of the test. Both tests were performed on vehicle 5 with AVL-1 mounted in the cabin (**Table 2**) and the vehicle was kept inside the testing facility to avoid influences of varying ambient conditions. One additional static test was performed with the HORIBA OBS-ONE mounted in the cabin of a vehicle that was kept inside the facility at constant ambient temperature with the engine off along the test. All static tests had pre-test and post-test properly performed and zero checks were done every 10-15 minutes for a duration of 2 hours. All components of the PEMS were installed and used as if the vehicle was running an RDE test.

On the other hand, additional static tests were performed with the HORIBA, the SENSORS, and the AVL PEMS to assess the effect of a gradual change of ambient temperature on the zero drift. PEMS units were soaked in a climatic chamber at an ambient temperature of 23 °C, the pre-test calibration was also performed at 23 °C. Then, periodic zero response checks were performed at a regular interval of 10 minutes while the ambient temperature was set to reach -7 °C (reached after 90-100 minutes). The post-test was performed at -7 °C. Then, a pre-test was performed at -7 °C and the zero drift was measured for ~ 60 minutes at a constant -7 °C temperature (only for HORIBA and SENSORS). Then, on both instruments, zero drift was measured on the ramp-up of the ambient temperature from -7 °C to 23 °C (~ 60 minutes). On this third test, the pre-test was performed at -7 °C and the post-test at 23 °C. The test done on the AVL-1 unit was done independently from the PEMS of the other manufacturers, and it also included a test to check the zero drift change when the ambient temperature was set to increase gradually from -7 °C to 23 °C.

**Table 2.** Overview of testing conditions including PEMS installation location (PEMS loc.), ambient temperature (T) and relative humidity (RH) range and average (av.) conditions. The characteristics of the vehicles are fully described in Valverde et al., (2019) using the same vehicle codes except for tests 19-30.

Test #	Vehicle id	Fuel type	Eng. disp. [cc]	Route type	PEMS id	PEMS loc.	Zero check freq. [min]	Range (av.) T [°C]	Range (av.) RH [%]
T01	VW040	Gasoline	1395	RDEc	AVL-1	Hook	15	17-24 (18)	58-90 (82)
T02	NN009	Gasoline	1197	RDEc	AVL-2	Hook	15	15-20 (18)	60-80 (73)
T03	NN009	Gasoline	1197	RDEc	AVL-2	Hook	10	10-20 (14)	39-72 (60)
T04	OL002	Diesel	1248	RDEc	AVL-3	Cabin	15	17-23 (20)	58-80 (73)
T05	PT011	Diesel	1499	RDEc	AVL-2	Cabin	15	22-24 (23)	38-52 (46)
T06	OL003	Diesel	1598	RDEc	AVL-1	Cabin	10	14-21 (17)	56-83 (72)
T07	FT061	CNG	2999	RDEc	AVL-3	Cabin	15	24-36 (28)	22-61 (47)
T08	VW040	Gasoline	1395	HighAlt	AVL-1	Hook	15	15-24 (20)	57-88 (70)

<b>Test #</b>	<b>Vehicle id</b>	<b>Fuel type</b>	<b>Eng. disp. [cc]</b>	<b>Route type</b>	<b>PEMS id</b>	<b>PEMS loc.</b>	<b>Zero check freq. [min]</b>	<b>Range (av.) T [°C]</b>	<b>Range (av.) RH [%]</b>
T09	NN009	Gasoline	1197	HighAlt	AVL-2	Hook	10	17-24 (21)	47-73 (58)
T10	NN009	Gasoline	1197	HighAlt	AVL-2	Hook	10	12-21 (17)	33-60 (45)
T11	OL002	Diesel	1248	HighAlt	AVL-3	Cabin	15	15-25 (22)	49-78 (62)
T12	PT011	Diesel	1499	HighAlt	AVL-2	Cabin	15	25-32 (29)	24-42 (34)
T13	OL003	Diesel	1598	HighAlt	AVL-1	Cabin	10	17-25 (22)	46-67 (54)
T14	OL003	Diesel	1598	HighAlt	AVL-1	Cabin	10	17-23 (21)	51-68 (58)
T15	FT061	CNG	2999	HighAlt	AVL-3	Cabin	15	24-34 (30)	23-46 (33)
T16	FT060	LPG	1368	HighAlt	AVL-2	Cabin	15	15-27 (23)	46-91 (62)
T17	OL003	Diesel	1598	Static	AVL-1	Cabin	15	22-23 (22)	39-42 (40)
T18	OL003	Diesel	1598	Static	AVL-1	Cabin	15	19-19 (19)	38-39 (39)
T19	-	Diesel	1560	RDEc	HORIBA	Hook	15	14-23 (17)	44-76 (62)
T20	-	Diesel	1560	HighAlt	HORIBA	Hook	15	16-23 (20)	41-68 (54)
T21	-	Diesel	1560	HighAlt	HORIBA	Hook	15	11-23 (15)	50-92 (74)
T22	-	Gasoline/Electric	2487	Static	HORIBA	Cabin	15	26-26 (26)	71-72 (72)
T23	-	Diesel	1968	RDEc	AIP	Hook	20	8-18 (11)	47-94 (79)
T24	-	Diesel	1968	RDEc	AIP	Hook	20	11-19 (12)	46-89 (77)
T25	-	Diesel	1968	HighAlt	AIP	Hook	20	4-13 (7)	71-99 (98)

Test #	Vehicle id	Fuel type	Eng. disp. [cc]	Route type	PEMS id	PEMS loc.	Zero check freq. [min]	Range (av.) T [°C]	Range (av.) RH [%]
T26	-	Diesel	1968	HighAlt	AIP	Hook	20	3-17 (7)	73-99 (99)
T27	-	Diesel	1968	RDEc in.soak	SENSORS	Hook	15	5-15 (7)	20-25 (22)
T28	-	Diesel	1968	RDEc out.soak	SENSORS	Hook	10	-1-13 (6)	30-87 (60)
T29	-	Diesel	1968	HighAlt in.soak	SENSORS	Hook	10	7-19 (11)	16-49 (30)
T30	-	Diesel	1968	HighAlt out.soak	SENSORS	Hook	10	8-16 (12)	17-45 (32)
T31	-	-	-	Static	SENSORS	-	10	23 to -7	30-50
T32	-	-	-	Static	SENSORS	-	10	-7	50
T33	-	-	-	Static	SENSORS	-	10	-7 to 23	20-70
T34	-	-	-	Static	HORIBA	-	10	23 to -7	30-50
T35	-	-	-	Static	HORIBA	-	10	-7	50
T36	-	-	-	Static	HORIBA	-	10	-7 to 23	20-70
T37	-	-	-	Static	AVL-1	-	10	23-7	30-50
T38	-	-	-	Static	AVL-1	-	10	-7 to 23	20-60

Source: JRC, 2020.

### 2.1.3 Zero drift under drastic ambient temperature changes.

The RDE regulation defines a set of boundary conditions outside which, on-road tests with PEMS are not considered valid to assess emissions compliance against the limits. The valid ambient temperature conditions range from -7 °C to 35 °C and are defined to cover most of the European driving conditions, and to meet the temperature ranges in which PEMS can operate properly. In addition, vehicles and PEMS can be soaked at the same range of temperatures including soaking in the exterior and in the interior of buildings. This range of possibilities enables the option to test a vehicle on the road at cold ambient temperature (-7 °C) whereas its soak and pre-test has been performed inside a facility at controlled ambient temperature (e.g., 25 °C). The same situation can occur at the end of the RDE test: a vehicle tested at cold ambient temperature in the road may be driven inside a facility with much warmer temperature than outside. This drastic change of operating conditions of PEMS instruments (i.e., changing up to 40 °C in few seconds) could affect their measurement performance.

In this context, three ad-hoc tests were performed to evaluate the effect on zero drift. One test was performed with one of the units of AVL-MOVE (AVL-1) on board the cabin of a diesel passenger car, with an engine displacement of 1597 cc, and two others with the OBS-ONE unit in the cabin of a passenger car (**Table 2**). For the test done with the AVL-MOVE, the vehicle was soaked at ambient temperature inside a facility (~25 °C). After the pre-test operation, the vehicle was quickly driven (few seconds) inside a climatic chamber with an ambient temperature of -7 °C and a relative humidity of 70%. The vehicle was kept with the engine off and the PEMS was set to perform zero response checks every 10 minutes with an N<sub>2</sub> bottle connected in the zero inlet of the PEMS. In between zero checks, the PEMS was sampling ambient air. The post-test was performed inside the climatic chamber and the zero drift was assessed.

The first test with the HORIBA-OBS ONE replicated the test protocol described above for the AVL-MOVE with the following differences: the vehicle was soaked at 21 °C and the climatic chamber was set to operate at -2 °C and a relative humidity of 80%. Also the vehicle was driven inside the climatic chamber using the electric motor of the vehicle. In the second test with HORIBA OBS-ONE, the vehicle was soaked inside the climatic chamber at -7 °C, the pre-test and main test were performed at that same temperature and after two hours, the vehicle was driven out of the climatic chamber using the internal combustion engine to perform the post-test check at an ambient temperature of 23 °C. Zero response checks were performed every 20 minutes.

## 2.2 JRC PEMS data from market surveillance pilot project activities

Over recent years, the JRC has continuously measured light-duty vehicle's tailpipe emissions with PEMS in support of the development of the RDE regulation; the improvement of test protocols to identify defeat devices; and to assess emissions compliance in preparation of the in-service conformity and market surveillance duties. The on-road data gathered throughout 2018 on 19 Euro 6 vehicles with different powertrains, accounting for 185 PEMS tests, has been used to analyse the effect of weather conditions (ambient temperature and humidity), altitude, and PEMS location (in cabin or in the trailer hook) on the zero drift of gas analysers and drift of the exhaust mass flowmeter. For this set of 185 tests, the zero drift, as measured only from the pre-test and post-test measurements, is assessed. Although no intermediate and periodic zero response checks were performed during those tests the large number of tests considered provide a robust approach to the analysis of zero drift in real operation of the PEMS under a wide range of operating conditions.

The test routes, vehicles, and test conditions are detailed elsewhere (Valverde *et al.*, 2019). All considered tests were performed with the AVL-MOVE units described in section 2.1.1. The tests fulfilled the RDE regulation requirements for instruments, pre-test and post-test procedures, and calibration gases. Most routes complied with RDE requirements for driving dynamics, shares of operation, altitude gain, etc. whereas, some others did not (exceed v\*a\_pos95 limits, exceed cumulative positive elevation gain, exceed time duration, not compliance with shares of operation per bin, etc.).

All the PEMS tests conducted throughout 2018 have been systematically included in the analysis disregard if their zero drift was above or below the permissible tolerances. Tests where a regeneration of the diesel particle filter was identified have been also included in the analysis. **Table 3** summarises the PEMS tests considered in the campaign.

PEMS validation consists in comparing the emissions of a given vehicle when driven on the chassis dynamometer as measured simultaneously by the PEMS and laboratory standard equipment. The PEMS validation procedure is fully described in the RDE regulation (Appendix 3). During the routine activity in the JRC, PEMS validations as performed in order to check the correct installation and functionality of the PEMS. The data of 23 PEMS validations performed on a variety of vehicles using the 3 AVL units on two different JRC laboratories (VELA2 and VELA8) is also considered in this PEMS margin assessment to evaluate the performance of the exhaust flowmeter (EFM).

The results of the zero drift of NO and NO<sub>2</sub>, and NO<sub>x</sub> were evaluated for different conditions of PEMS installation location, ambient temperature and humidity, altitude, and fuel type of vehicles, and are included in the analysis in chapter 4 below.

**Table 3.** Overview of JRC 2018 PEMS test for Market Surveillance pilot project. The characteristics of the vehicles are fully described in Valverde et al., (2019) using the same vehicle codes.

<b>Vehicle code</b>	<b># of PEMS tests</b>	<b>PEMS id</b>	<b>PEMS location</b>
FD009	10	AVL- 1	Cabin
LA002	8	AVL- 1	Cabin
OL003	9	AVL- 1	Cabin
RT012	6	AVL- 1	Cabin
SA002	9	AVL- 1	Cabin
TA008	5	AVL- 1	Cabin
VW040	13	AVL- 1	Trailer hook
VW042	12	AVL- 1	Trailer hook
FT060	11	AVL- 2	Cabin
HI002	8	AVL- 2	Cabin
PT011	15	AVL- 2	Cabin
SI001	8	AVL- 2	Cabin
ST001	6	AVL- 2	Cabin
NN009	10	AVL- 2	Trailer hook
VO006	11	AVL- 2	Trailer hook
FT061	12	AVL- 3	Cabin
OL002	9	AVL- 3	Cabin
LR001	12	AVL- 3	Trailer hook
MB010	11	AVL- 3	Trailer hook

Source: JRC, 2020.

### 3 Results of the zero drift campaign

The results of the zero drift campaign are reported per PEMS manufacturer in the order of execution of the tests. In all plots in this section, the vertical brown dashed lines indicate the minimum (90 minutes) and maximum (120 minutes) time duration of an RDE test according to the RDE regulation. The results presented for NO<sub>x</sub> correspond to the sum of the absolute value of the zero drift of NO and the absolute value of the zero drift of NO<sub>2</sub>.

#### 3.1 AVL-MOVE


The zero drift for all measured gases (NO, NO<sub>2</sub>, CO<sub>2</sub>, CO) between the pre-test and the post-test fulfil the permissible zero drift limits on 12/16 tests considered in the report (< 5 ppm for NO/NO<sub>2</sub>/NO<sub>x</sub>, < 2000 for CO<sub>2</sub>, and 75 ppm < for CO). One test (T03) slightly failed the CO zero drift (78 ppm), and three tests exceeded the NO<sub>2</sub> zero drift (T13 had a positive exceedance 6.7 ppm, whereas T06 and T10 had a negative drift -5.3 and -6.1 ppm, respectively at the non-RDE compliant routes).

Results on zero drift are analysed both inside (RDEc) and outside RDE boundary conditions (HighAlt). The three PEMS units were tested on both types of routes (**Table 2**). The data presented correspond to the values reported as zero response for each pollutant by the PEMS software (i.e., average of the zero value over the zero response time). NO and NO<sub>2</sub> zero drift are assessed individually and in combination as Nitrogen Oxides (NO<sub>x</sub>).

##### 3.1.1 Nitrogen monoxide NO


NO zero drift is lower than ±2 ppm on all tests on all intermediate zero checks, both when operated in RDE compliant routes (**Figure 2**), and in the high altitude route (**Figure 3**), with 14/16 tests displaying a zero drift within ±1 ppm on all intermediate steps. NO zero drift is always below the permissible value allowed by the regulation and both positive and negative values for zero drift are registered along the duration of the trip. As a general trend for all tests done NO zero drift is stable around 0 ppm with little variability among vehicles and routes. The largest drift is observed when the PEMS was mounted in the cabin of vehicle OLO03, with a negative -1.5 ppm step drift occurring at the beginning of the test (T06) and a positive +1.5 ppm step zero drift after 30 minutes (T13).

**Figure 2.** NO zero drift over RDE compliant routes

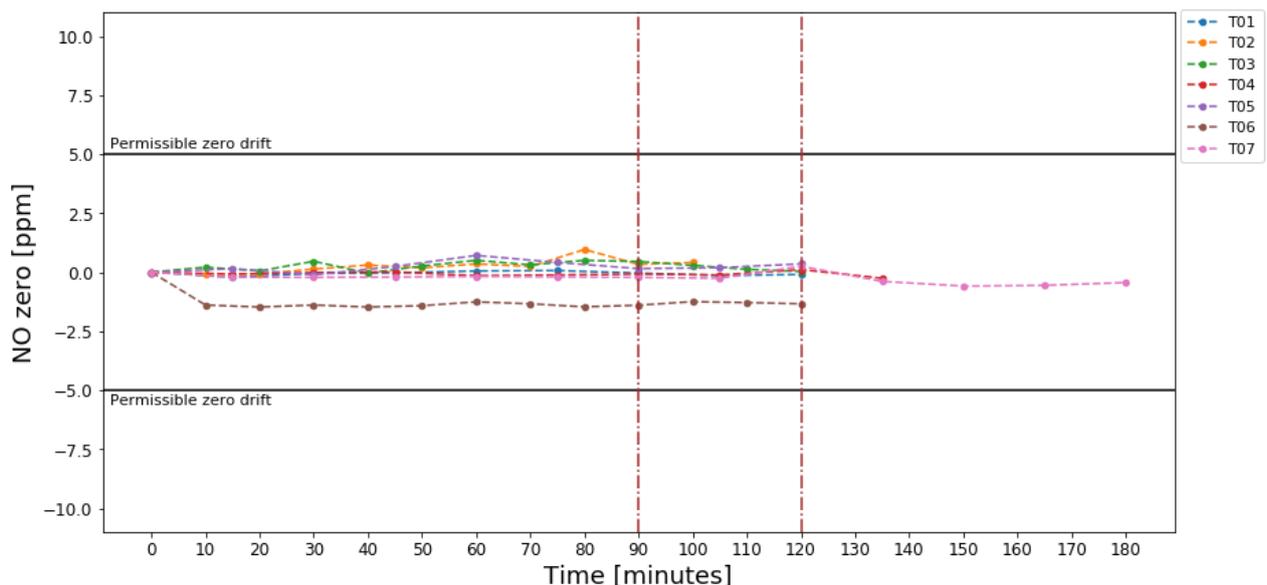

Source: JRC, 2020.

**Figure 3.** NO zero drift over the high altitude route

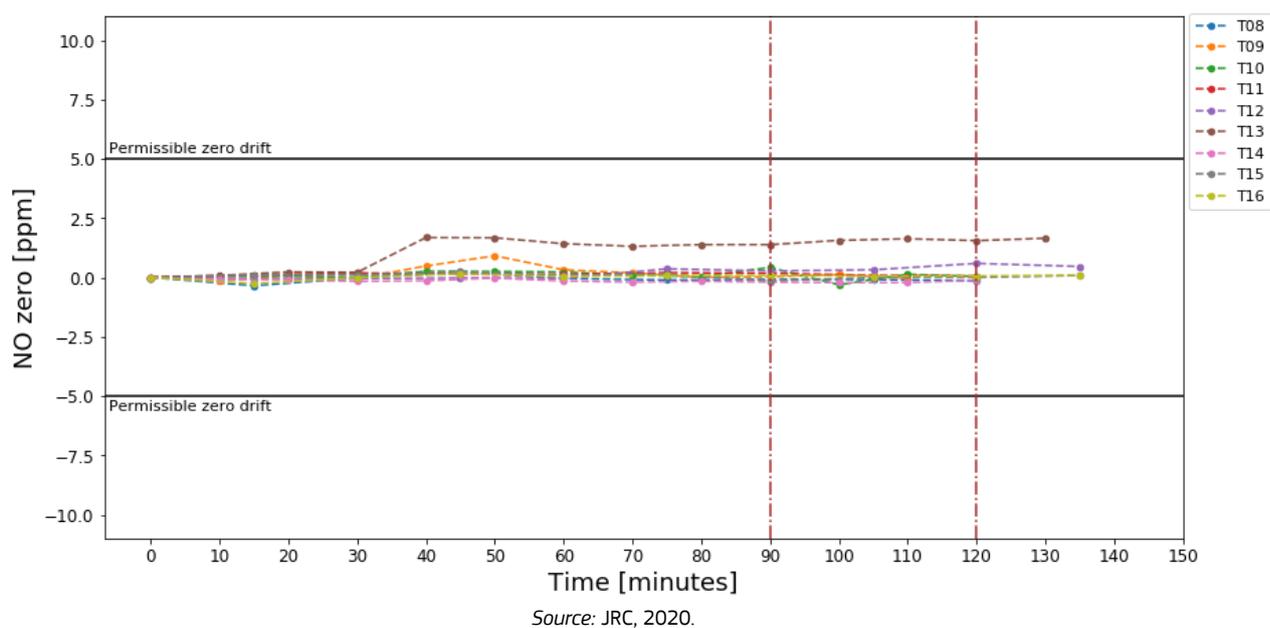

### 3.1.2 Nitrogen dioxide NO<sub>2</sub>

All tests on RDE compliant routes except T06 (**Figure 4**) and on high altitude except T10 and T13 (**Source:** JRC, 2020.


**Figure 5**) had an NO<sub>2</sub> zero drift at the end of the test within the permissible zero drift. As for NO drift, test T06 had a negative NO<sub>2</sub> step drift within the first ten minutes of the test (-5.2 ppm) and the stayed stable along the test leading to an invalid test at the end of the test. Similarly as for NO, T13 registered a positive step drift of NO<sub>2</sub> (7.8 ppm) between 30 and 40 minutes. From that point, the NO<sub>2</sub> drift remained stable around 7 ppm and led to the invalidation of the test for excess of zero drift. It is remarkable that the same PEMS unit (PEMS1 in the cabin of vehicle OL003) had a positive (T13) and a negative (T06) drift exceeding the permissible  $\pm 5$  ppm on tests performed on consecutive days.

For the valid tests (i.e., NO<sub>2</sub> drift at the end of the test within  $\pm 5$  ppm), most of the intermediate zero response checks had an NO<sub>2</sub> drift below  $\pm 5$  ppm for both RDEc and HighAlt routes. However, for RDEc tests, there is no general pattern for NO<sub>2</sub> zero drift since some tests display little variability from 0 ppm (T01, T04, T05) while others have a linear positive drift (T07) that reaches circa 5 ppm after two hours of test, whereas for two tests (T02 and T03) there was a positive step drift slightly beyond 5 ppm on the first zero response checks of the tests that went to 0 ppm again on the checks done after 50 minutes. Both T02 and T03 were tests done with the PEMS mounted on the trailer hook but because T01 was also a test with an installation on the trailer hook and showed no drift, no direct relationship can be established between step drifts occurring along the test and the PEMS installation location.


HighAlt routes displayed a similar behaviour as RDEc ones with little zero drift on certain tests with installations in the trailer hook and in the cabin (T08, T11, T14), up and down steps in some other tests (T09, T10, T12), and a step drift of -5 ppm occurring after 40 minutes of drive that is maintained until the end of the test (T16). It is worth noting that T09 is the only valid test during which an exceedance of the permissible zero NO<sub>2</sub> drift (6 ppm) is observed.

The tests with largest NO<sub>2</sub> zero drift (either steps or linear), occurred on vehicles with spark ignition (T02, T03, T07, T09, T10, T16) and compression ignition (T06, T12, T13). This observation points to the fact that the NO<sub>2</sub> drift is independent from vehicle ignition and fuel type.

**Figure 4.** NO<sub>2</sub> zero drift over RDE compliant routes

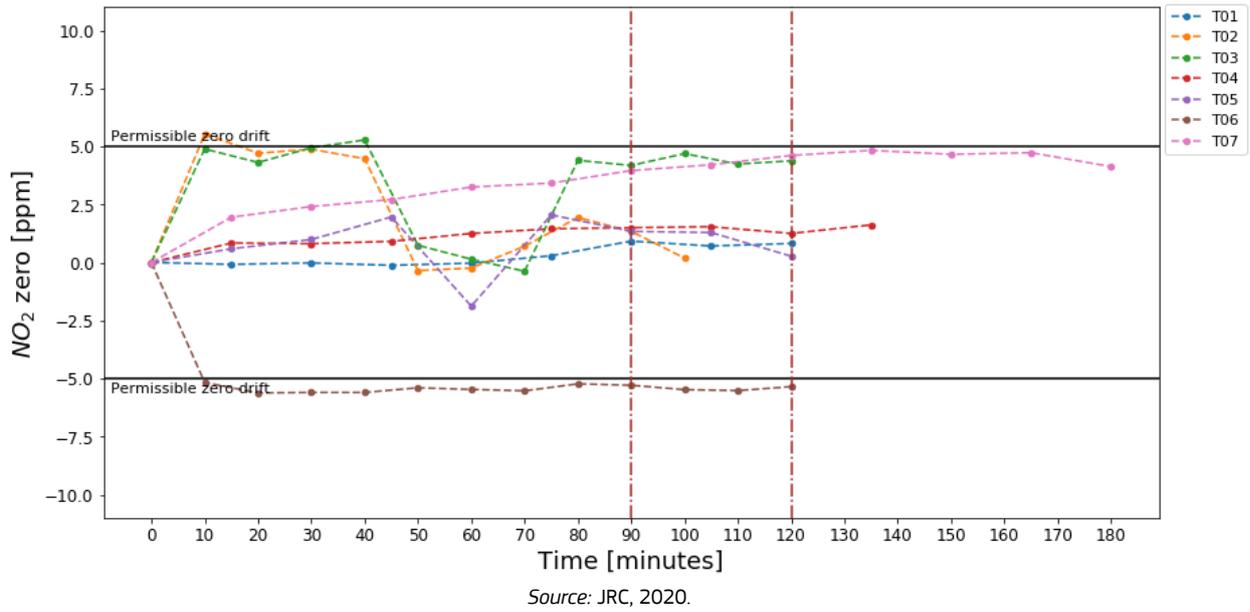

**Figure 5.** NO<sub>2</sub> zero drift over the high altitude route

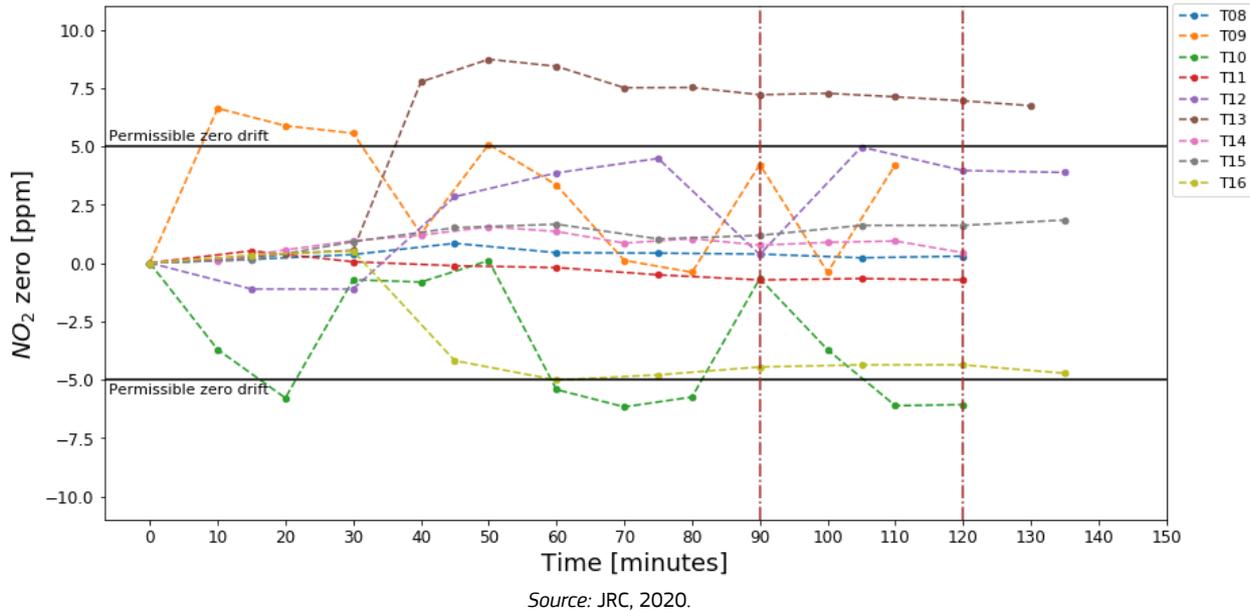

### 3.1.3 Nitrogen oxides NO<sub>x</sub>


The permissible zero drift for NO<sub>x</sub> is established in the RDE regulation to 5 ppm for the combination of NO and NO<sub>2</sub> since not all PEMS are technically designed to measure both pollutants individually. In the case of the AVL-MOVE units used in this campaign both pollutants are measured and observations show that NO<sub>2</sub> has larger zero drift than NO and hence it is responsible for a larger share of the NO<sub>x</sub> measurement uncertainty. It is also important to remember that the NO<sub>2</sub> fraction of the NO<sub>x</sub> emissions is not negligible, ranging 5-20% on gasolines and up to 50% for modern diesel vehicles equipped with oxidising catalysts (O'Driscoll *et al.*, 2018, Suarez-Bertoa *et al.*, 2019). It is therefore very important to measure accurately both NO and NO<sub>2</sub>.

When combined, the NO<sub>x</sub> zero drift repeats essentially the behaviour of the NO<sub>2</sub> zero drift described in section 3.1.2. Under RDE boundary conditions (**Figure 6**), all tests have a NO<sub>x</sub> zero drift below the permissible 5 ppm in all zero checks except for T02 and T03, when NO<sub>x</sub> zero drift is slightly above 5 ppm between minutes 20 and 40 of the test, and T06, when a -6.6 ppm step is registered since the beginning of the test. A more erratic

NO<sub>x</sub> zero drift behaviour is observed on the high altitude tests (**Figure 7**) in particular for tests T09, T10 and T12 where several up and down steps are measured throughout the duration of the tests.


Considering all tests done inside and outside the RDE boundary conditions, it is important to note that the step drift hypothesis for positive NO<sub>x</sub> zero drift is not verified (assuming a positive drift occurring at the beginning of the test and being maintained all over it). With the data available, the worst NO<sub>x</sub> zero drift lies between linear and step drift hypotheses defined by Giechaskiel *et al.*, (2018).

**Figure 6.** NO<sub>x</sub> zero drift over RDE compliant routes

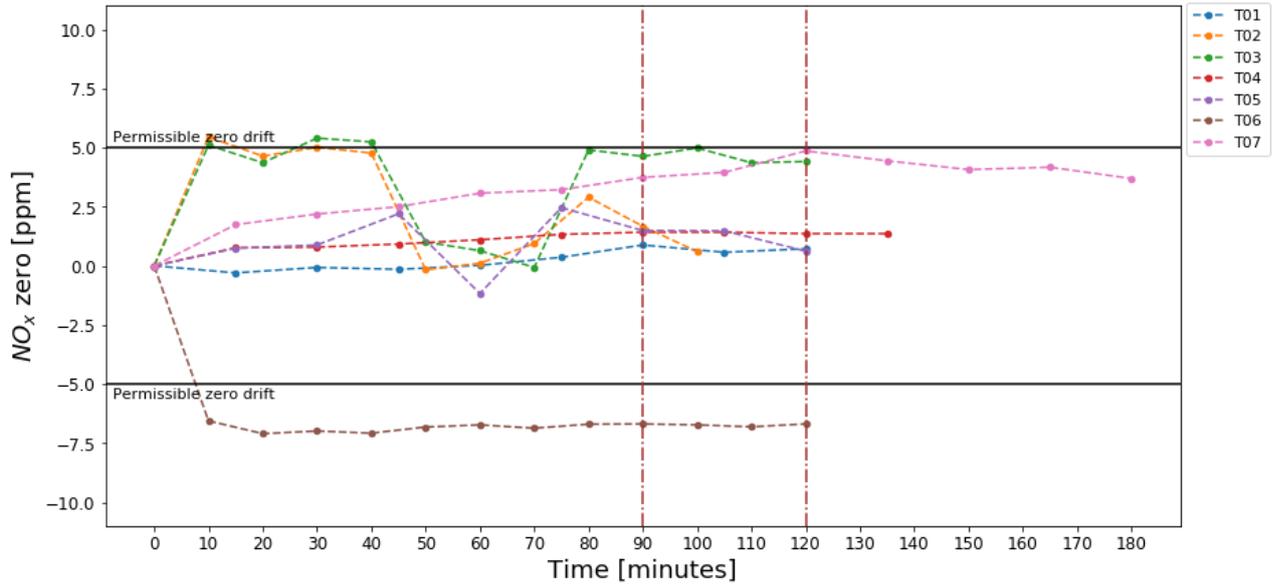

Source: JRC, 2020.

**Figure 7.** NO<sub>x</sub> zero drift over the high altitude route

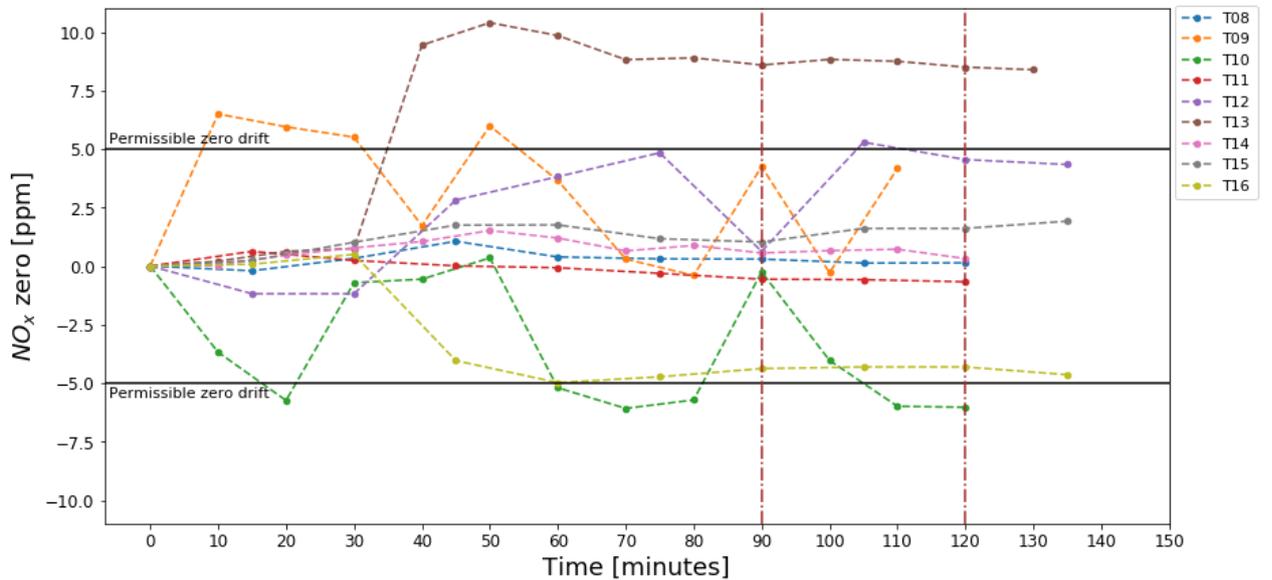


Source: JRC, 2020.

### 3.1.4 Carbon dioxide CO<sub>2</sub>


CO<sub>2</sub> zero drift is < 100 ppm on all tests and all zero intermediate checks, showing low variability among different tests. Although there is some slight variations of the zero response within a given test (from 0 ppm

to 100 ppm), the zero drift is one order of magnitude lower than the permissible CO<sub>2</sub> zero drift (2000 ppm). Results are similar for tests done on RDE compliant routes (**Figure 8**) and on the high altitude tests (**Figure 9**). No differences are observed on CO<sub>2</sub> zero drift among different routes, PEMS installation location or vehicles.

**Figure 8.** CO<sub>2</sub> zero drift over RDE compliant routes

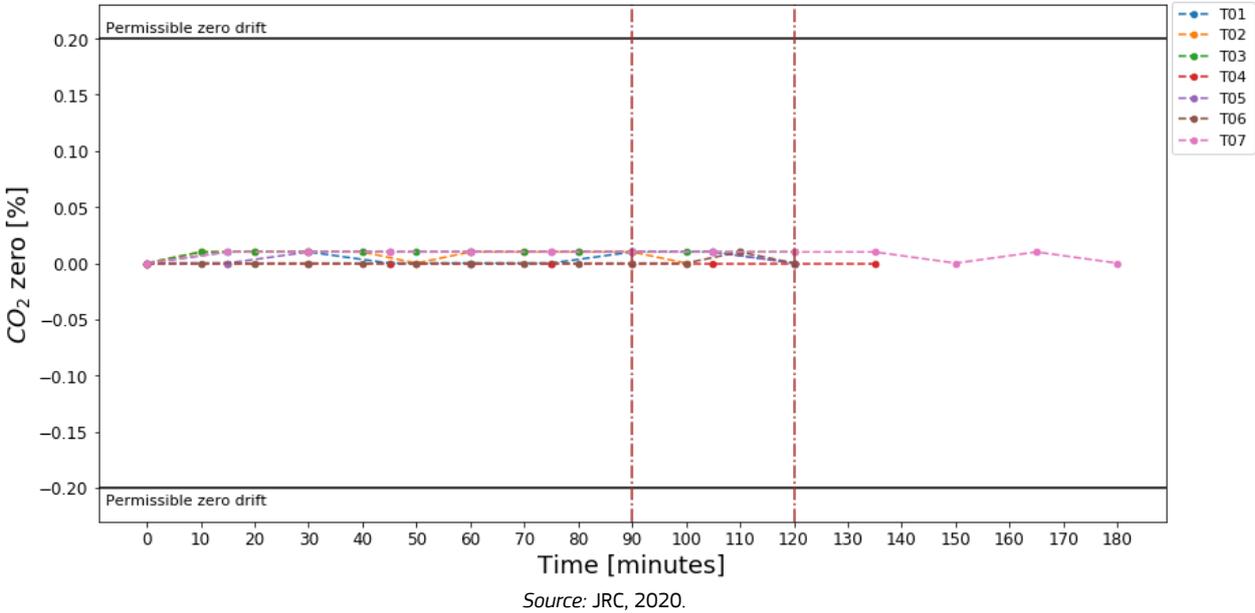

**Figure 9.** CO<sub>2</sub> zero drift over the high altitude route

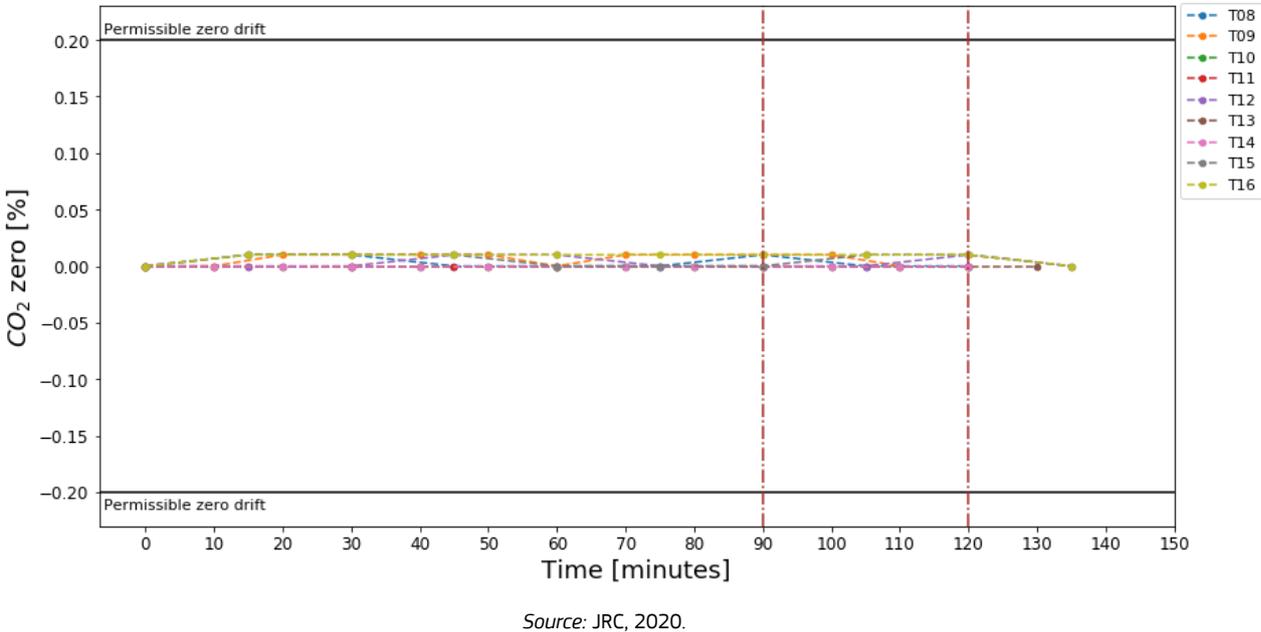


**3.1.5 Carbon monoxide CO**

CO has no margin assigned in RDE regulation. However, since it is currently measured with PEMS its zero drift is also assessed.

From the tests performed in the campaign with the AVL-MOVE, CO zero drift is always within its permissible range allowed by regulation ( $\pm 75$  ppm), except for test T03 which slightly exceeds the limit after 2 hours. For most of the intermediate zero checks, both for tests within RDE boundaries (**Figure 10**) and in the high


altitude route (**Figure 11**), CO zero drift lies within  $\pm 25$  ppm and it is quite stable around 0 ppm. It is worth noting that except for 1 test (T04) the drift is always positive. Two tests show a positive step zero drift (T03, T05) which occurs early in the test and then the drift is increasing linearly until the test end. It is assumed that the CO zero drift is larger on the RDEc tests than on the HighAlt ones, as the former were performed in the morning when the warming-up period of the PEMS was not necessarily long enough to allow a proper operation of the CO analyser (as it was the case on the afternoon tests on the HighAlt route). A longer warm-up time of PEMS has been implemented to avoid this issues as a consequence of this analysis.

**Figure 10.** CO zero drift over RDE compliant routes

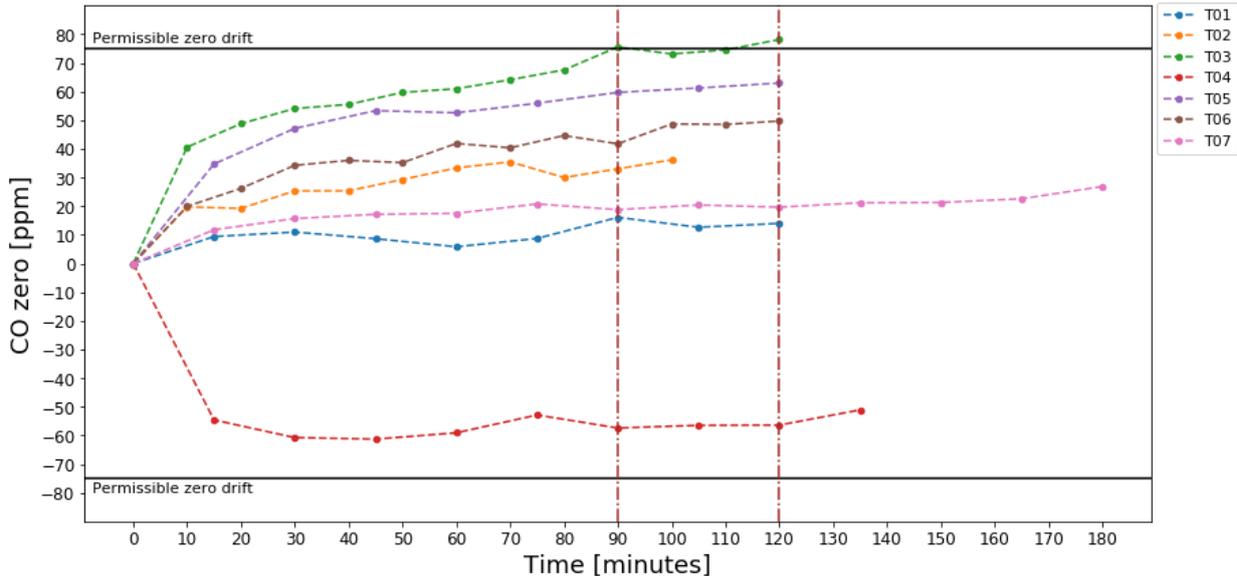

Source: JRC, 2020.

**Figure 11.** CO zero drift over the high altitude routes

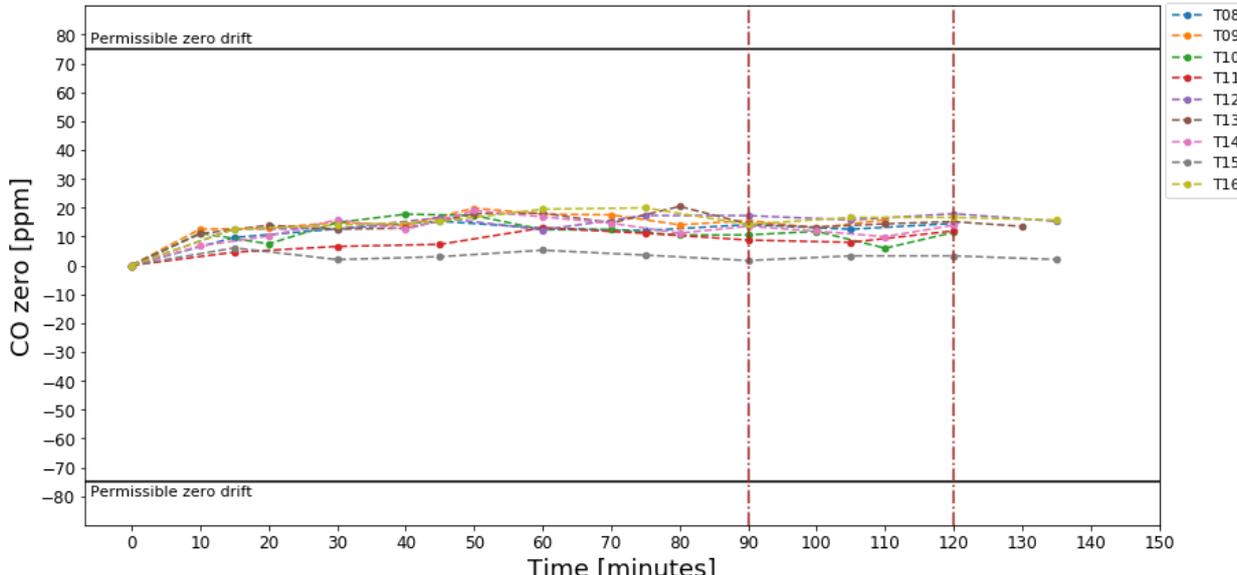

Source: JRC, 2020.


### 3.2 HORIBA OBS-ONE

Zero response checks were performed every ~15 minutes. The zero values reported in the intermediate checks were calculated as the average of the zero response over the zeroing period.


#### 3.2.1 Nitrogen monoxide NO

On the RDEc test (**Figure 12**), the NO zero drift is lower than 2.5 ppm along the trip and does not show a linear positive drift as several upwards and downwards steps are measured. On the HighAlt route (**Figure 13**), both tests show no drift for NO with intermediate zero response checks below 1 ppm.

**Figure 12.** NO zero drift over RDE compliant routes

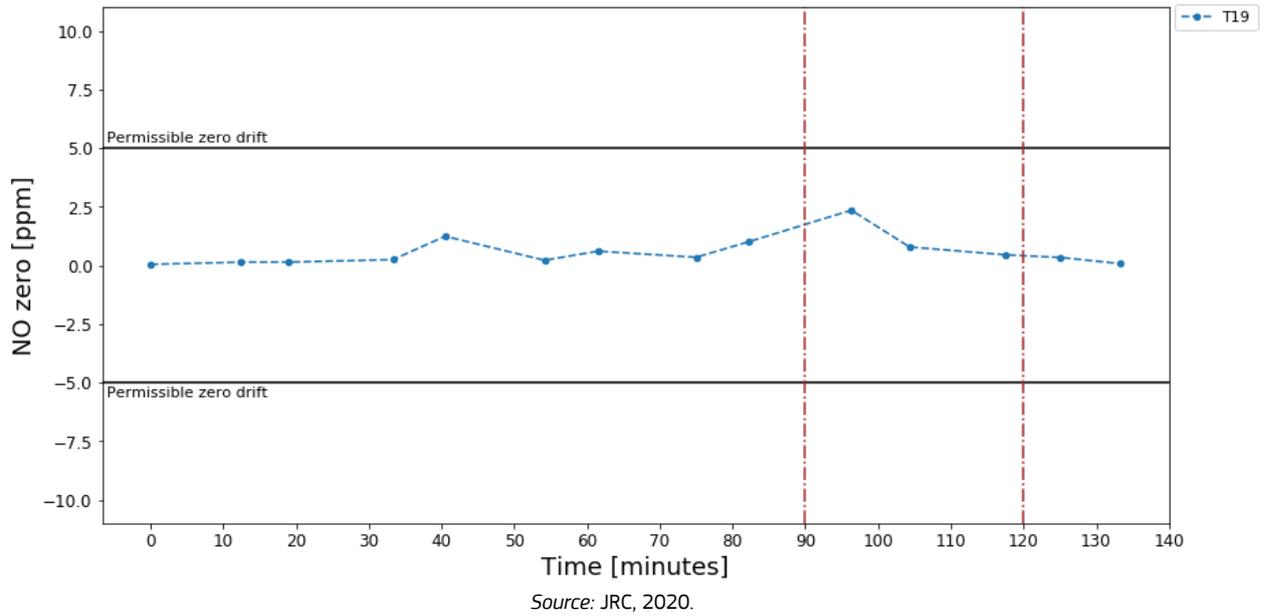


**Figure 13.** NO zero drift over the high altitude route

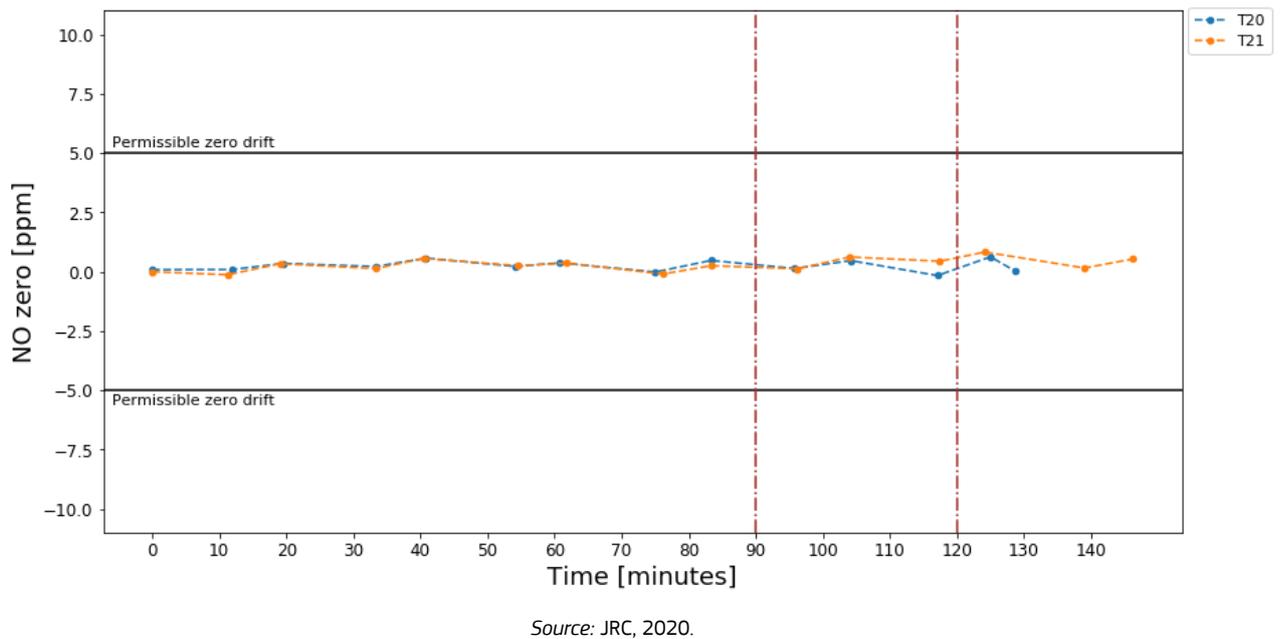

### 3.2.2 Nitrogen dioxide NO<sub>2</sub>


The results for NO<sub>2</sub> are calculated from the difference of NO<sub>x</sub> and NO. The NO<sub>2</sub> zero drift with the HORIBA OBS-ONE shows a similar behaviour as the one described for NO: less than 2.5 ppm on all intermediate stages on all tests performed, both RDEc (**Figure 14**) and HighAlt (**Figure 15**).

**Figure 14.** NO<sub>2</sub> zero drift over RDE compliant routes

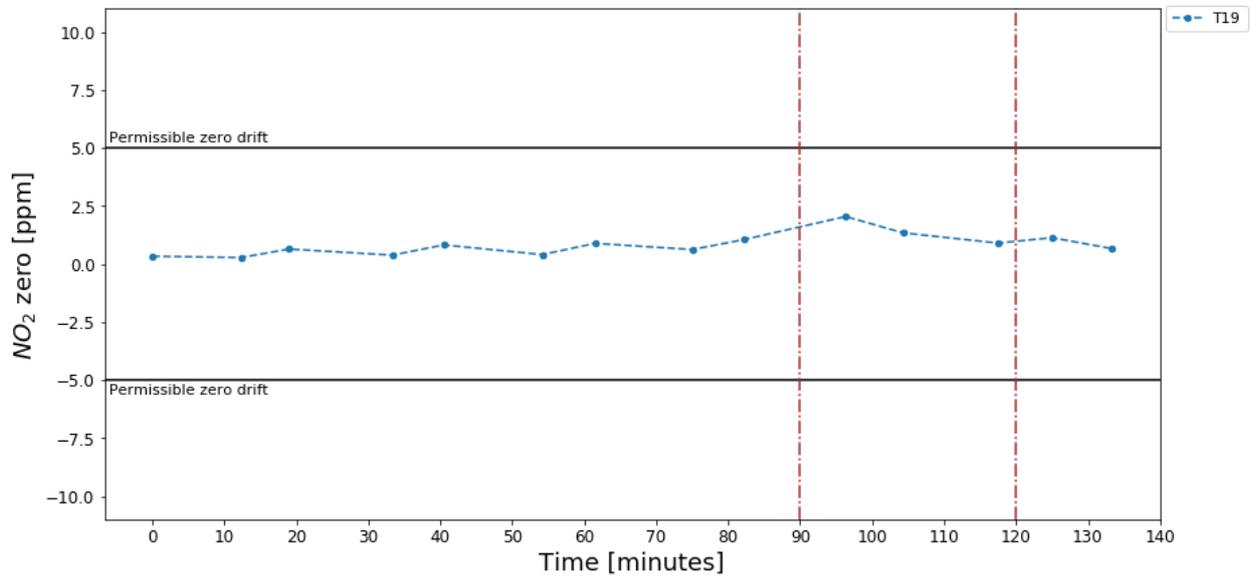

Source: JRC, 2020.

**Figure 15.** NO<sub>2</sub> zero drift over the high altitude route

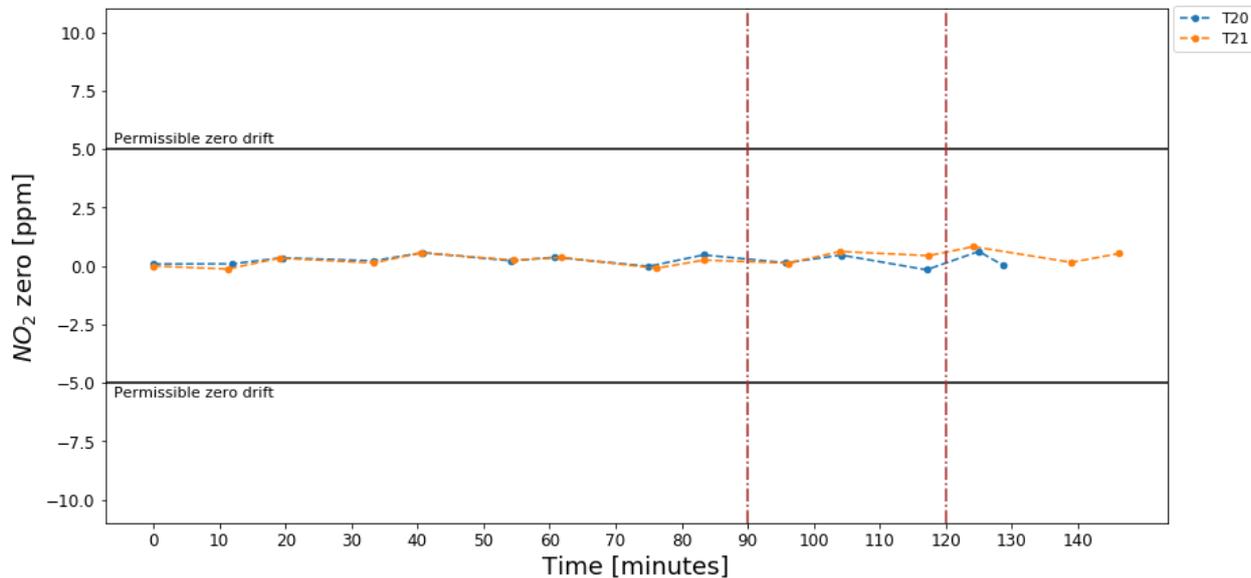


Source: JRC, 2020.

### 3.2.3 Nitrogen oxides NO<sub>x</sub>

In the case of the HORIBA OBS-ONE unit tested, NO and NO<sub>x</sub> analysers are equally responsible of the total NO<sub>x</sub> drift observed in the RDEc route (**Figure 16**) and in the HighAlt tests (**Figure 17**). On all intermediate NO<sub>x</sub> response checks, the NO<sub>x</sub> drift is below the permissible NO<sub>x</sub> drift for the whole test and the maximum NO<sub>x</sub> drift is ~ 4.5 ppm. This maximum NO<sub>x</sub> drift is reduced at the post-test. Considering all tests done with


the HORIBA instrument inside and outside the RDE boundary conditions the step drift hypothesis for positive NO<sub>x</sub> zero drift is not verified. Also, no particular effect of altitude is observed on NO<sub>x</sub> zero drift.

**Figure 16.** NO<sub>x</sub> zero drift over RDE compliant routes

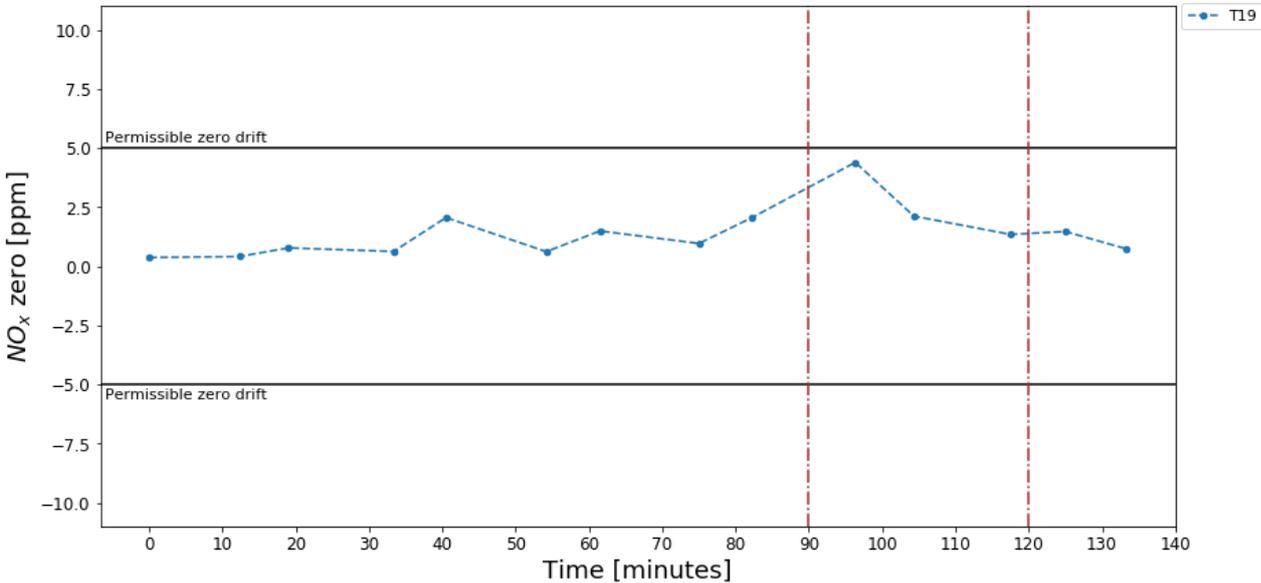

Source: JRC, 2020.

**Figure 17.** NO<sub>x</sub> zero drift over the high altitude route

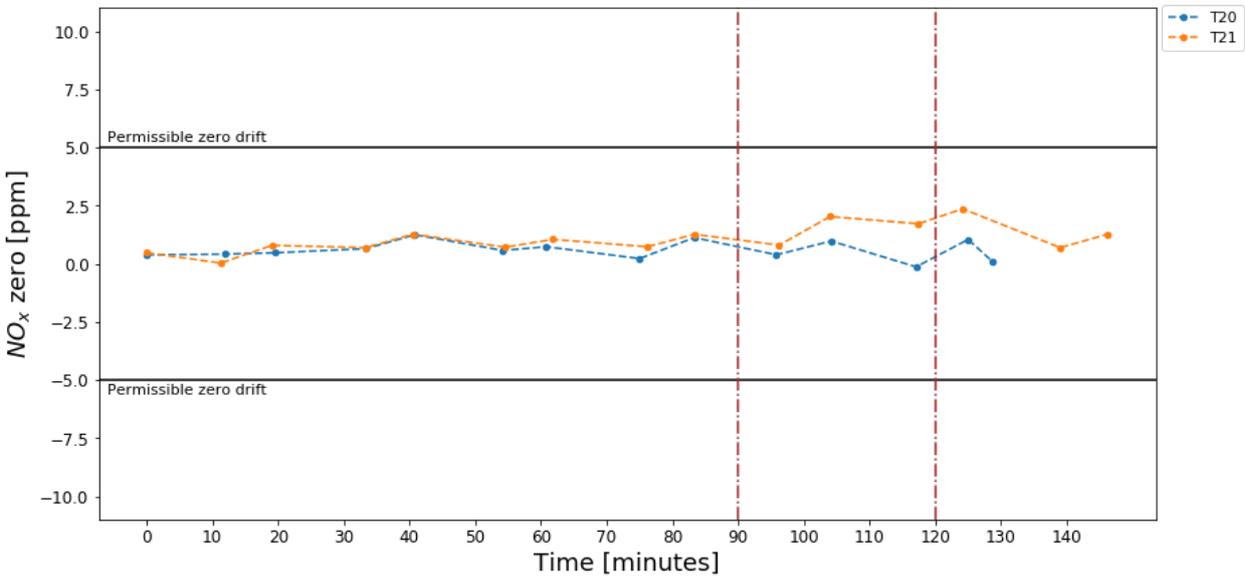


Source: JRC, 2020.

**3.2.4 Carbon dioxide CO<sub>2</sub>**


CO<sub>2</sub> zero drift is < 100 ppm on all tests and all zero intermediate checks, showing low variability among different tests. Although there is some slight variations of the zero response within a given test (from 0 ppm to 100 ppm), the zero drift is one order of magnitude lower than the permissible CO<sub>2</sub> zero drift (2000 ppm). Results are similar for tests done on RDE compliant routes (**Figure 18**) and on the high altitude tests (**Figure 19**).

**Figure 18.** CO<sub>2</sub> zero drift over RDE compliant routes

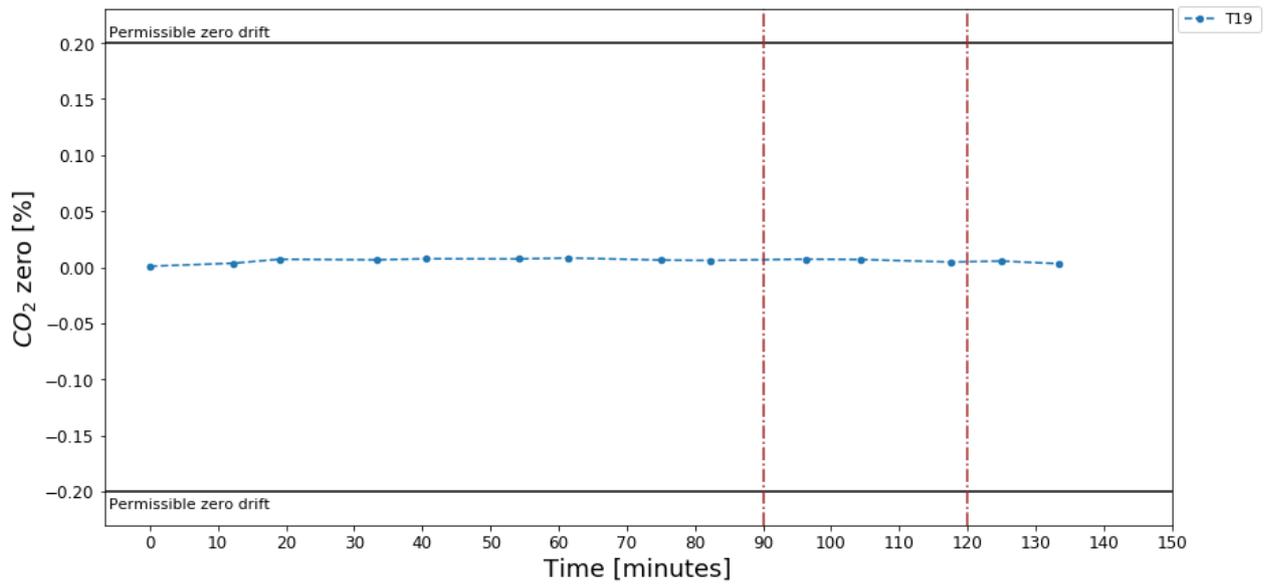

Source: JRC, 2020.

**Figure 19.** CO<sub>2</sub> zero drift over the high altitude route

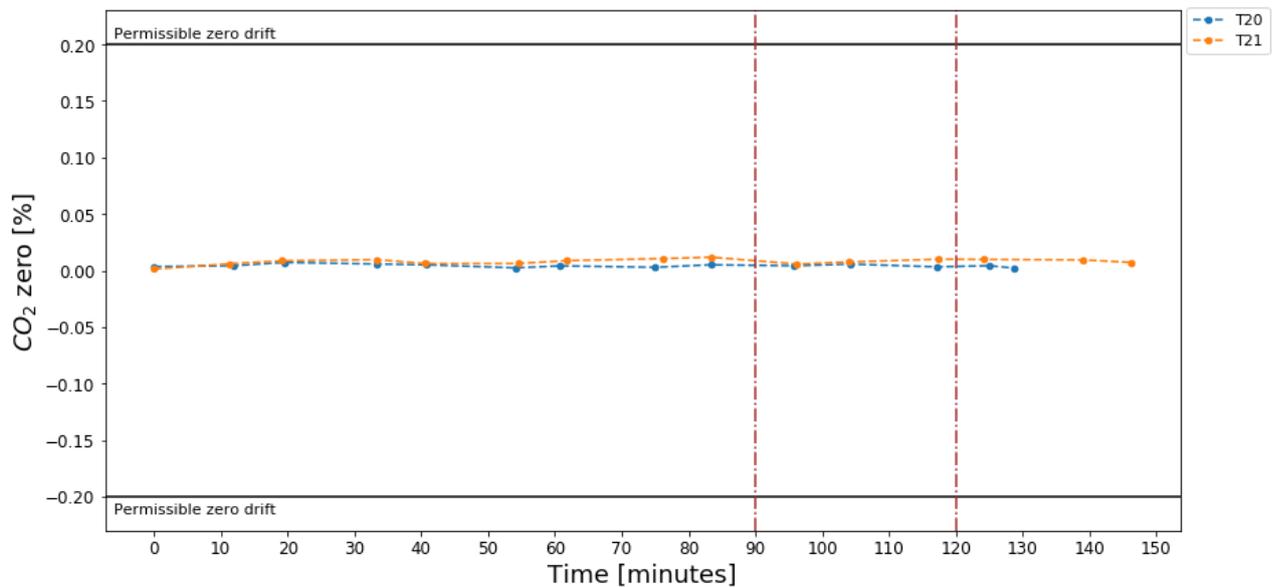


Source: JRC, 2020.

### 3.2.5 Carbon monoxide CO


The CO zero drift is always within its permissible range allowed by regulation ( $\pm 75$  ppm) in the three tests performed with the HORIBA OBS-ONE unit. The measured CO drift is mainly negative and reaches a minimum value of -20 ppm on the RDEc test (**Figure 20**) and -50 ppm on the HighAlt tests (**Figure 21**). No step or linear drift is systematically observed in the tests performed. All intermediate zero checks are also within the permissible drift limit.

**Figure 20.** CO zero drift over RDE compliant routes

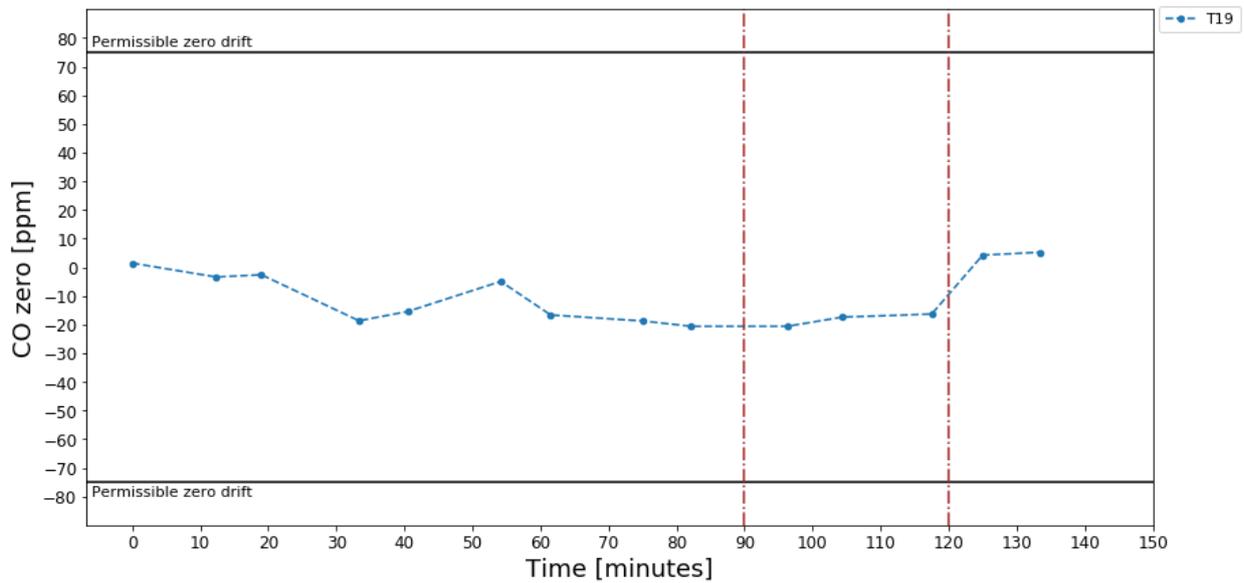

Source: JRC, 2020.

**Figure 21.** CO zero drift over the high altitude routes

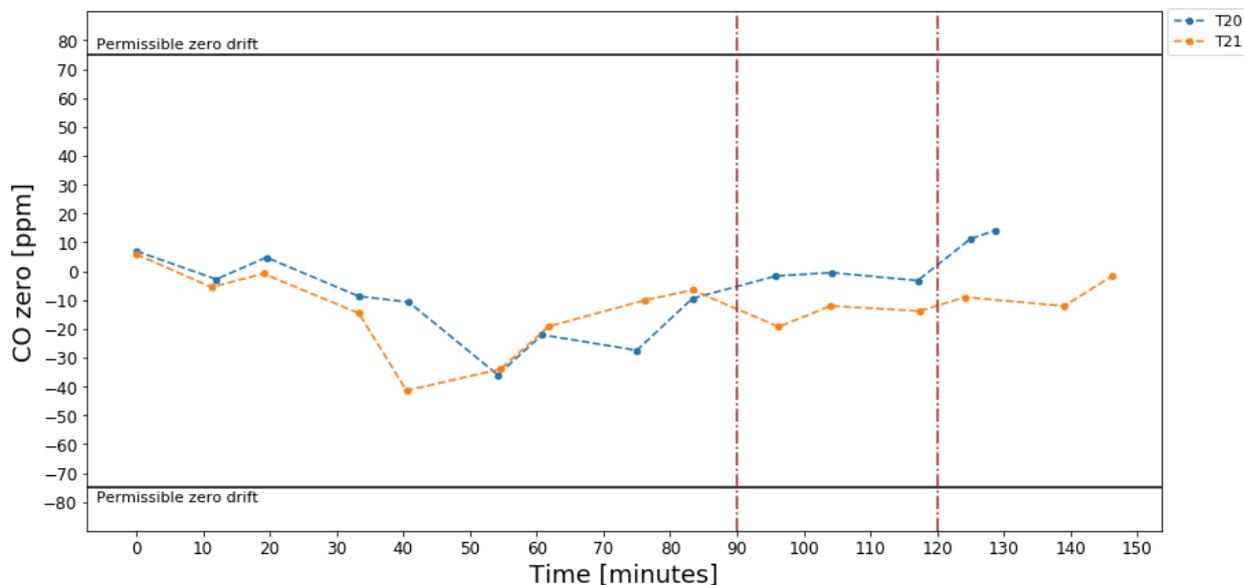

Source: JRC, 2020.


### 3.3 AIP-PEMS (Gen 2)

The zero response checks reported in this section were calculated as the average values of zeroing time as the PEMS does not automatically report those values. The zero drift of all analysers were within the permissible tolerances in all intermediate checks as well as in the post-test.

#### 3.3.1 Nitrogen monoxide NO


The AIP-PEMS shows no drift for NO on RDEc routes (**Figure 22**) and a maximum of 1.5 ppm in the altitude section of the HighAlt test in one out of two tests performed (**Figure 23**). The two repetitions of each test are almost identical which proves a good reliability of the analyser.

**Figure 22.** NO zero drift over RDE compliant routes

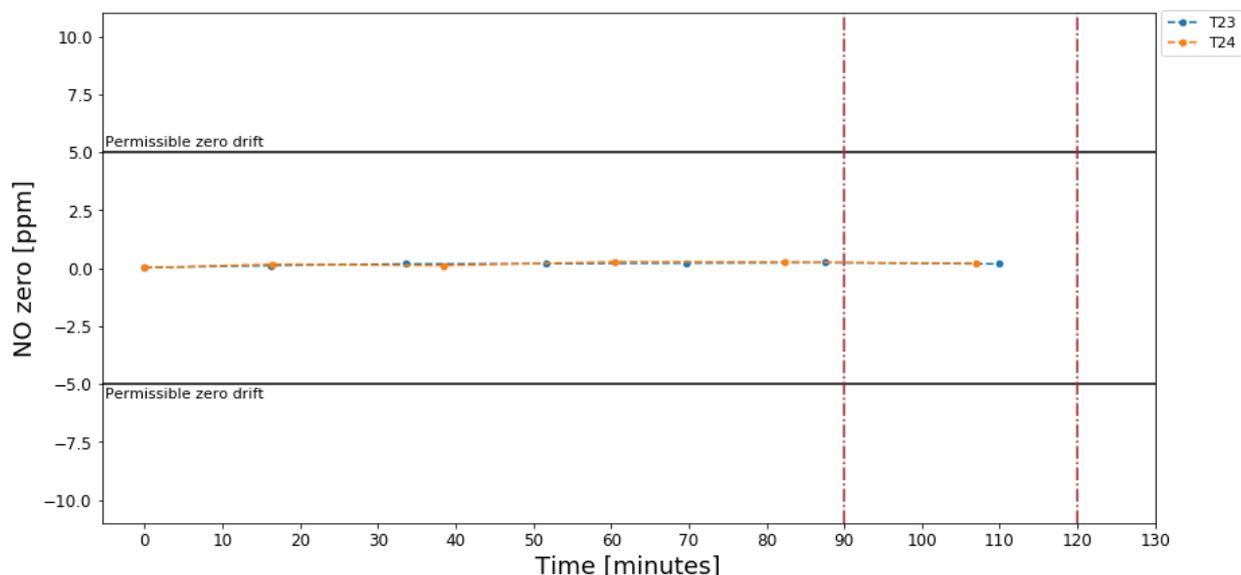

Source: JRC, 2020.

**Figure 23.** NO zero drift over the high altitude routes

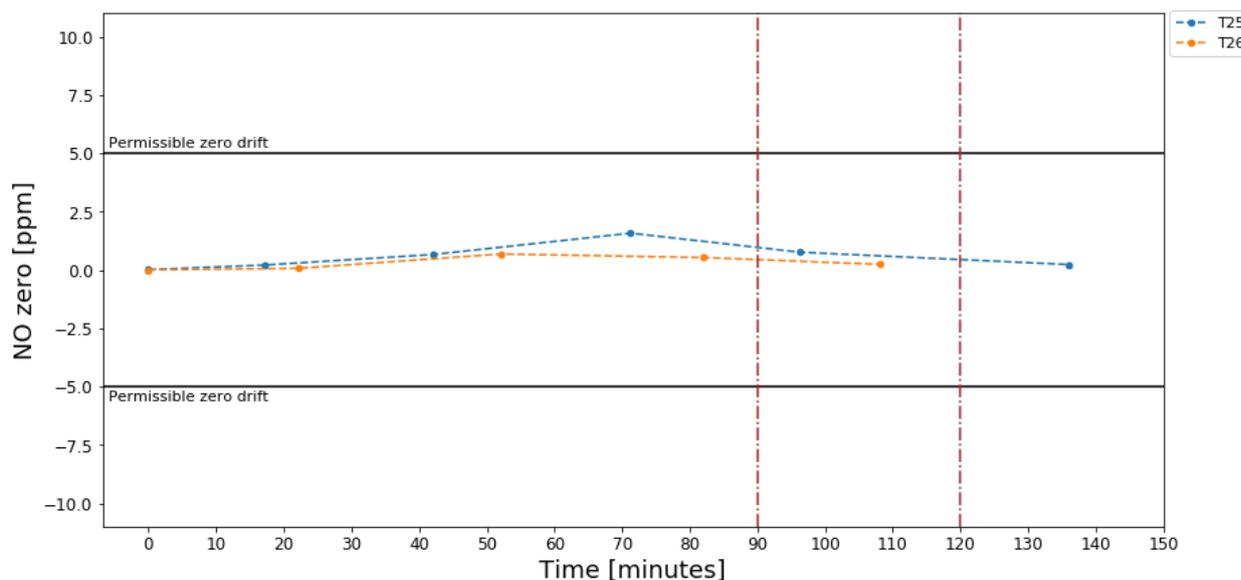


Source: JRC, 2020.

### 3.3.2 Nitrogen dioxide NO<sub>2</sub>


The AIP-PEMS has no zero drift for NO<sub>2</sub> showing consistently a value lower than 0.2 ppm on all intermediate checks on tests in RDEc routes (**Figure 24**) and HighAlt routes (**Figure 25**). Despite the harsh ambient conditions in which the HighAlt tests were performed (heavy rain, ~ 7 °C ambient temperature, and altitude reaching 1100 m), the analyser of NO<sub>2</sub> (Photoacoustic Spectroscopy) shows no sign of drift.

**Figure 24.** NO<sub>2</sub> zero drift over RDE compliant routes

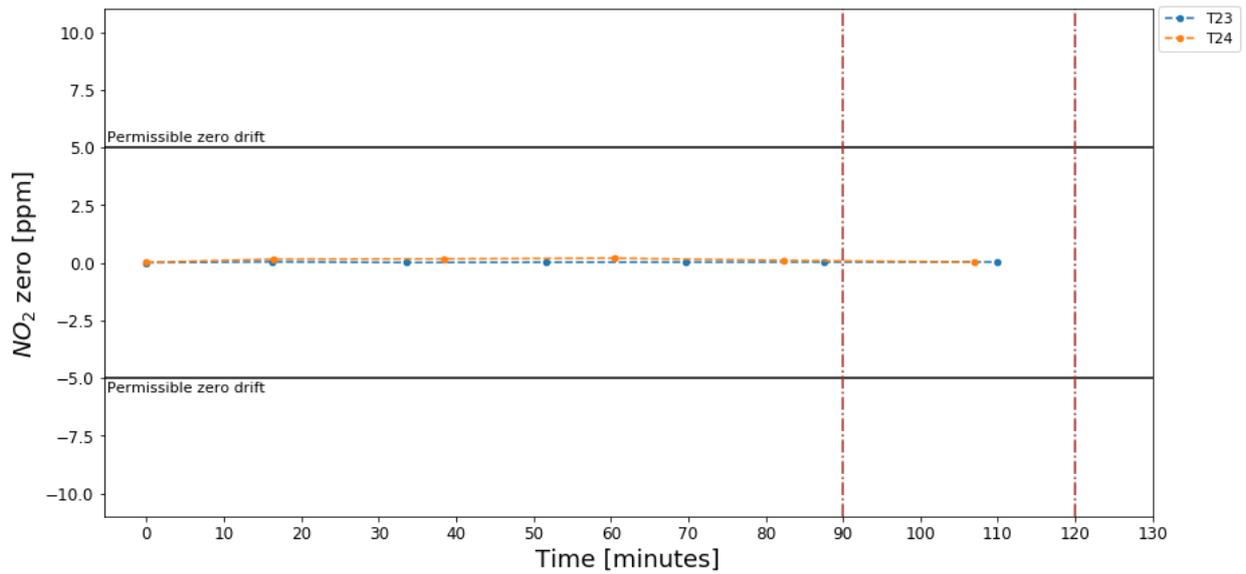

Source: JRC, 2020.

**Figure 25.** NO<sub>2</sub> zero drift over the high altitude routes

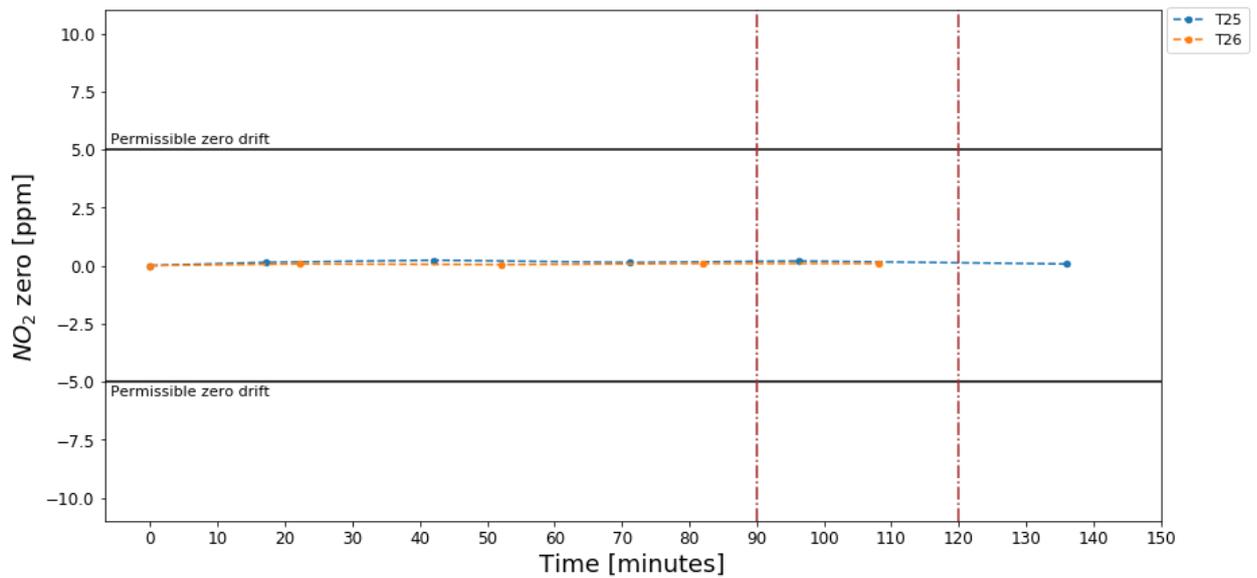


Source: JRC, 2020.

### 3.3.3 Nitrogen oxides NO<sub>x</sub>


In the AIP-PEMS, the NO analyser is the main responsible of the observed NO<sub>x</sub> zero drift as the NO<sub>2</sub> analyser reading is systematically close to 0 (max 0.2 ppm). In all testing conditions (**Figure 26**, **Figure 27**), the intermediate NO<sub>x</sub> response checks are lower than 2 ppm. No worst case NO<sub>x</sub> step drift is observed for this instrument.

**Figure 26.** NO<sub>x</sub> zero drift over RDE compliant routes

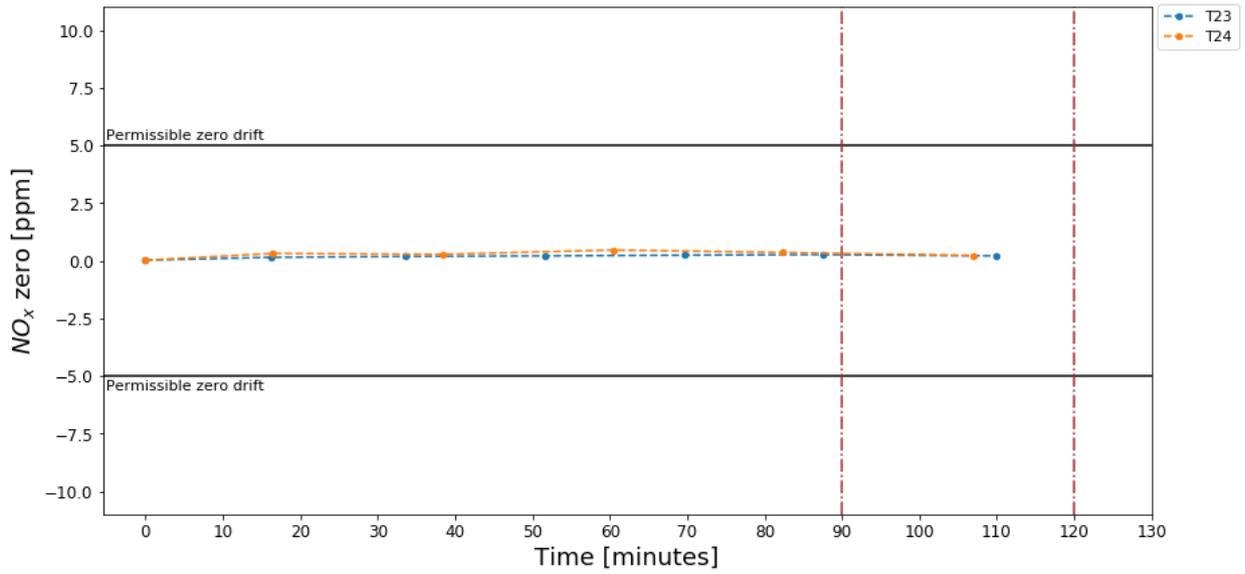

Source: JRC, 2020.

**Figure 27.** NO<sub>x</sub> zero drift over the high altitude routes

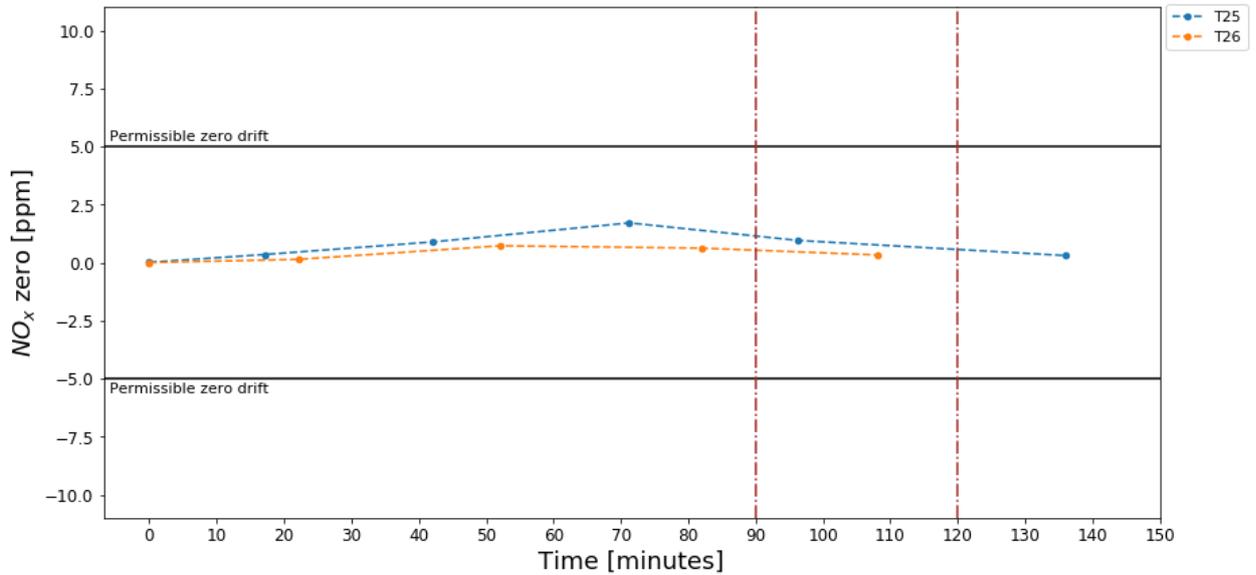


Source: JRC, 2020.

### 3.3.4 Carbon dioxide CO<sub>2</sub>


The CO<sub>2</sub> analyser of the AIP-PEMS is not affected by zero drift on any of the zero response checks performed or on the RDEc routes (**Figure 28**) or in the HighAlt ones (**Figure 29**). As for other instruments, the maximum zero drift measured is 100 ppm, which is one order of magnitude lower than the permissible zero drift for CO<sub>2</sub>.

**Figure 28.** CO<sub>2</sub> zero drift over RDE compliant routes

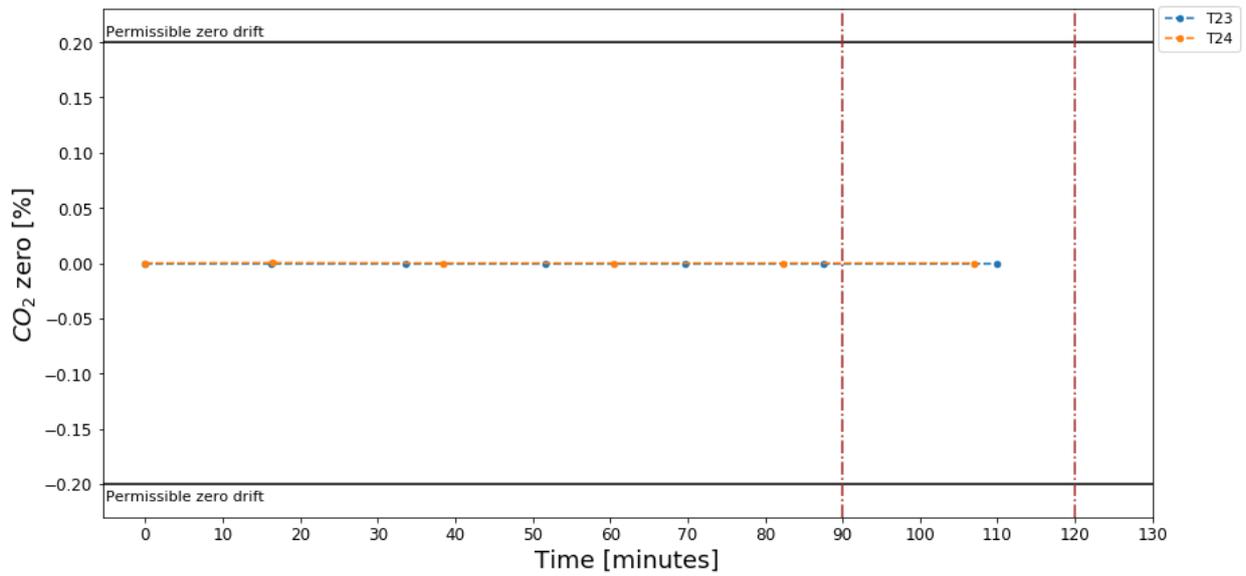

Source: JRC, 2020.

**Figure 29.** CO<sub>2</sub> zero drift over the high altitude routes

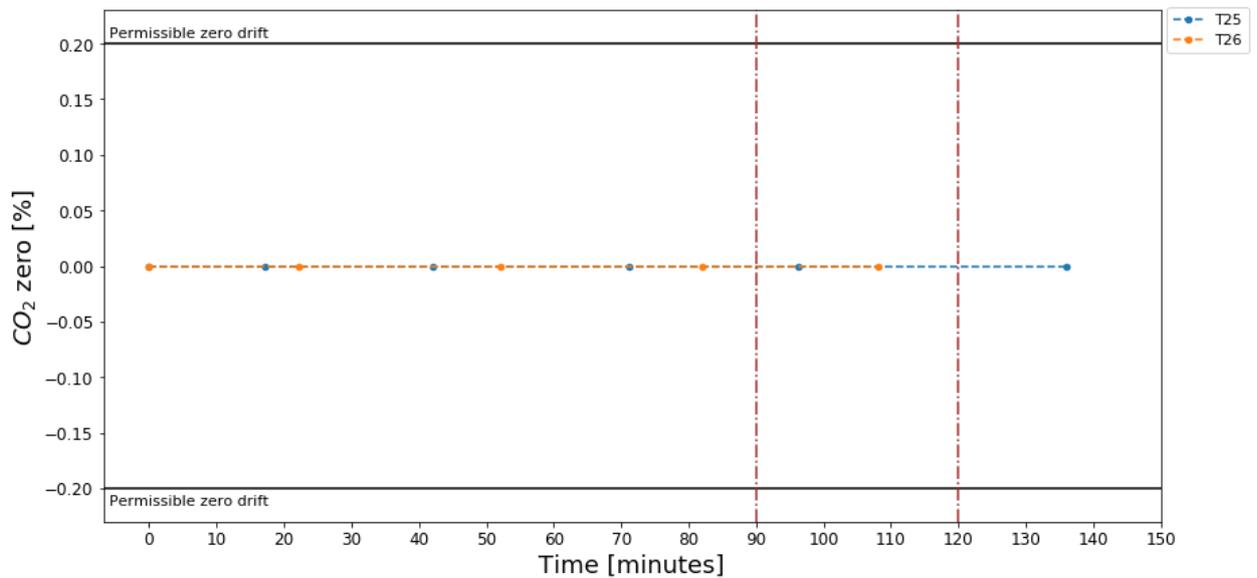


Source: JRC, 2020.

### 3.3.5 Carbon monoxide CO


All four tests performed with the AIP-PEMS show essentially no zero drift for CO (**Figure 30**). All registered intermediate zero drift values are negative or null and the minimum intermediate response drift is -2 ppm. The analyser does not show any particular response to the altitude tests (**Figure 31**).

**Figure 30.** CO zero drift over RDE compliant routes

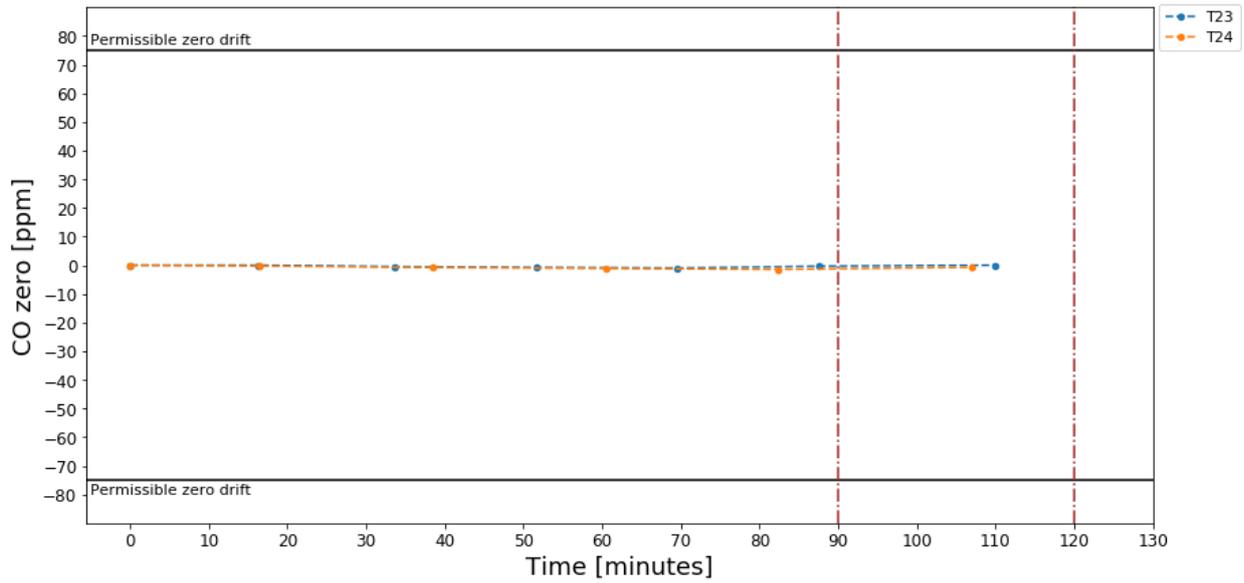

Source: JRC, 2020.

**Figure 31.** CO zero drift over the high altitude routes

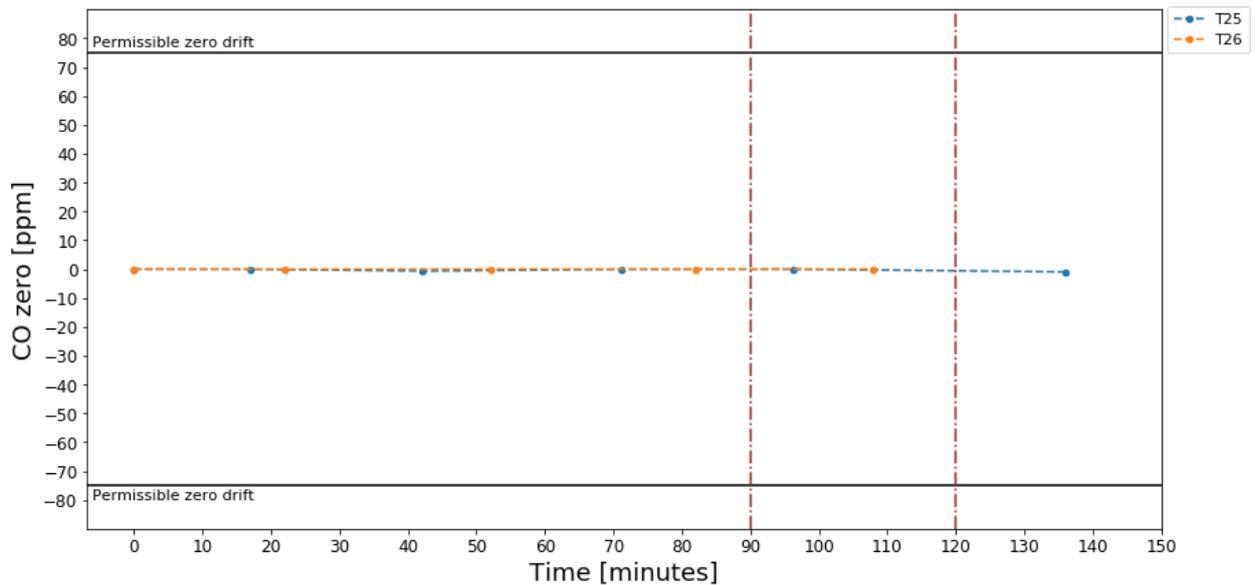

Source: JRC, 2020.

### 3.4 SENSORS SEMTECH LDV

Two sets of tests were performed with the SENSORS SEMTECH LDV. Tests T27 and T29, were done with the pre-test performed inside the JRC facility, where the instrument had soaked at an ambient temperature of 20 °C. The vehicle, with the PEMS installed on the trailer hook was then driven for the tests at an ambient temperature of ~0 °C. Despite the zero drift for NO, and NO<sub>2</sub> between the pre-test and the post-test on both tests were lower than 5 ppm individually for each analyser, the combination of both led to an exceedance of the permissible NO<sub>x</sub> zero drift. For that reason, and following the PEMS manufacturer requirement, a new set of tests was performed (T28 and T30) on the following day, where the instrument was soaked at an ambient temperature similar to the testing temperature (~ 0 °C) and the pre-test was also performed at that


temperature. For the tests performed in these conditions, the NO, NO<sub>2</sub>, and also NO<sub>x</sub> zero drifts were within permissible tolerances at the end of the test.

The zero response checks reported in this section were calculated as the average values of zeroing time as the PEMS does not automatically report those values. The CO analyser of the instrument was not operating at the time of the tests.

### 3.4.1 Nitrogen monoxide NO


NO zero drift is lower than  $\pm 2$  ppm on the tests where the pre-test was performed at external ambient temperature (T28, **Figure 32**, T30 **Figure 33**) on all intermediate zero checks, on the RDE compliant test and in the altitude test. For the tests where the pre-test was performed inside the facility, the NO analyser tended to drift linearly towards -5 ppm, almost reaching this value at the end of the two hours' drive.

**Figure 32.** NO zero drift over RDE compliant routes

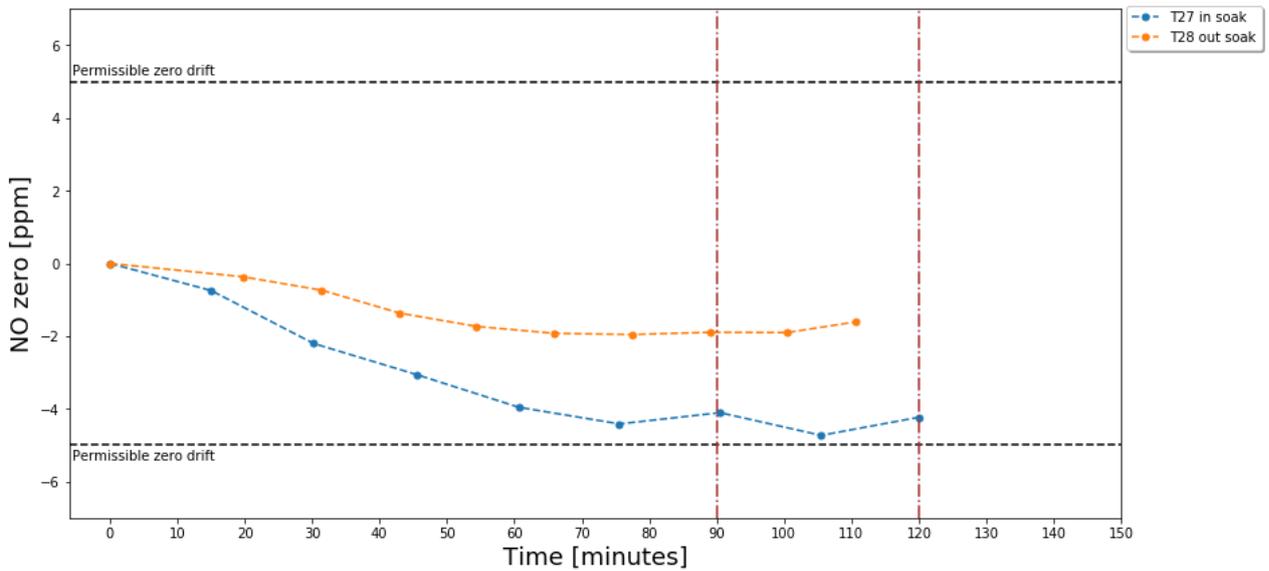

Source: JRC, 2020.

**Figure 33.** NO zero drift over the high altitude route

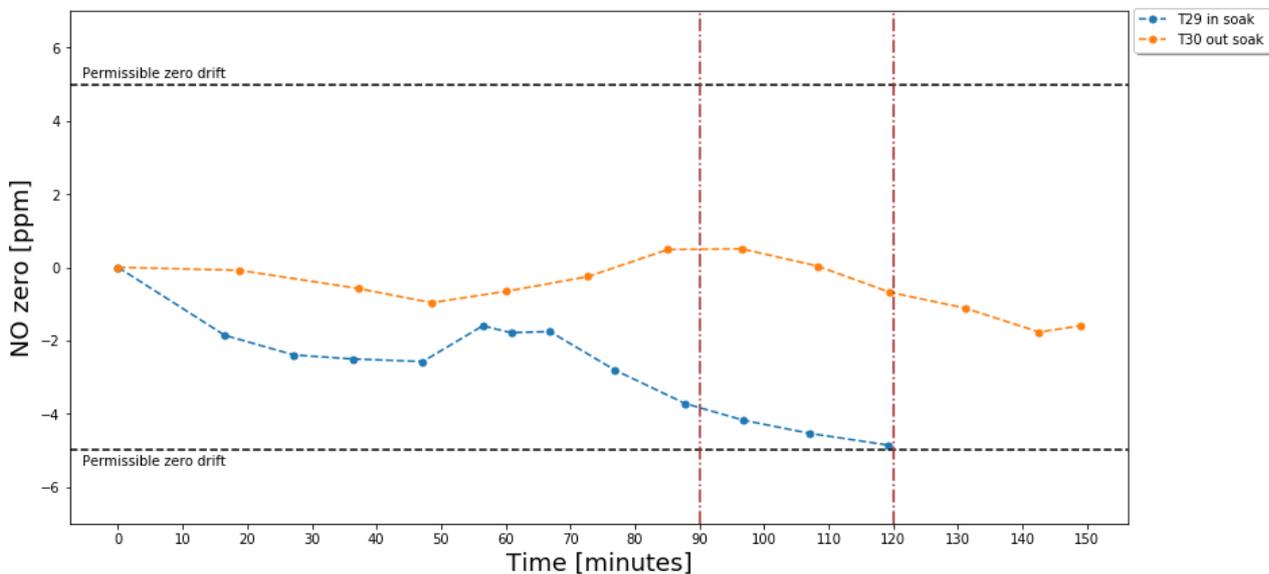


Source: JRC, 2020.

### 3.4.2 Nitrogen dioxide NO<sub>2</sub>


The intermediate NO<sub>2</sub> zero checks were within the permissible drift for all tests in all conditions (max drift - 3.5 ppm). The NO<sub>2</sub> zero tend to drift to negative values, particularly on tests done with soak at very different ambient temperature than test temperature, both on the RDE compliant route (**Figure 34**) and on high altitude (**Figure 35**).

**Figure 34.** NO<sub>2</sub> zero drift over RDE compliant routes

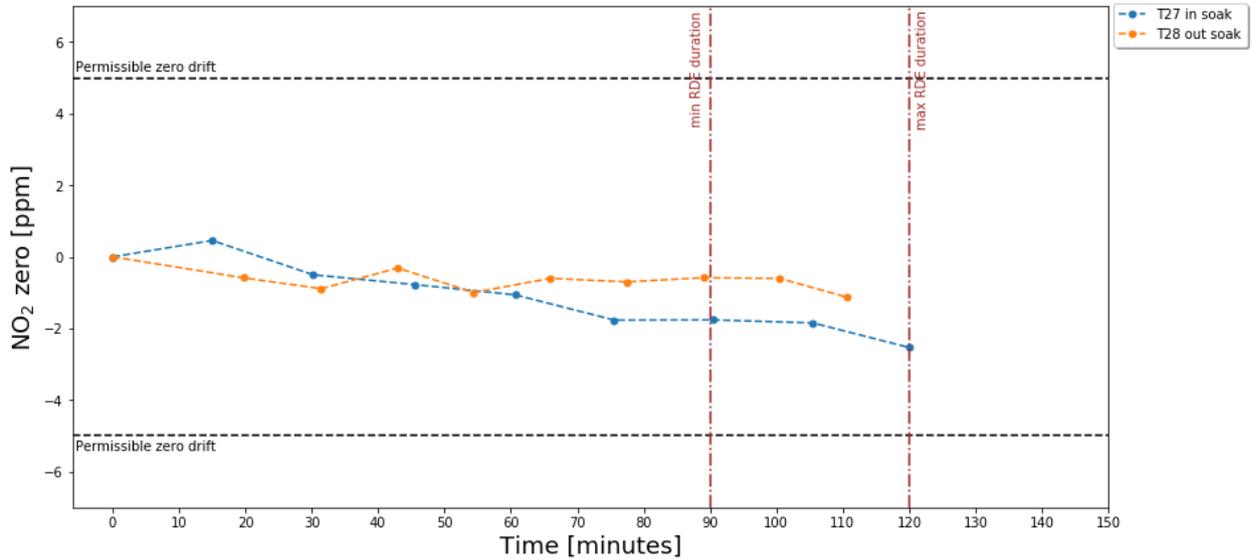

Source: JRC, 2020.

**Figure 35.** NO<sub>2</sub> zero drift over the high altitude route

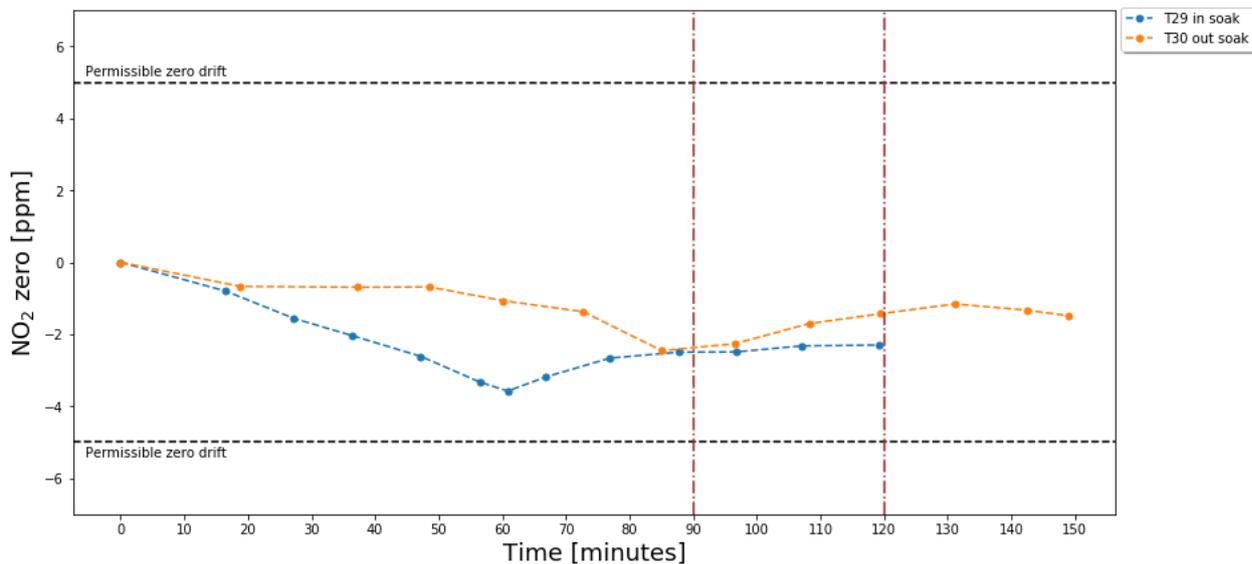


Source: JRC, 2020.

### 3.4.3 Nitrogen oxides NO<sub>x</sub>

When combined, the NO<sub>x</sub> zero drift of all four tests done with the SENSORS PEMS are negative (**Figure 36**, **Figure 37**). The NO<sub>x</sub> zero exceeds the permissible 5 ppm on the tests done with soak and calibration done inside the facility, whereas the tests with similar ambient conditions have a final zero drift within the tolerance. No effect of altitude is seen on intermediate zero checks. Also, T28 and T30 show that under cold


conditions of the test, if the instrument is soaked and calibrated following the requirements of the PEMS manufacturer, no particular effect of ambient temperature is observed on NO<sub>x</sub> zero drift. No step drift was verified on any of the tests even when the instrument was exposed to a drastic change in the temperature operation condition.

**Figure 36.** NO<sub>x</sub> zero drift over RDE compliant routes

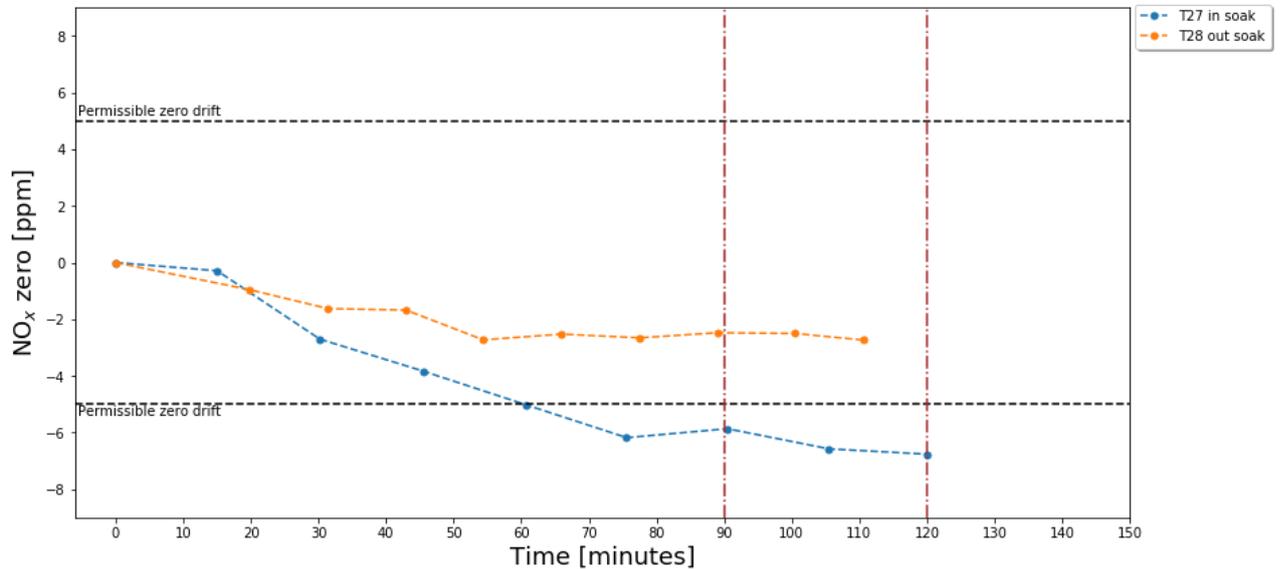

Source: JRC, 2020.

**Figure 37.** NO<sub>x</sub> zero drift over the high altitude route

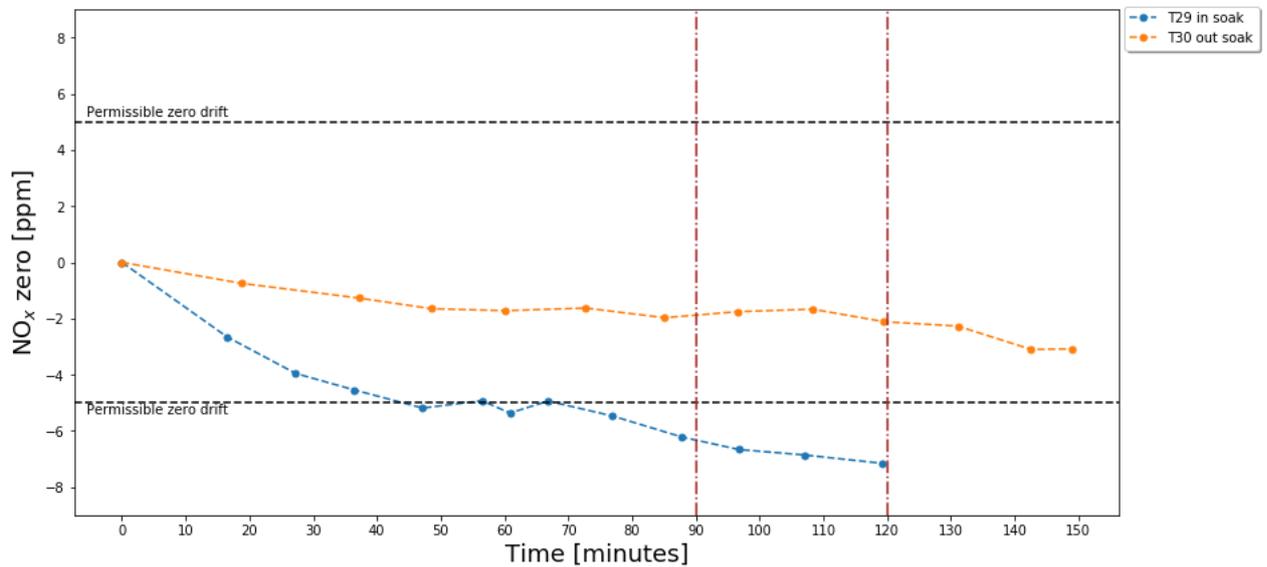


Source: JRC, 2020.

### 3.4.4 Carbon dioxide CO<sub>2</sub>


The zero drift of the CO<sub>2</sub> analyser of the SENSORS SEMTECH LDV is within the permissible tolerance on all intermediate zero checks performed on all tests, including the RDE compliant routes (**Figure 38**) and the high altitude tests (**Figure 39**). No effect of altitude or change of temperature is observed on the zero response of the CO<sub>2</sub> analyser.

**Figure 38.** CO<sub>2</sub> zero drift over RDE compliant routes

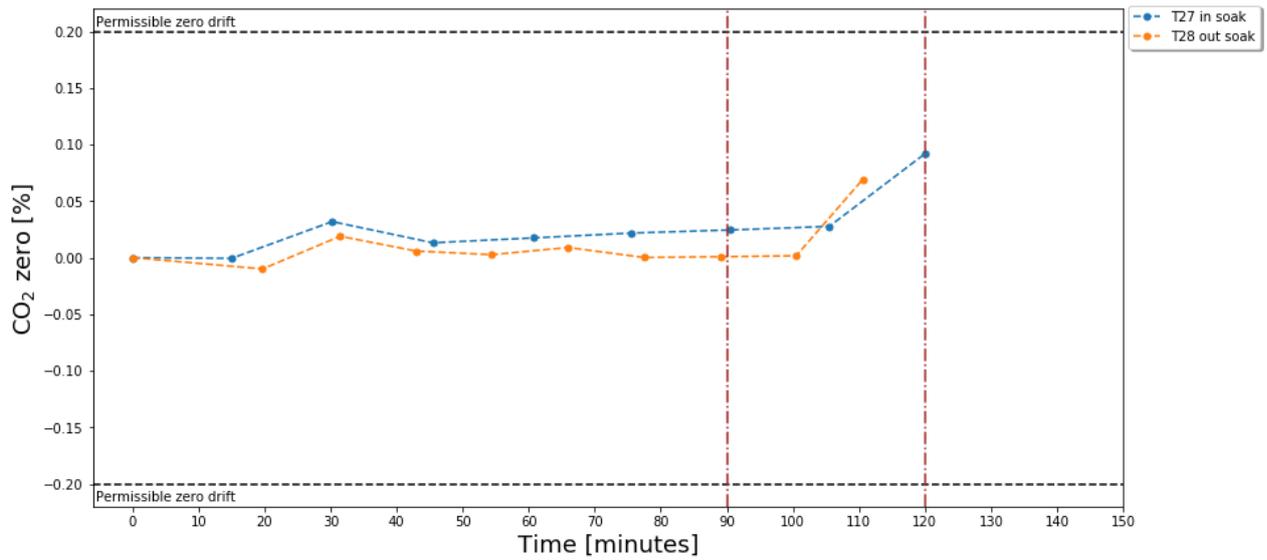

Source: JRC, 2020.

**Figure 39.** CO<sub>2</sub> zero drift over the high altitude route

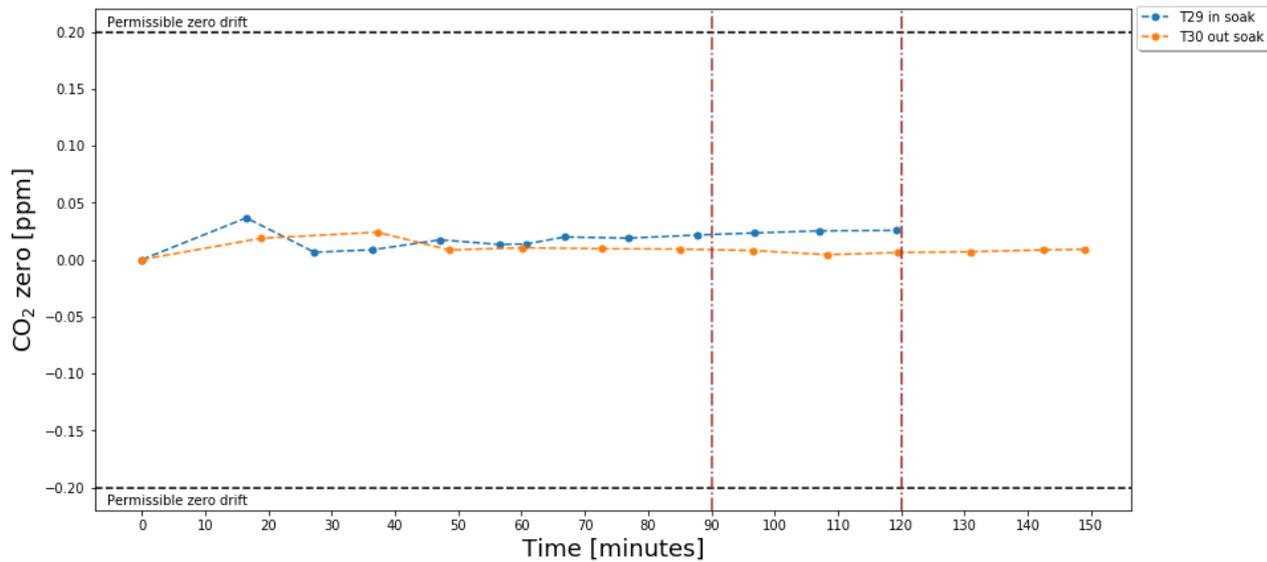

Source: JRC, 2020.


### 3.5 Static tests

#### 3.5.1 Constant ambient conditions

This section provides an overview of the results for the three tests done with the PEMS performing zero checks at an interval of 10/15 minutes on a static vehicle for 2 hours at constant temperature (2 tests with AVL-MOVE, and 1 test with HORIBA OBS-ONE). All three tests fulfil the permissible zero drift limits for all measured gases (NO, NO<sub>2</sub>, CO<sub>2</sub>, CO) between the pre-test and their respective post-tests.

NO zero response checks lie within  $\pm 0.3$  ppm on all three tests. The one with the AVL-MOVE in which the vehicle was kept idling (engine-on) and the one with the HORIBA OBS-ONE show positive values for NO zero, whereas the one with the engine-off on the AVL-MOVE displays negative values (**Figure 40**).


**Figure 40.** NO zero drift checks for static tests

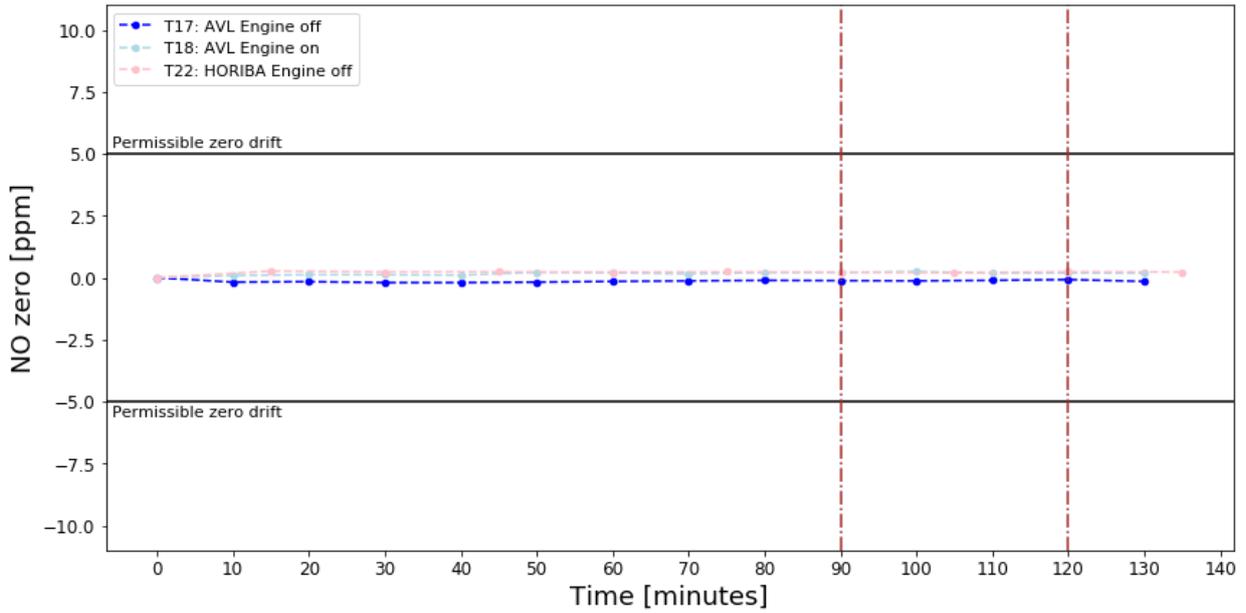

Source: JRC, 2020.

The NO<sub>2</sub> zero response checks performed on both PEMS oscillate around 0 ppm (max 0.1 ppm and min -0.6 ppm, **Figure 41**). No increase/decrease trend is observed for NO<sub>2</sub> zero drift along the testing time.


**Figure 41.** NO<sub>2</sub> zero drift checks for static tests

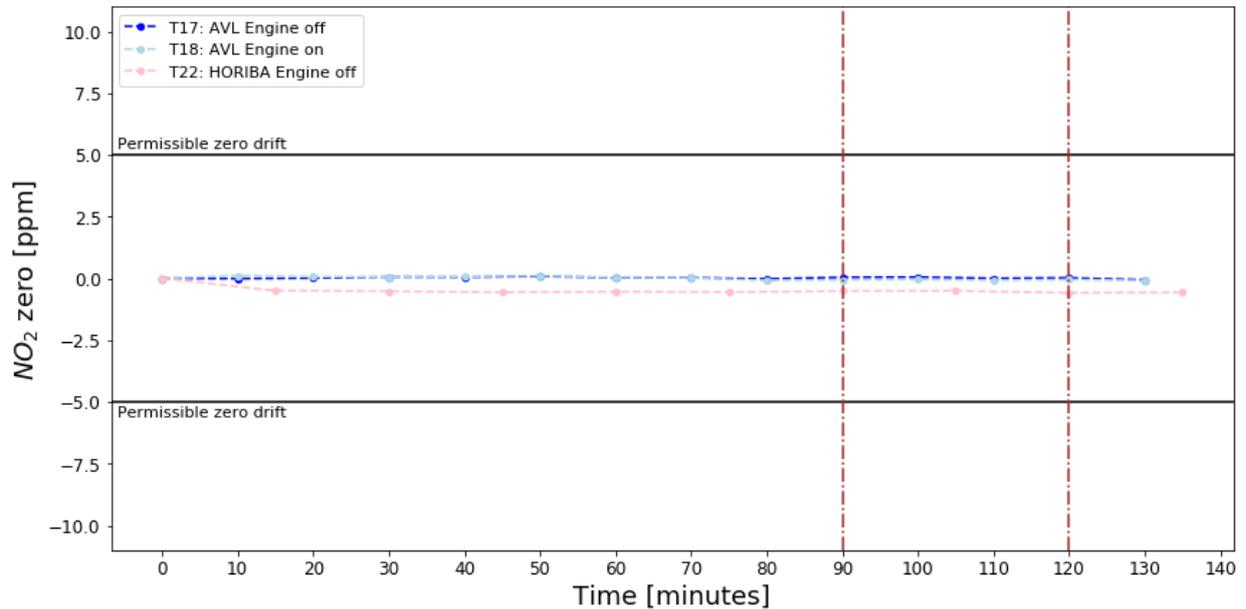

Source: JRC, 2020.

The same pattern described for NO applies for NO<sub>x</sub> zero drift with intermediate checks within ±0.3 ppm (**Figure 42**). In contrast with the tests done with the vehicle running, on the static tests, the zero drift for NO<sub>x</sub> is dominated by the NO component. The NO<sub>x</sub> drift is similar on both tests performed with the AVL-MOVE which points to the fact that engine on or engine off (i.e., exhaust gas flowing through the analysers) does not play a significant role in the zero drift.


**Figure 42.** NO<sub>x</sub> zero drift checks for static tests

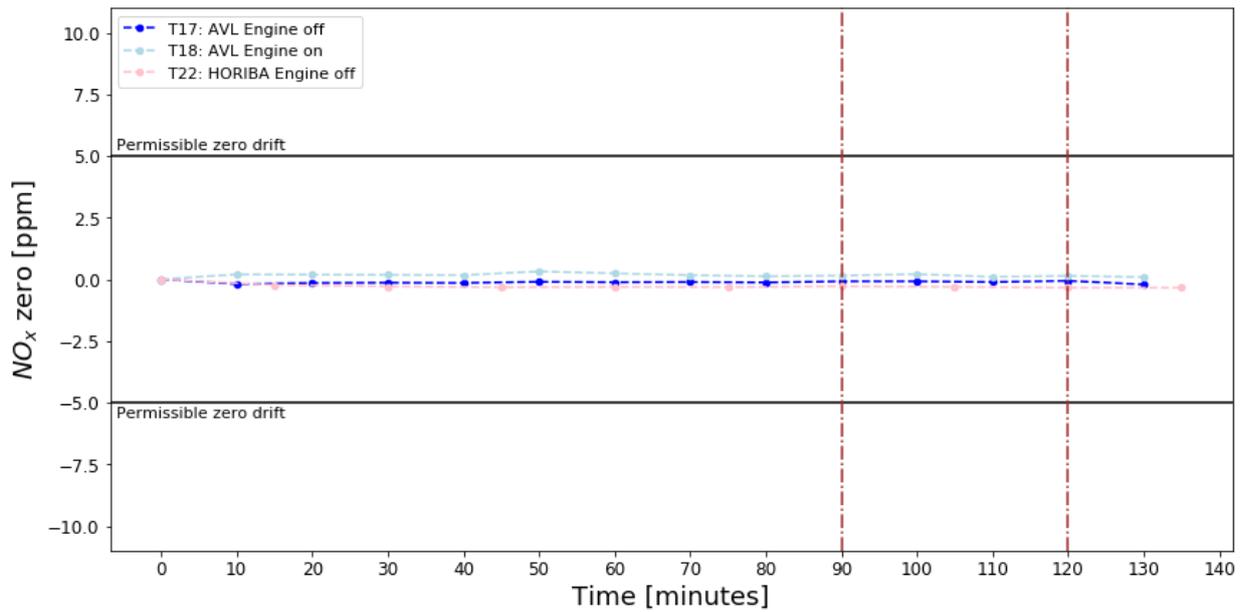

Source: JRC, 2020.

On both tests with the AVL-MOVE the CO<sub>2</sub> zero drift of all intermediate checks was below the detection limit and reported as 0 ppm by the instrument. On the test done with the HORIBA instrument, the CO<sub>2</sub> drifted linearly from 0 to -140 ppm (**Figure 43**). This zero drift is however, one order of magnitude lower than the permissible CO<sub>2</sub> zero drift.

**Figure 43.** CO<sub>2</sub> zero drift checks for static tests

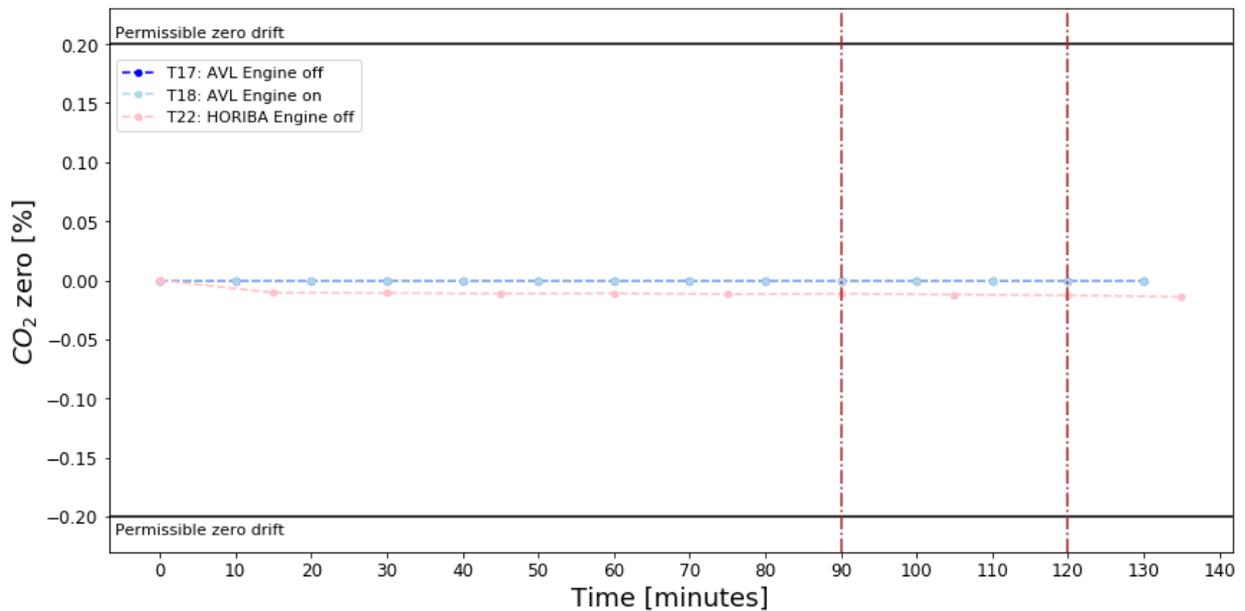


Source: JRC, 2020.

Finally, the zero drift behaviour for CO is similar for both tests performed with the AVL-MOVE with a positive step drift occurring just at the beginning of the test followed by a smooth positive linear drift until the test end reaching 31 ppm and 14 ppm for the engine-off and engine-on tests, respectively (**Figure 44**). In the case of the engine-off test the first step drift is 20 ppm whereas in the engine-on it is 10 ppm. The results of T01 are almost identical to the engine-on test, with a step of 10 ppm in the first zero check, and a maximum

drift of 14 ppm at test end. The test done with the HORIBA PEMS has a stable behaviour with intermediate zero values in the range of  $\pm 5$  ppm with up and down values.

**Figure 44.** CO zero drift checks for static tests

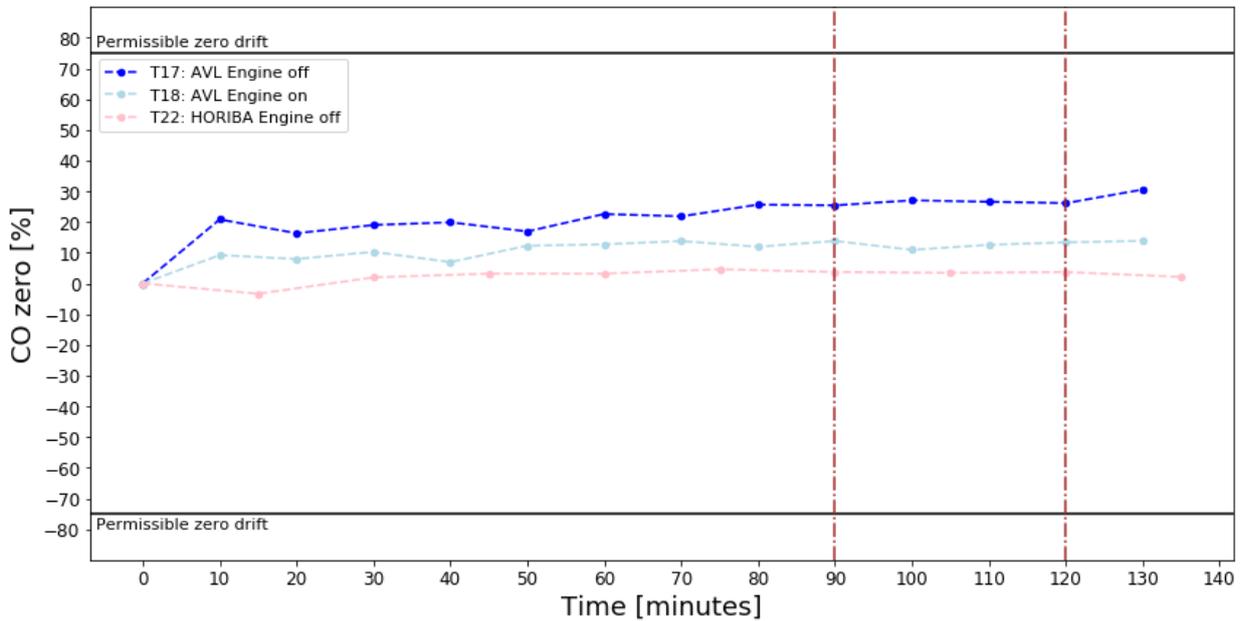

Source: JRC, 2020.


### 3.5.2 Gradual changes of temperature

This section presents the zero drift tests done in static conditions, when PEMS instruments were exposed to a i) a gradual change of ambient temperature from  $\sim 23$  °C to  $-7$  °C ii) a constant temperature of  $-7$  °C, and iii) a change of ambient temperature from  $-7$  °C to  $23$  °C. The focus is on NO, NO<sub>2</sub> and NO<sub>x</sub>.

#### 3.5.2.1 Temperature change from 23 °C to -7 °C


The pre-test was performed at an ambient temperature of  $\sim 23$  °C. Then the climatic chamber was set to change its temperature to reach  $-7$  °C. The temperature was reached after  $\sim 90$ -100 minutes. For the AVL and HORIBA instruments NO (Figure 45), NO<sub>2</sub> (Figure 46), and NO<sub>x</sub> (Figure 47) zero drift intermediate checks were within the permissible tolerances throughout the test, with maximum values  $< 3$  ppm. It is worth noting that on the HORIBA PEMS the drift of NO<sub>x</sub> is virtually zero as the NO and NO<sub>2</sub> readings had opposite trends. In the case of the SENSORS PEMS, both NO and NO<sub>2</sub> analysers tended to drift toward negative values, reaching  $\sim -3$  ppm each after 90 minutes, resulting in an exceedance of the zero drift tolerance for NO<sub>x</sub> at the end of the test (which would invalidate the test).

**Figure 45.** NO zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from 23 °C to -7 °C

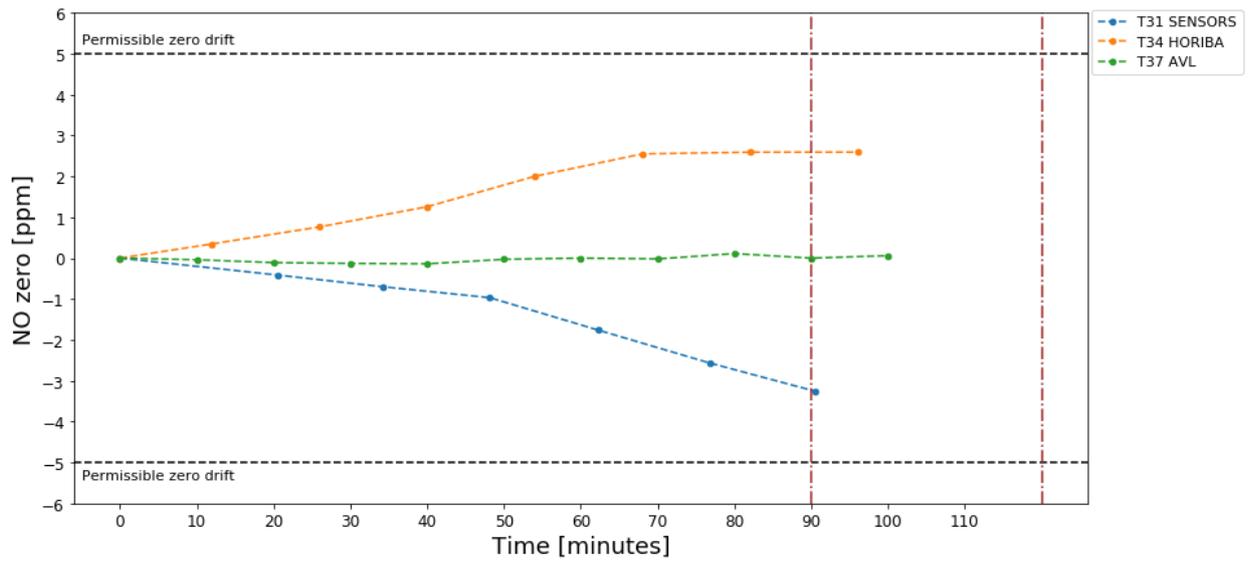


Source: JRC, 2020.

**Figure 46.** NO<sub>2</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from 23 °C to -7 °C

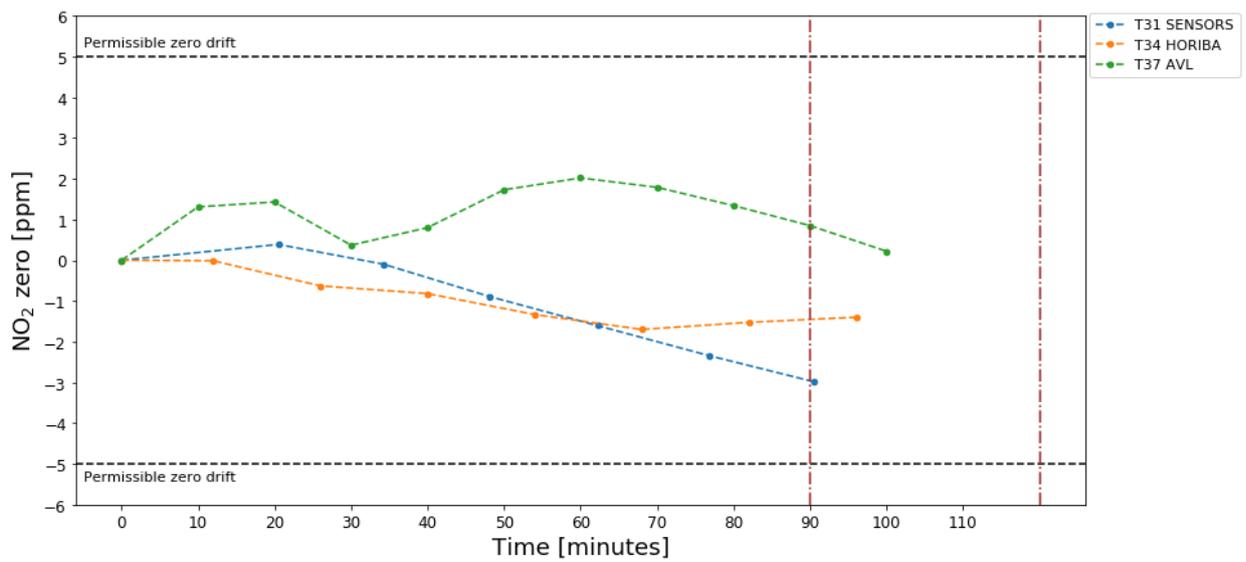

Source: JRC, 2020.

**Figure 47.** NO<sub>x</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from 23 °C to -7 °C

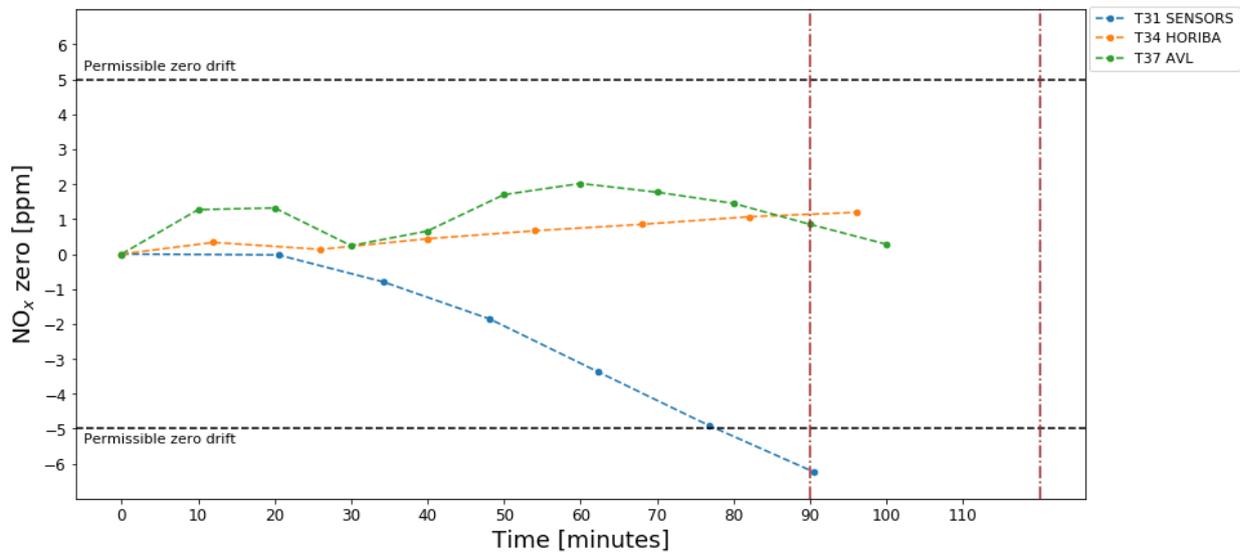


Source: JRC, 2020.

### 3.5.2.2 Constant -7 °C temperature


This test was performed immediately after the one described in the previous section. The instrument was calibrated at -7 °C and the zero checks were performed every 10 minutes for over an hour. In these conditions, the two tested instruments (HORIBA and SENSORS), showed no drift either for NO (**Figure 48**), NO<sub>2</sub> (**Figure 49**), or NO<sub>x</sub> (**Figure 50**). The maximum intermediate zero drift was less than 1 ppm, which proves that the low ambient temperature does not have an influence on the zero drift when the pre-test is performed at similar temperature than the test temperature.

**Figure 48.** NO zero drift checks for static tests in a climatic chamber where ambient temperature was kept constant at -7 °C

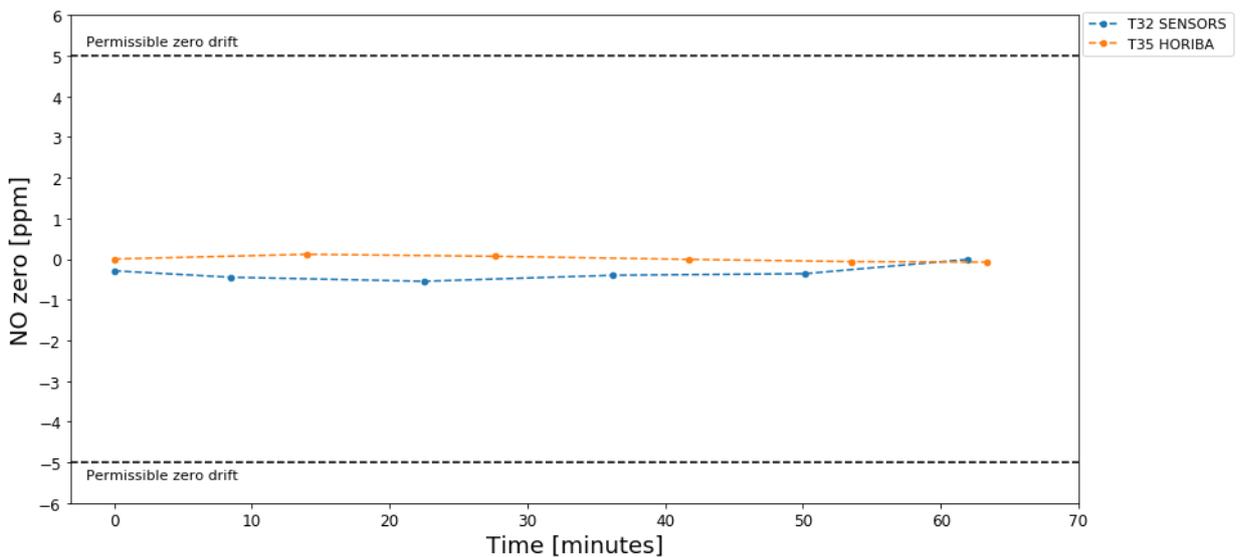


Source: JRC, 2020.

**Figure 49.** NO<sub>2</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was kept constant at -7 °C

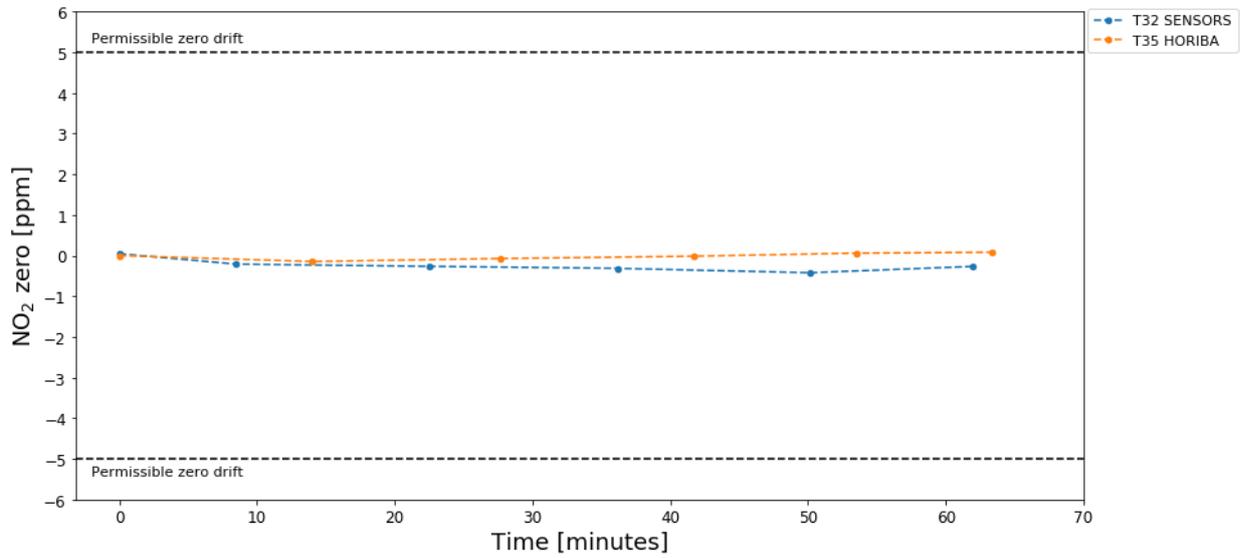

Source: JRC, 2020.

**Figure 50.** NO<sub>x</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was kept constant at -7 °C

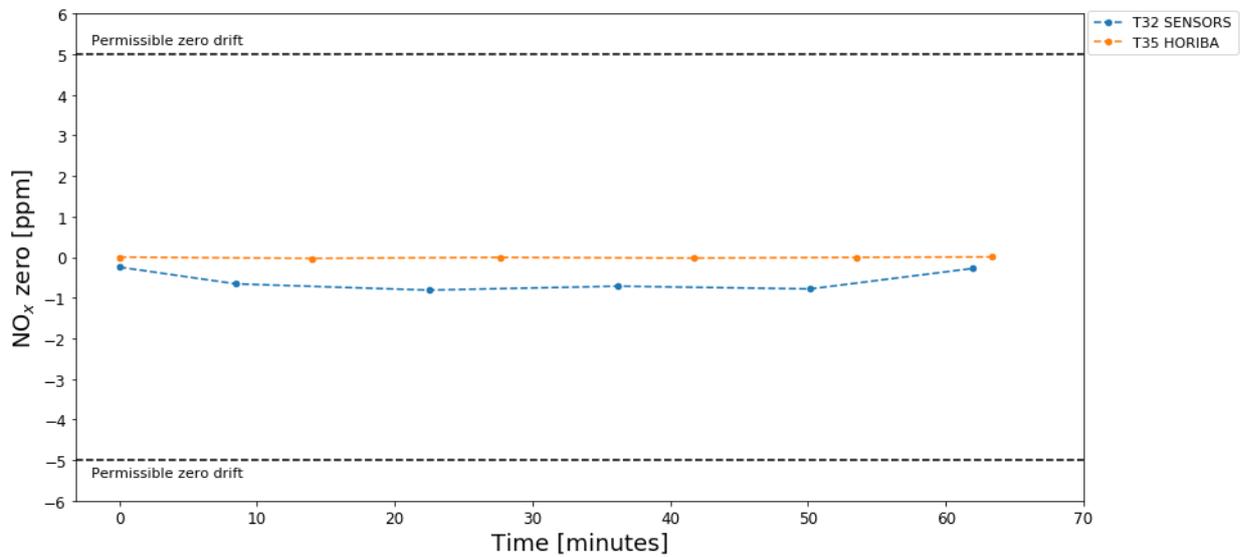


Source: JRC, 2020.

### 3.5.2.3 Temperature change from -7 °C to 23 °C


The ramp-up of the ambient temperature in the climatic chamber was performed quicker than the ramp-down from 23 °C to -7 °C. Despite this fact, the zero drift of NO (Figure 51), NO<sub>2</sub> (Figure 52), and NO<sub>x</sub> (Figure 53) remained well within the permissible tolerances with less than 3 ppm. No specific trend is observed for the set of PEMS tested with slight linear positive drift of the SENSOR, for both NO and NO<sub>2</sub> and some up and down oscillations around 0 ppm for the AVL and HORIBA instruments.

**Figure 51.** NO zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from -7 °C to 23 °C

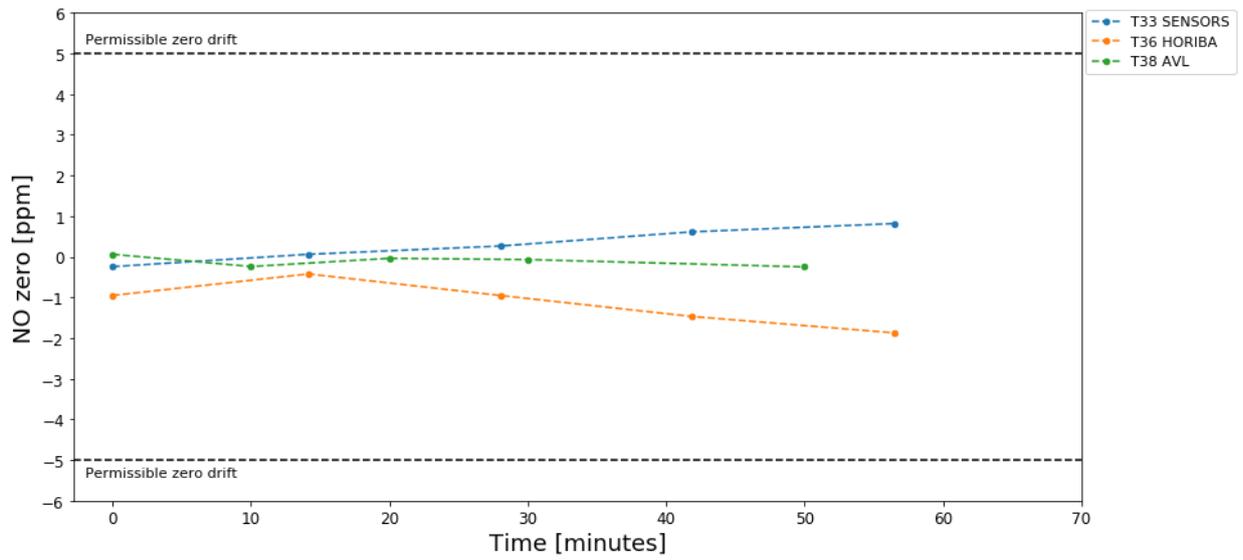


Source: JRC, 2020.

**Figure 52.** NO<sub>2</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from -7 °C to 23 °C

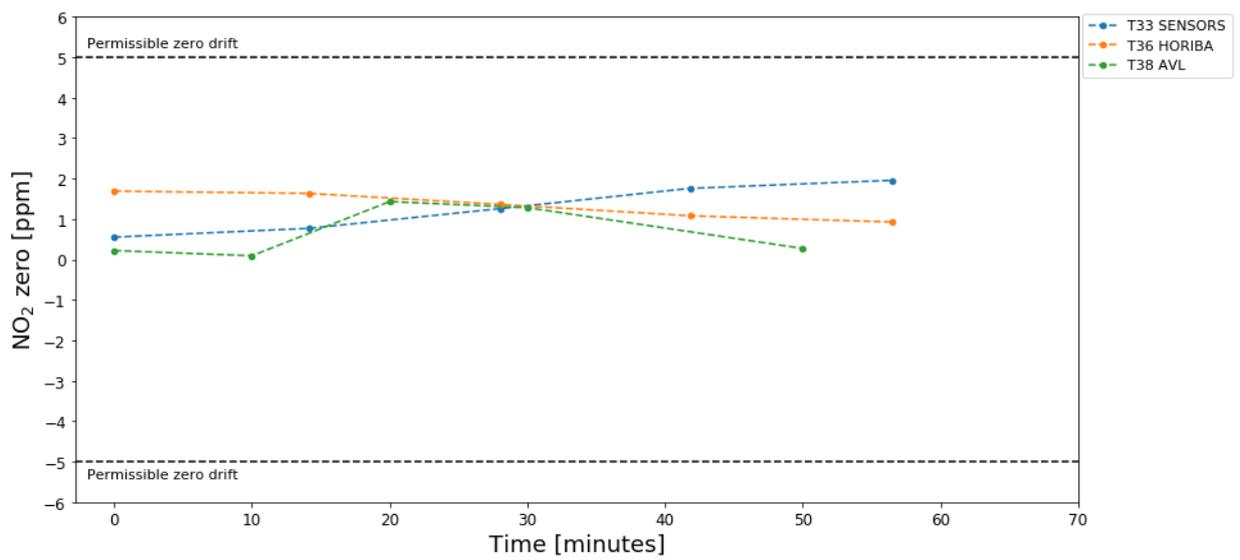

Source: JRC, 2020.

**Figure 53.** NO<sub>x</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from -7 °C to 23 °C

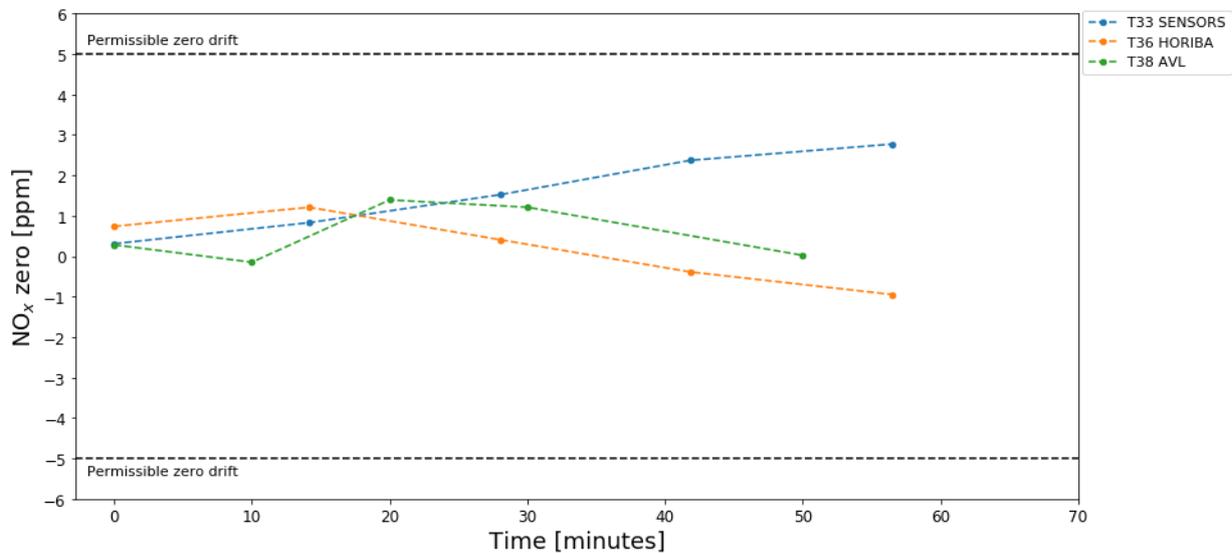

Source: JRC, 2020.


### 3.5.3 Drastic temperature changes

#### 3.5.3.1 Test with AVL-MOVE

The results of the test with the AVL-MOVE are shown in **Figure 54** for NO, **Figure 55** for NO<sub>2</sub>, **Figure 56** for NO<sub>x</sub>, **Figure 57** for CO<sub>2</sub> and **Figure 58** for CO, respectively. All figures in this section display the ambient temperature as measured by the weather station of the PEMS. Although the test cell ambient temperature was set to -7 °C, the weather station of the PEMS took circa 100 minutes to get its reading stabilised (and it reached -5 °C). The pink stars in the plots represent the pre-test and post-test zero reading for each pollutant. The squares show the reading of the intermediate zero response checks. The vertical brown rectangle immediately after the pre-test shows the time at which the engine of the vehicle was switched on to move it inside the climatic chamber. Finally, the coloured line represents the reading of the PEMS which shall correspond to the exhaust during and shortly after the engine-on time, and ambient air in the climatic chamber along the duration of the test.

The NO zero drift during the whole test is one order of magnitude lower than the permissible zero drift and it oscillates around  $\pm 0.1$  ppm (**Figure 54**). Immediately after the pre-test done with N<sub>2</sub> gas, the reading of ambient air is -0.15 ppm, whereas in the climatic chamber, the reading is stable at 0.1 ppm. No particular change in reading is observed after the drastic change of temperature.


**Figure 54.** NO zero drift checks for static tests with drastic change of temperature – AVL-MOVE

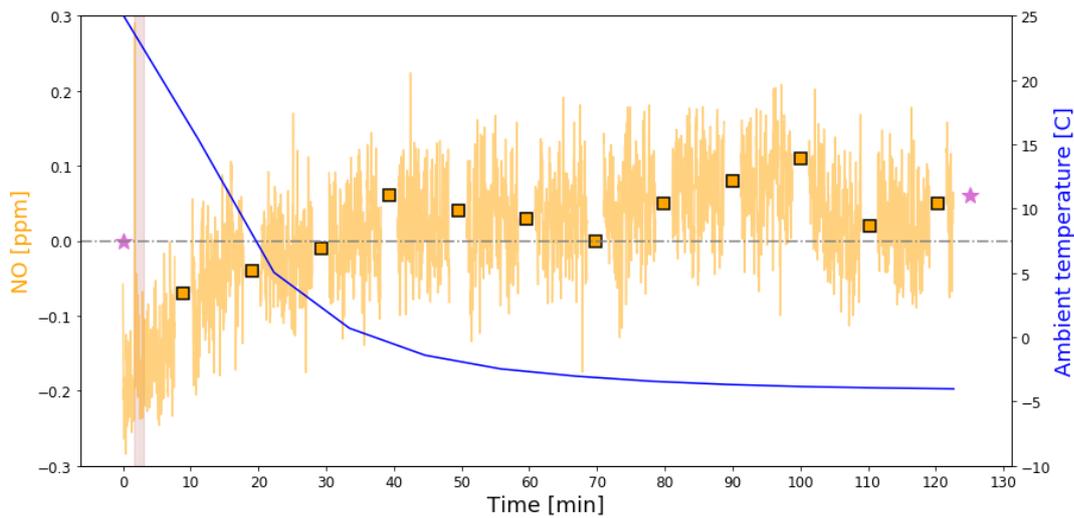

Source: JRC, 2020.

All NO<sub>2</sub> intermediate zero checks lay within the permissible zero drift (**Figure 55**). The first NO<sub>2</sub> intermediate zero check is -1.5 ppm and then the NO<sub>2</sub> drift decreases asymptotically until the end of the test (-2.5 ppm). The NO<sub>2</sub> reading of ambient air has a -0.5 ppm drop after the pre-test, and then again after driving the vehicle inside the climatic chamber, there is an additional -0.5 ppm drop.

**Figure 55.** NO<sub>2</sub> zero drift checks for static tests with drastic change of temperature – AVL-MOVE

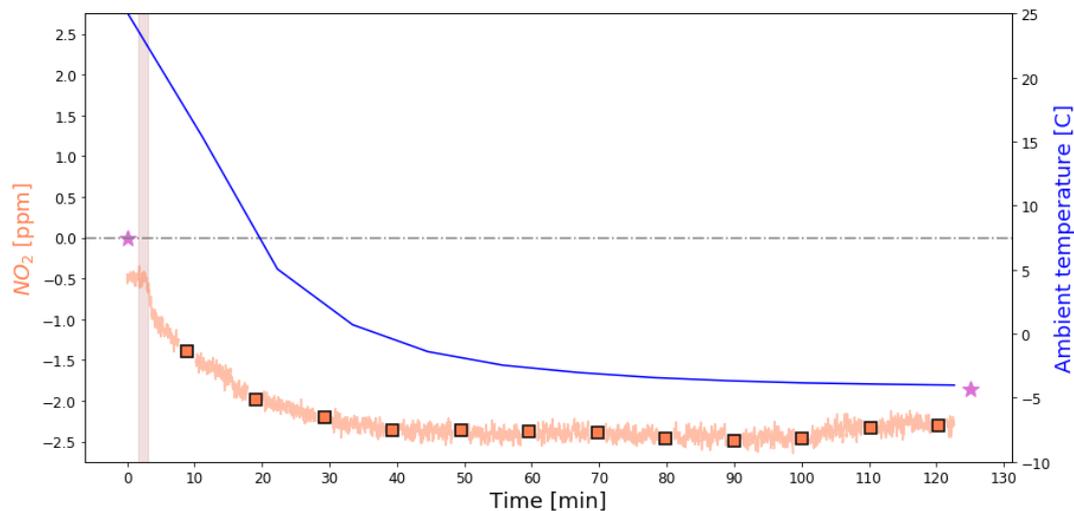


Source: JRC, 2020.

All intermediate NO<sub>x</sub> zero checks are within the permissible zero drift (**Figure 56**). The NO<sub>x</sub> zero drift is dominated by the NO<sub>2</sub> drift and it reaches a minimum of -2.5 ppm after 1.5 hours of test. As for NO<sub>2</sub>, the ambient air reading has a drop of circa -0.5 ppm after the pre-test, and another one after the drastic change of temperature.

The main outcome of the experiment is that the NO<sub>x</sub> zero reading of the PEMS is -2.5 ppm at cold ambient conditions (-7 °C) and that there is a -0.5 ppm step in the reading under a drastic change of temperature.


**Figure 56.** NO<sub>x</sub> zero drift checks for static tests with drastic change of temperature – AVL-MOVE

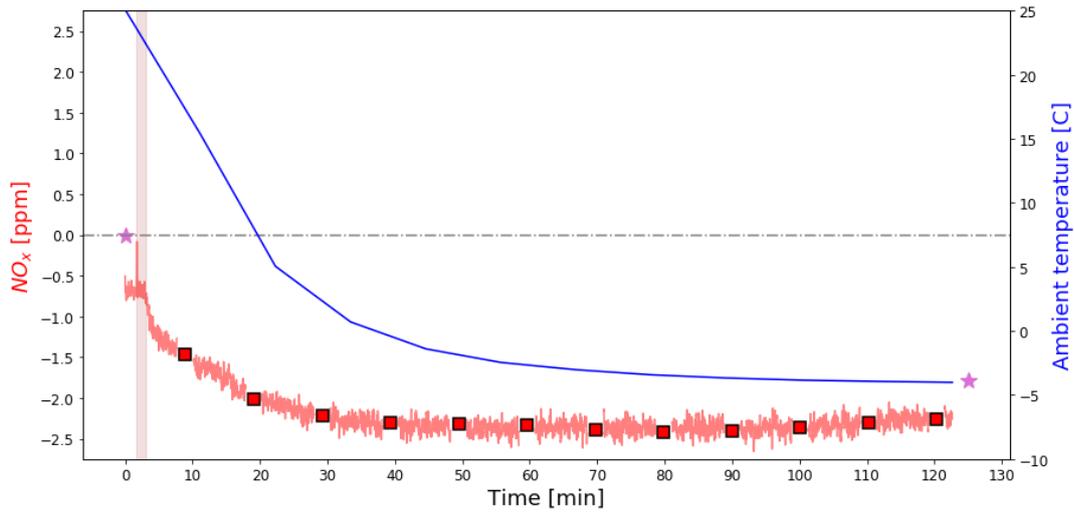

Source: JRC, 2020.

The intermediate CO<sub>2</sub> zero checks show systematically 0 values along the test (**Figure 57**). It can be therefore understood that the change in ambient temperature and the operation at -7 °C do not affect the zero CO<sub>2</sub> reading of the PEMS.


**Figure 57.** CO<sub>2</sub> zero drift checks for static tests with drastic change of temperature – AVL-MOVE

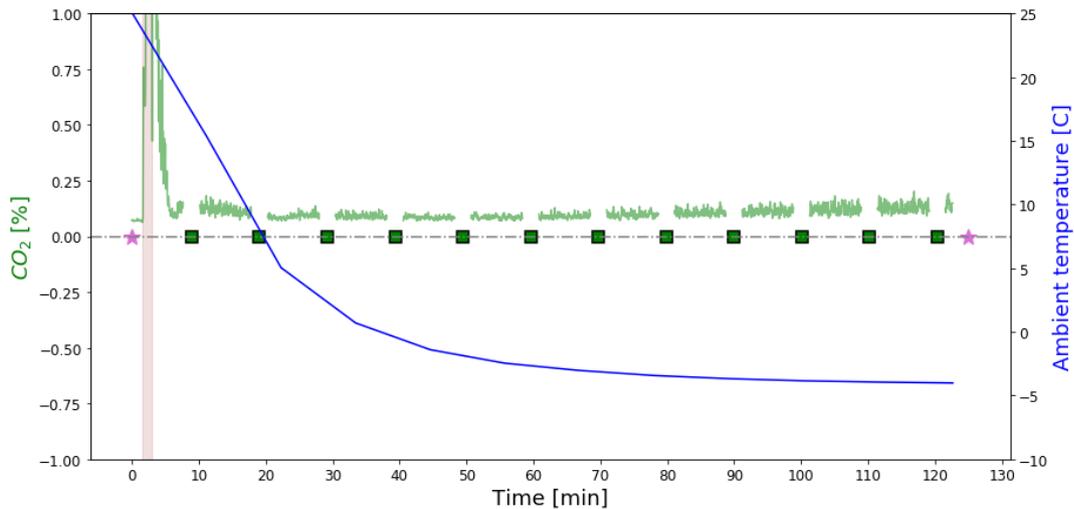

Source: JRC, 2020.

All the CO intermediate zero checks are within the permissible zero drift and the maximum value is < 15 ppm. After the drastic change of temperature, the reading of CO in the ambient air does not seem to be affected (**Figure 58**). Interestingly, after 80 minutes of the test, the reading of CO in the ambient air rises quickly from -10 ppm to 10 ppm despite the fact that the test conditions were not changed.

**Figure 58.** CO zero drift checks for static tests with drastic change of temperature – AVL-MOVE

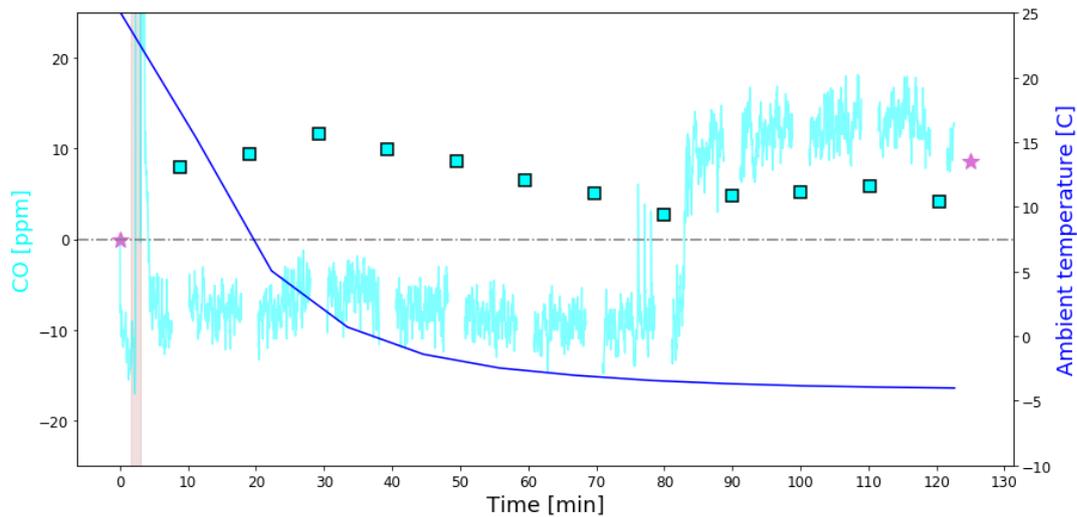

Source: JRC, 2020.


### 3.5.3.2 Tests with HORIBA OBS-ONE

The results of the tests with the HORIBA OBS-ONE are shown in **Figure 59** to **Figure 63** (for the test starting at 21 °C and changing quickly to -2 °C) and **Figure 64** to **Figure 68** (for the test starting at -7 °C and finishing at 23 °C). All figures in this section display the ambient temperature as measured by the weather station of the PEMS, which for the HORIBA instrument shows a quick response and stabilises quicker than the AVL-ONE. The pink stars in the plots represent the pre-test and post-test zero reading for each pollutant. The squares show the reading of the intermediate zero response checks. The vertical brown rectangle immediately after the pre-test on the first test shows the moment in which the vehicle was driven electrically inside the climatic chamber. On the second test, the brown rectangle before the post-test shows the time in which the combustion engine was switched on to take the car out of the climatic chamber. Finally, the coloured line represents the reading of the PEMS which shall correspond to the exhaust during and shortly after the engine-on time, and ambient air in the climatic chamber along the duration of the test.

#### Test 1

The first test with the HORIBA PEMS shows a gradual increase of NO zero along the test (**Figure 59**), which reaches asymptotically 1.5 ppm after 100 minutes of test. The reading of ambient air of the NO analyser shows a gradual increase during the first 40 minutes, although no drastic change is observed after the drastic change of ambient temperature.


**Figure 59.** NO zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

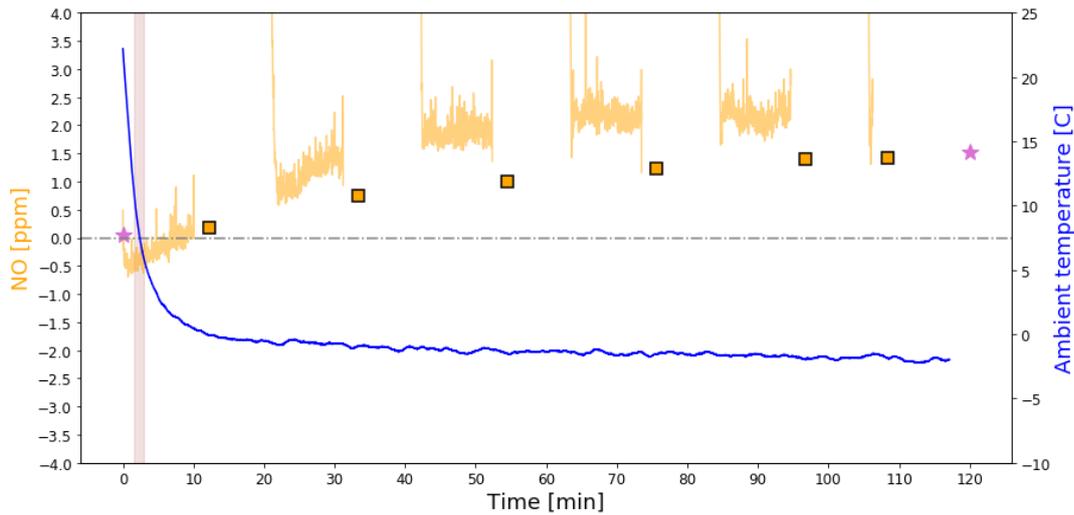

Source: JRC, 2020.

All the intermediate NO<sub>2</sub> zero checks are < -1 ppm and no particular effect of the thermal shock is observed (**Figure 60**).


**Figure 60.** NO<sub>2</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

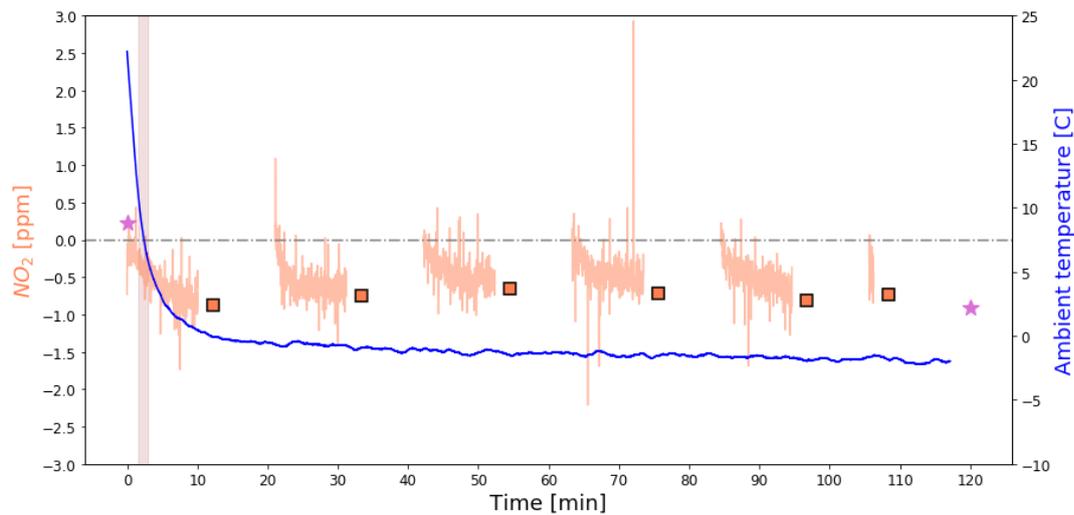

Source: JRC, 2020.

The HORIBA OBS-ONE has a zero drift of -1 ppm of NO<sub>x</sub> throughout the test, well within the permissible tolerance (**Figure 61**). As compared to the AVL-MOVE, the contribution to the total NO<sub>x</sub> zero drift in the HORIBA system is higher for NO and lower for NO<sub>2</sub>. No particular problem is identified on the NO<sub>x</sub> drift neither for operating in cold conditions or for being exposed to a drastic change in ambient temperature.


**Figure 61.** NO<sub>x</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

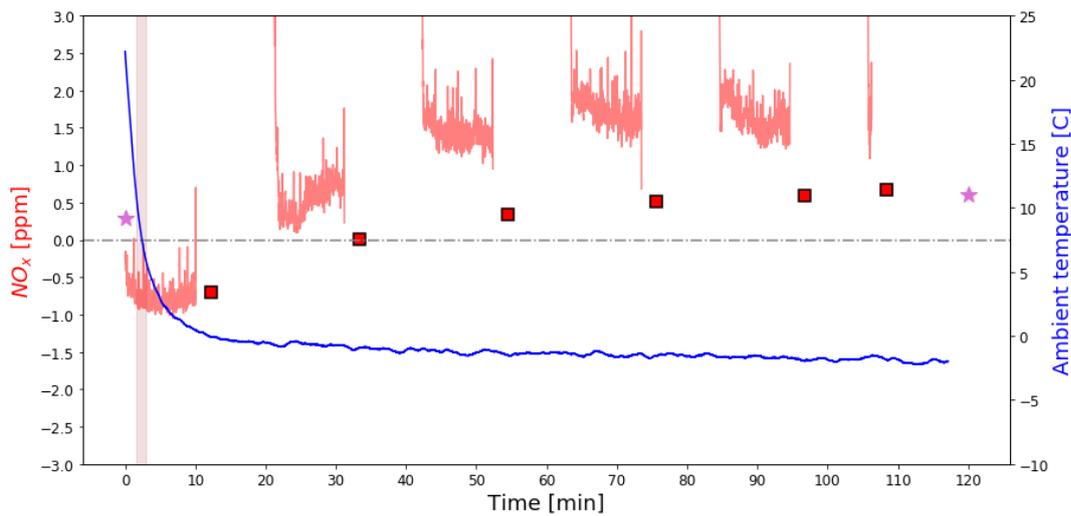

Source: JRC, 2020.

The CO<sub>2</sub> zero drift of the test is 0.02 %, one order of magnitude lower than the permissible zero drift (**Figure 62**). The zero drift of the instrument is stable throughout the test and no particular issue is observed as a consequence of the change in the operating temperature.


**Figure 62.** CO<sub>2</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

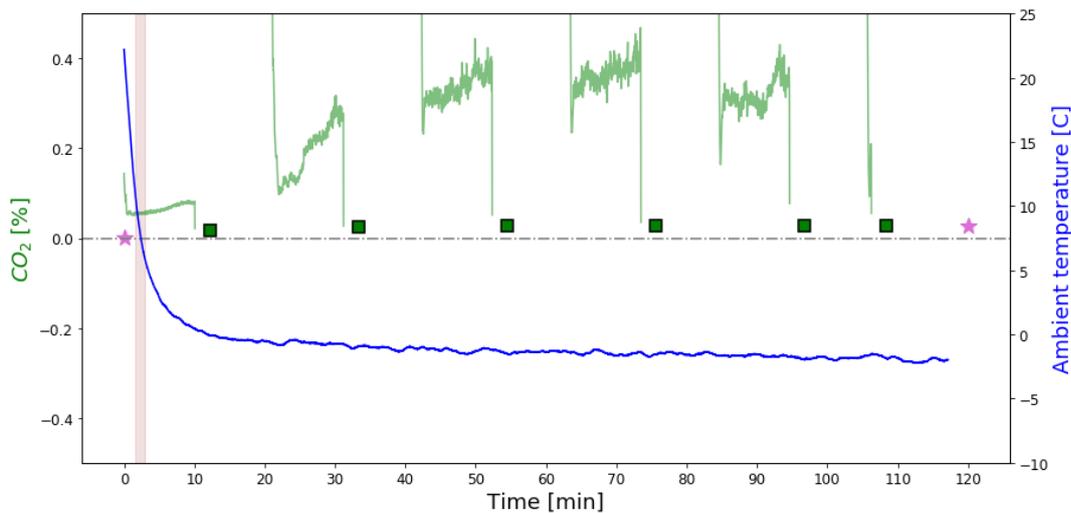

Source: JRC, 2020.

The CO zero drift of the HORIBA OBS-ONE exceeds the permissible zero drift for CO at post-test (-85 ppm), which invalidates the test (**Figure 63**). The CO zero drift decreases gradually along the test. The reading of the ambient CO also decreases gradually in the same proportion. From the observation of this test it is possible to detect a measurement issue when the PEMS is operated at low temperature as compared to the same test performed at 23 °C (**Figure 44**).

**Figure 63.** CO zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

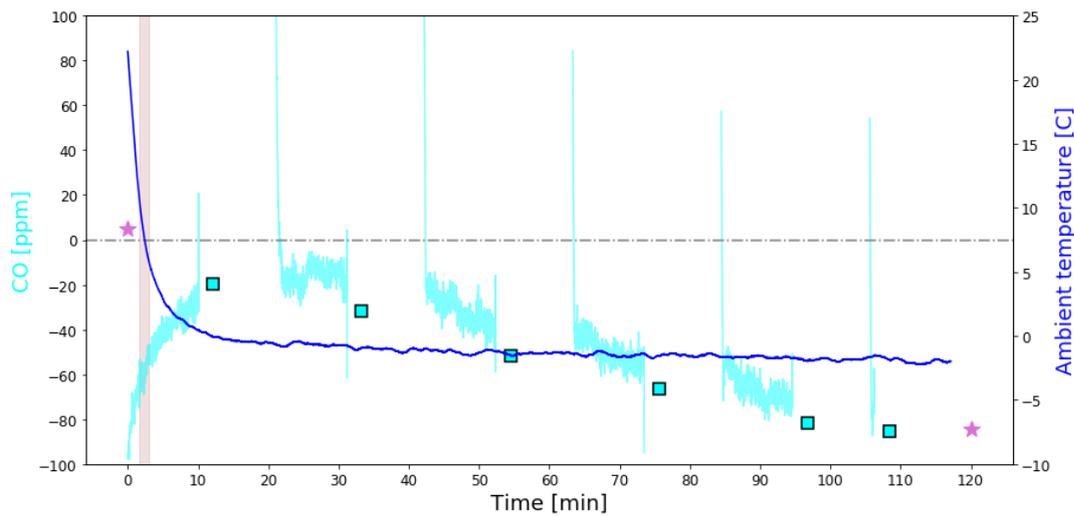


Source: JRC, 2020.

Test 2


The second test with the HORIBA OBS-ONE shows a similar behaviour as the one reported for the first test for what regards NO zero drift: there is an asymptotical increase of NO intermediate zero readings until 1.5 ppm (**Figure 64**). However, the post-test which is done at an ambient temperature 30 °C higher than the temperature of the test shows a -3 ppm jump as compared to the last intermediate zero check. Despite this jump, the NOx zero drift is within the permissible tolerance.

**Figure 64.** NO zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

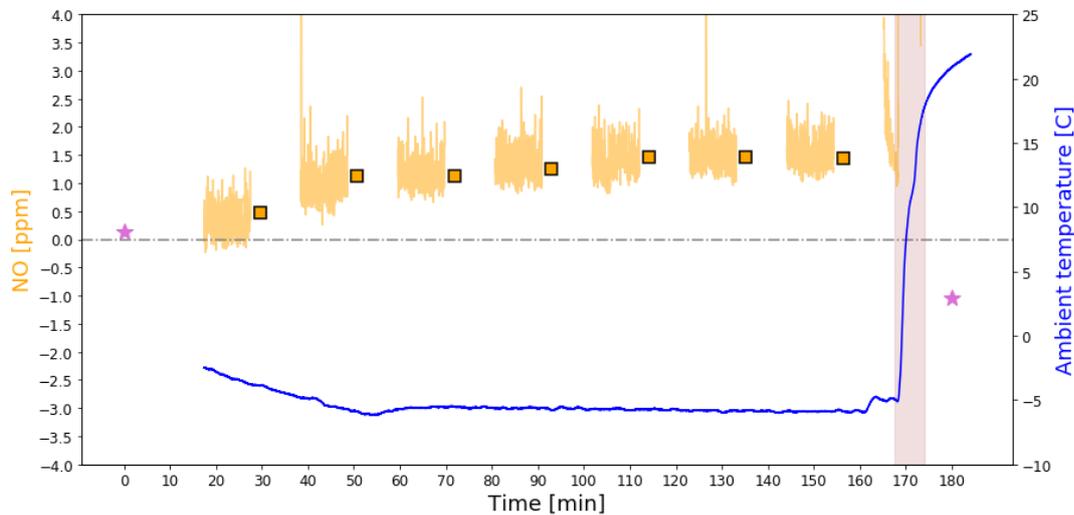

All the intermediate NO<sub>2</sub> zero checks performed while the vehicle is inside the climatic chamber at -7 °C are < -0.5 ppm and no issue is observed caused by the cold conditions of the test on the zero drift. However, the post-test which is performed after the thermal shock has a 3 ppm jump respect to the previous zero check (**Figure 65**). This jump is essentially the counterpart of the one observed for NO as NO<sub>2</sub> is calculated from NO and NOx for this PEMS. Despite this behaviour, the test is valid as the permissible limits for zero drift are not exceeded.


**Figure 65.** NO<sub>2</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

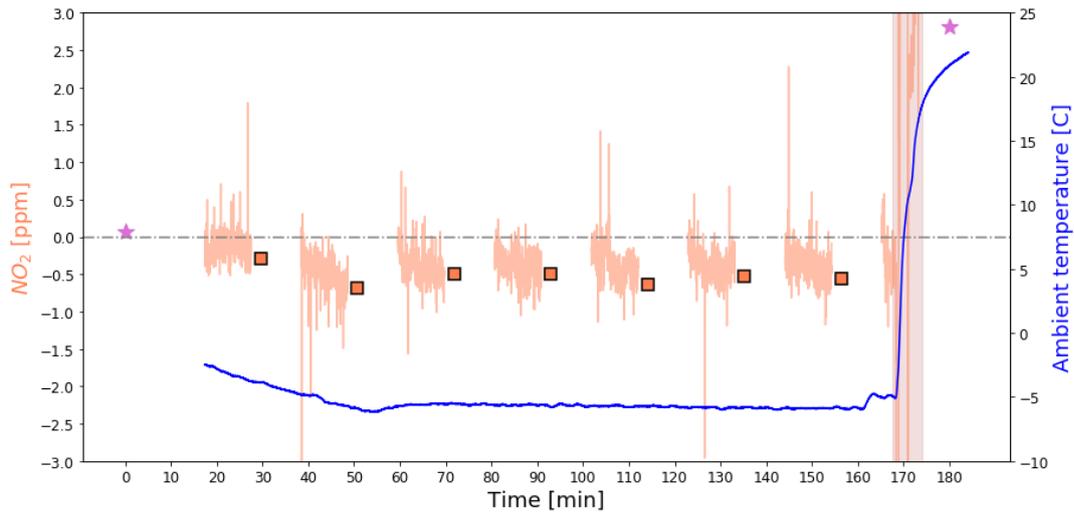

Source: JRC, 2020.

When considering the NO<sub>x</sub>, the HORIBA OBS-ONE operates well in cold conditions, with a zero NO<sub>x</sub> drift which is stable around 1 ppm along the test and despite the drastic change in temperature, the final NO<sub>x</sub> drift is below 2 ppm, which is less than half of the permissible zero drift (**Figure 66**).


**Figure 66.** NO<sub>x</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

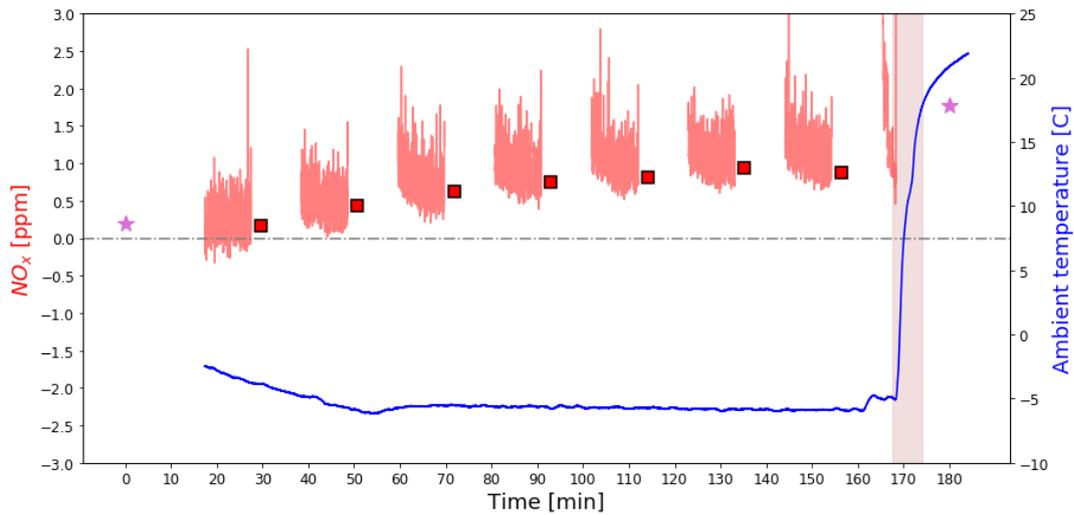

Source: JRC, 2020.

As for Test 1, the CO<sub>2</sub> zero drift during the test at -7 °C is circa 150 ppm, one order of magnitude lower than the permissible zero drift. No particular effect on the drift is observed at the end of the test after the thermal shock (**Figure 67**).


**Figure 67.** CO<sub>2</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

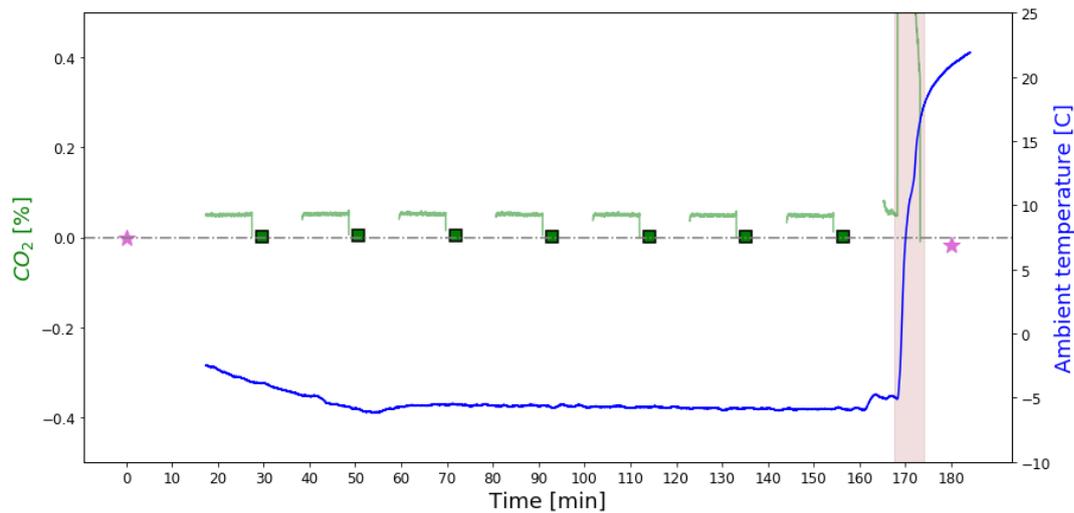

Source: JRC, 2020.

The CO zero drift decreases linearly along the time of the test, exceeding the permissible -75 ppm after two hours of test confirming that at -7 °C the instrument tends to drift negatively (**Figure 68**). In addition, it is important to notice that after taking the vehicle out of the climatic chamber, the post-test zero check for CO has a small positive jump which brings the final CO drift again within permissible tolerance (i.e., this test shall be invalidated but because of the effect of the drastic change in temperature on the analyser, the test is valid)

**Figure 68.** CO zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE

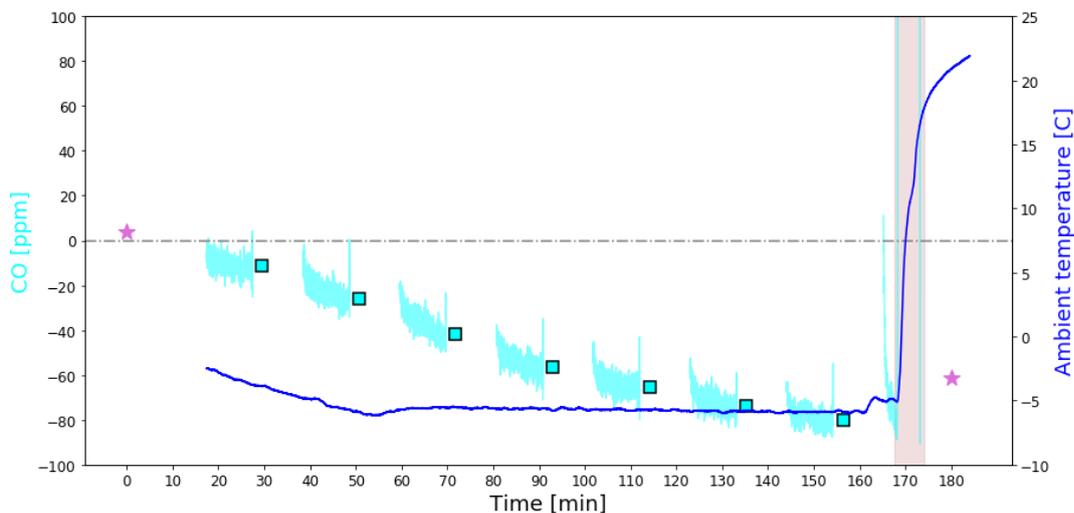

Source: JRC, 2020.

As a conclusion of the tests done with drastic change of temperature for what regards NO<sub>x</sub>, both PEMS intermediate and final zero drift checks were within permissible tolerances. No particular issue was observed while operating in cold temperatures. When the test is done in cold conditions and the PEMS is then exposed at post-test at much higher ambient temperature, the analysers may be affected although still complying with the permissible limits. As a general recommendation the pre and post-tests should be done at similar ambient temperature than the one occurring during the test and exposing the PEMS to drastic thermal changes shall be avoided to prevent measurement issues.

## 4 Evaluation of JRC PEMS activity

This section presents i) the results of zero drift of NO, NO<sub>2</sub> and NO<sub>x</sub> for the on-road data gathered throughout 2018 on 19 Euro 6 vehicles totalizing 185 PEMS tests, ii) the outcomes of PEMS validations, and iii) an assessment of the zero drift of the exhaust mass flowmeter based on experimental data gathered by JRC in 2018. All tests were conducted with the AVL MOVE units.

### 4.1 Zero drift of NO, NO<sub>2</sub>, and NO<sub>x</sub>

The NO zero drift for 185 PEMS tests has a mean and median lower than 0.25 ppm, which is one order of magnitude lower than the permissible drift (5 ppm) (**Table 4**). Only one of the 185 tests had an NO zero drift exceeding 5 ppm.

The average zero drift of NO<sub>2</sub> is slightly above 0.5 ppm, and 90% of the tests have a NO<sub>2</sub> drift within  $\pm 5$  ppm.

The combined NO<sub>x</sub> zero drift is on average 2.0 ppm, less than half the permissible NO<sub>x</sub> zero drift. Roughly 90% of the PEMS tests performed had a NO<sub>x</sub> zero drift below 5 ppm. The NO<sub>2</sub> zero drift has a larger contribution to the total NO<sub>x</sub> drift.

In general terms, the results show that the zero drift between the test-start and the test-end are well within the tolerances foreseen in the regulation and that both analysers operate as expected when considering a large number of tests.

**Table 4.** NO, NO<sub>2</sub> and NO<sub>x</sub> zero drift from the JRC 2018 PEMS test campaign (n = 185).

[ppm]	Mean	Std. deviation	Median
NO	0.223	0.606	0.180
NO <sub>2</sub>	0.544	2.494	0.390
NO <sub>x</sub>	2.034	2.176	1.135


Source: JRC, 2020.

The distribution of the zero drift for NO, NO<sub>2</sub>, and NO<sub>x</sub> per each of the three PEMS units used in the campaign are shown in **Figure 69**, **Figure 70**, and **Figure 71**, respectively. The three instruments have a similar behaviour for NO, with a modal distribution of zero drift centred in 0 ppm and a standard deviation of less than 1 ppm.

Regarding NO<sub>2</sub>, PEMS AVL-3 has a median drift of 1.5 ppm, whereas the other two units have a median drift of 0 ppm. Most of the exceedances of the 5 ppm permissible tolerance correspond to the unit PEMS AVL-1.


When combining the zero drift of both analysers, the NO<sub>x</sub> zero drift is lower than 3 ppm for the three PEMS units, with a median zero drift of 1 to 2 ppm. The maximum NO<sub>x</sub> zero drift from the campaign was 9.5 ppm (**Figure 71**).

**Figure 69.** NO zero drift of PEMS tests performed by JRC on 2018 as function of PEMS instrument

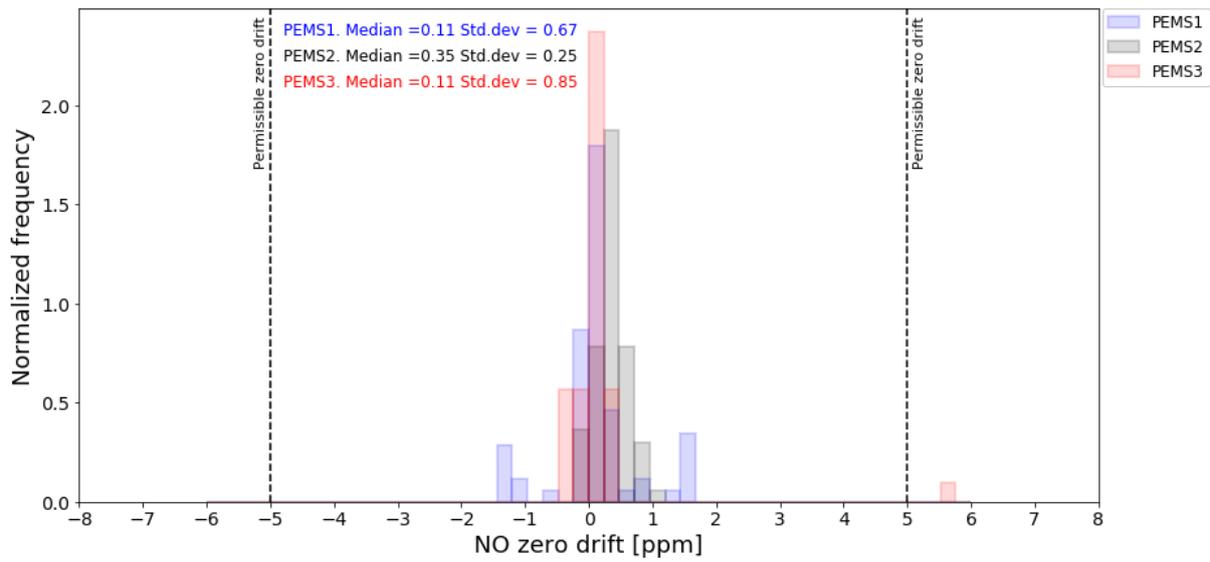


Source: JRC, 2020.

**Figure 70.** NO<sub>2</sub> zero drift of PEMS tests performed by JRC on 2018 as function of PEMS instrument

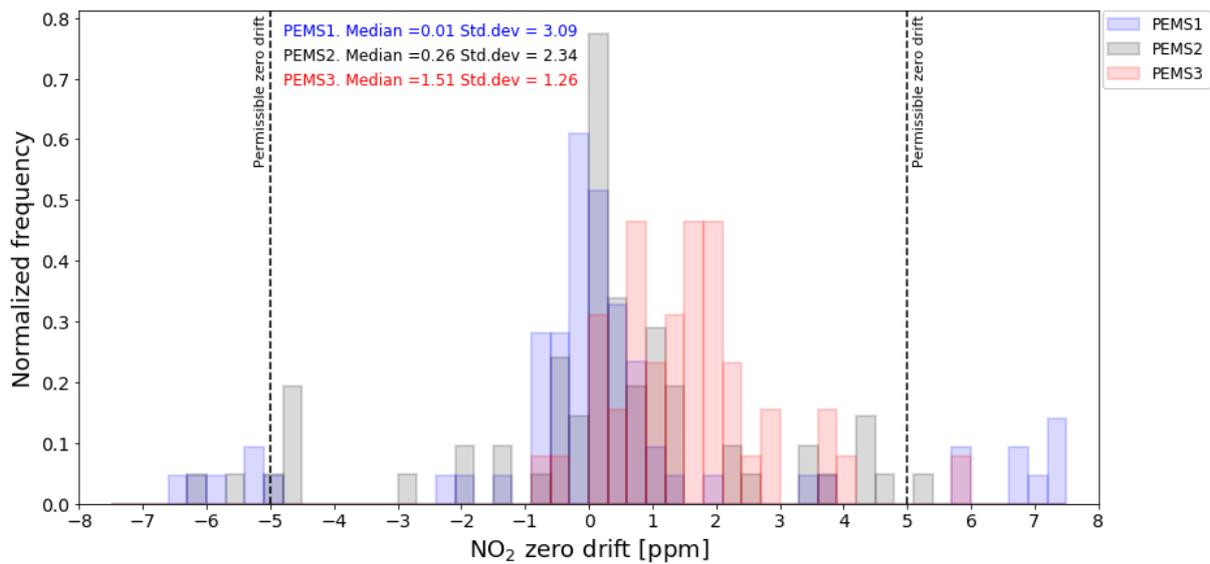


Source: JRC, 2020.

**Figure 71.** NO<sub>x</sub> zero drift of PEMS tests performed by JRC on 2018 as function of PEMS instrument top) NO<sub>x</sub> zero calculated as sum of absolute NO and NO<sub>2</sub> zero drifts. bottom) NO<sub>x</sub> zero calculated as sum of NO and NO<sub>2</sub> zero drifts.

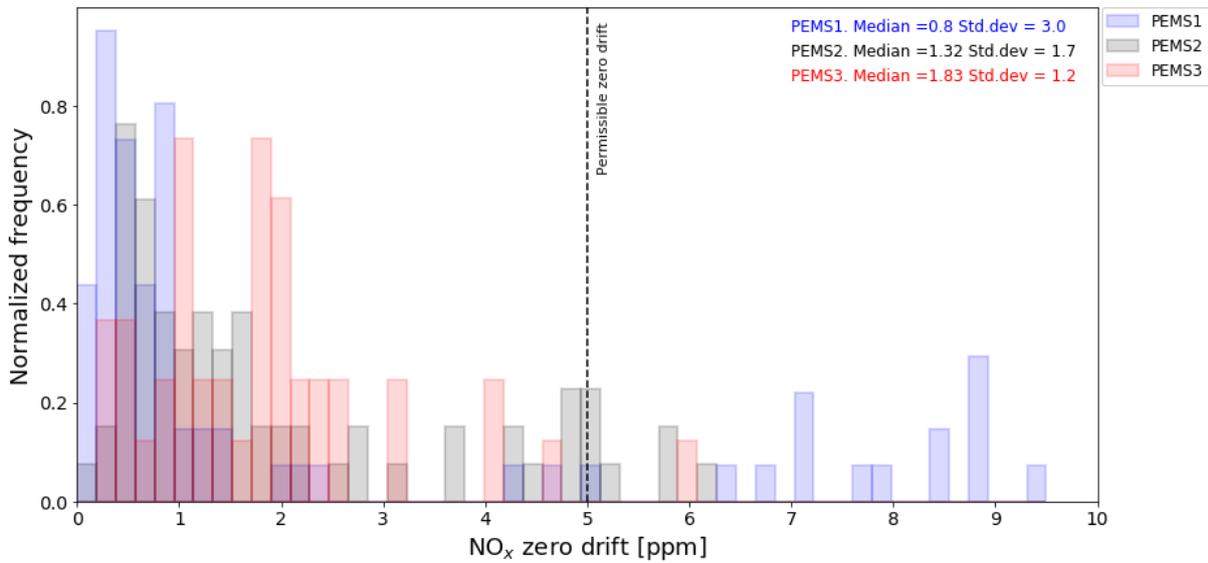

Source: JRC, 2020.

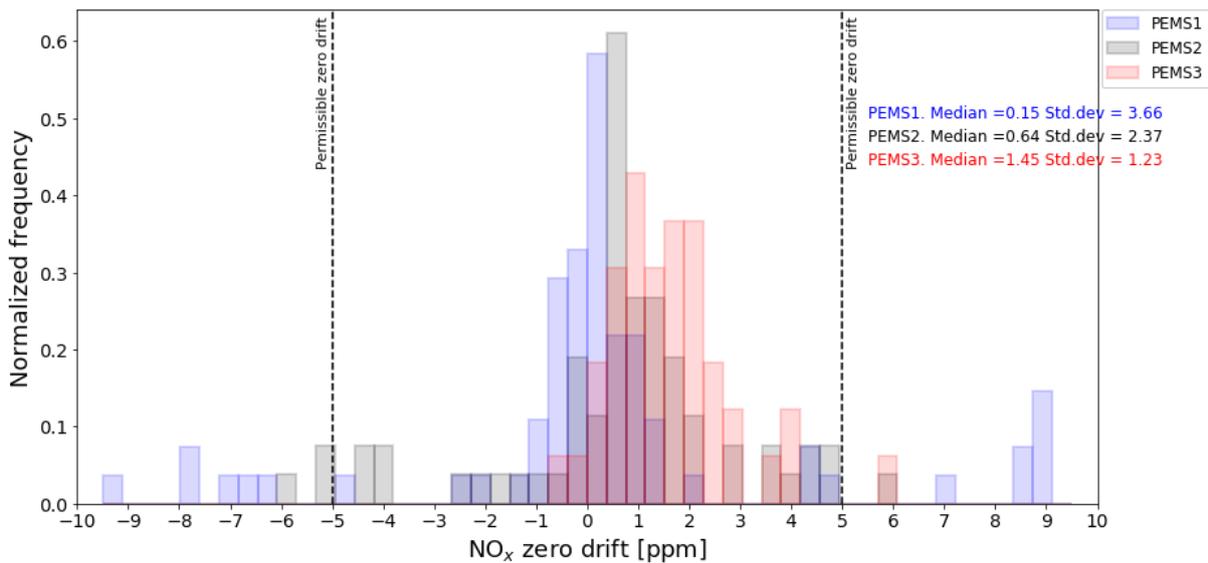


Source: JRC, 2020.

The influence of ambient temperature, ambient humidity, and PEMS installation location on NO, NO<sub>2</sub>, and NO<sub>x</sub> zero drift was analysed using the JRC 2018 test campaign data. **Figure 72** shows that PEMS tests were performed over the 2018 year on a range of average ambient temperature from 3 °C to 33 °C, and 16% to 95% relative humidity. On that range of conditions, no effect of ambient temperature or ambient humidity is seen on the NO zero drift value. From the location of the PEMS point of view, no specific trend is observable in the NO zero drift with most of the data within  $\pm 2$  ppm, when the unit is installed in the trailer hook and in the cabin.


The NO<sub>2</sub> zero drift does not show correlation either with average ambient temperature and ambient humidity (**Figure 73**). Despite the fact that all exceedances of the NO<sub>2</sub> zero drift tolerance (5 ppm) occur at temperatures above 15 °C, no correlation exist between ambient temperature and NO<sub>2</sub> drift. The exceedances of NO<sub>2</sub> zero drift occur both when the PEMS is installed on the trailer hook or in the cabin.

For NO<sub>x</sub>, the same observations done for NO<sub>2</sub> apply: no correlation between zero drift and ambient temperature and relative humidity is seen in the 2018 data. Also, the exceedances of the 5 ppm tolerance occur when the PEMS is installed in the trailer hook and in the cabin (**Figure 74**).

**Figure 72.** NO zero drift of PEMS tests performed by JRC on 2018 as function of PEMS installation location and top) ambient temperature, bottom) ambient humidity

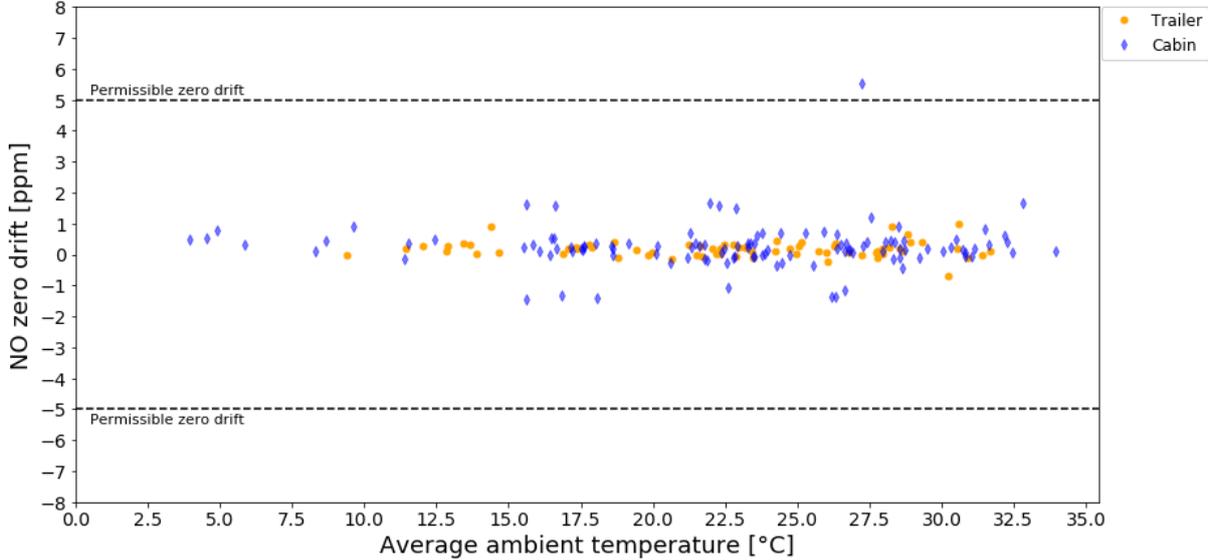

Source: JRC, 2020.

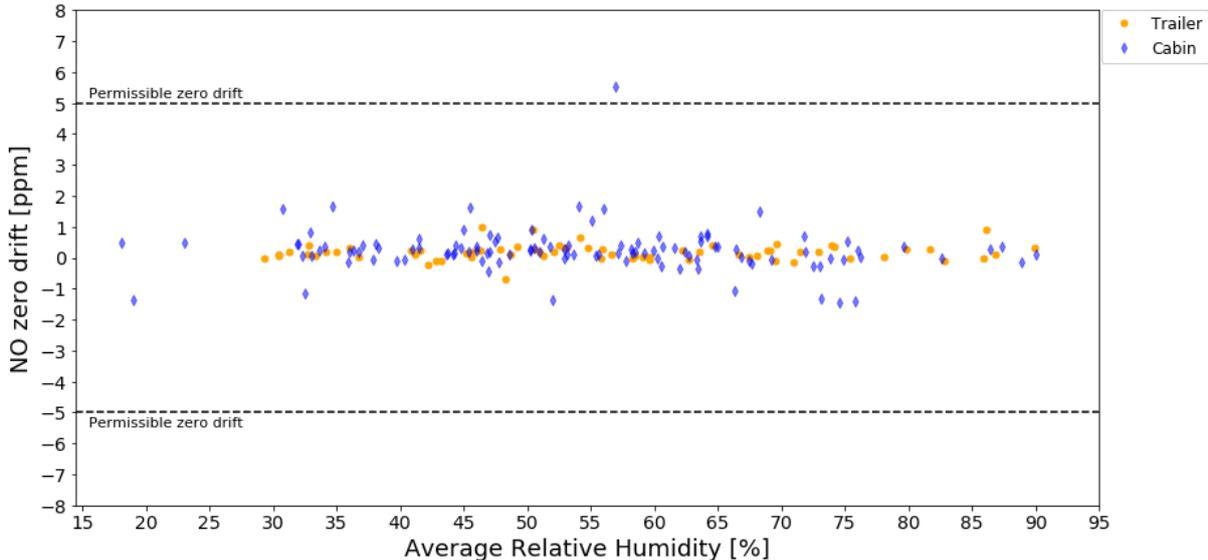


Source: JRC, 2020.


Among the different test routes used by the JRC on its 2018 campaign, it is possible to differentiate tests done in moderate altitude conditions (altitude up to 700 meters above sea level) and the SAC test, which includes ~20 minutes (~20% of the test duration) in extended conditions reaching a maximum altitude of 1100 meters above sea level (Annex 1C, Valverde *et al.*, 2019). The comparison of the NO (**Figure 75**), NO<sub>2</sub> (**Figure 76**), and NO<sub>x</sub> (**Figure 77**) zero drift between tests done in moderate conditions (176 tests) and partially in extended altitude conditions (SAC = 19 tests) shows similar distributions with virtually no distinction on the zero drift between tests. These results build on the idea that operation in altitude does not affect the zero drift behaviour of gas analysers.

From the JRC 2018 PEMS campaign data, it can be concluded that there is no particular effect of boundary conditions on the NO<sub>x</sub> zero drift: the NO and NO<sub>2</sub> analysers have a zero drift below the permissible tolerance over a wide range of ambient humidity and ambient temperatures (although not sub-zero tests are considered). Also, the PEMS installation location shows no particular effect on the NO<sub>x</sub> zero drift with an overall good performance of the PEMS when operated both in the trailer hook and in the cabin. Tests done in extended altitude conditions (> 700 and up to 1100 meters above sea level) have similar zero drift values than tests done at moderate altitude conditions. Vibrations, which affect the PEMS in any of the installation locations, are considered in these testing conditions, which reproduce RDE tests, and no specific effect is observed on NO<sub>x</sub> zero drift.

**Figure 73.** NO<sub>2</sub> zero drift of PEMS tests performed by JRC on 2018 as function of PEMS installation location and top) ambient temperature, bottom) ambient humidity

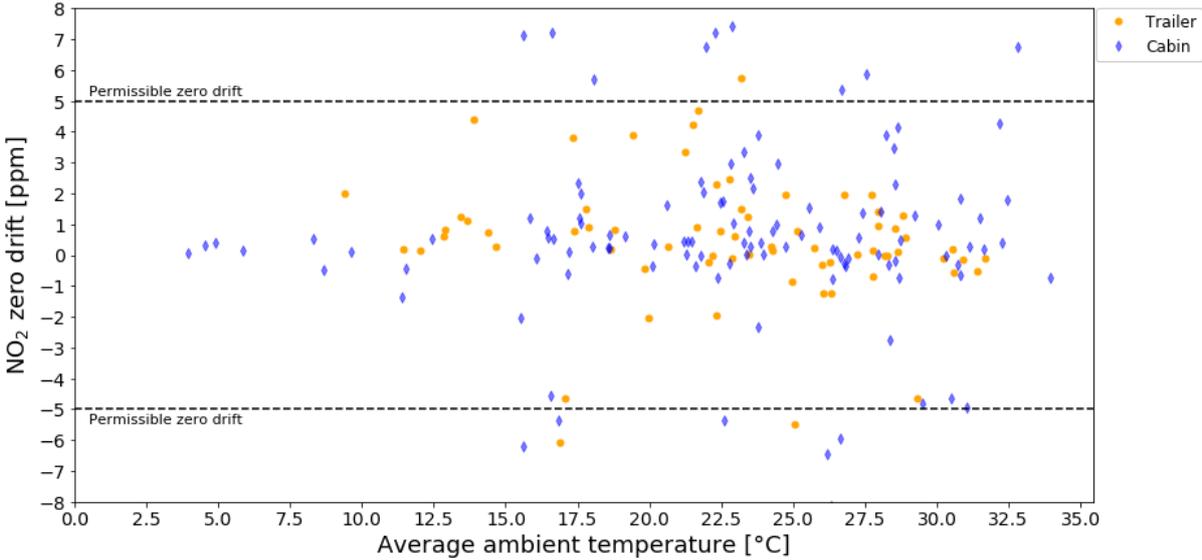


Source: JRC, 2020.

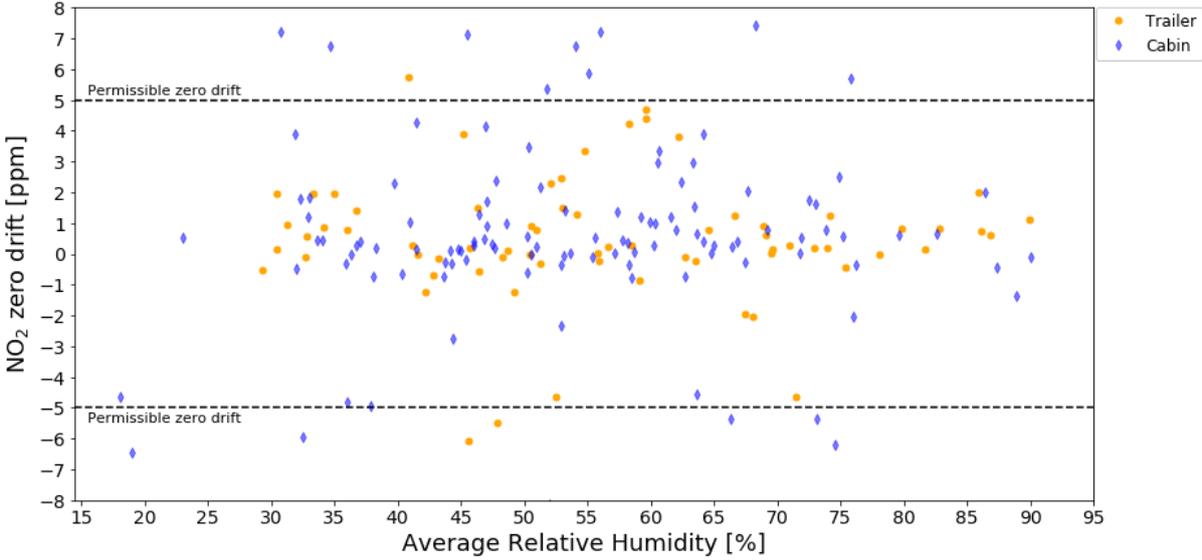


Source: JRC, 2020.

**Figure 74.** NO<sub>x</sub> zero drift of PEMS tests performed by JRC on 2018 as function of PEMS installation location and top) ambient temperature, bottom) ambient humidity

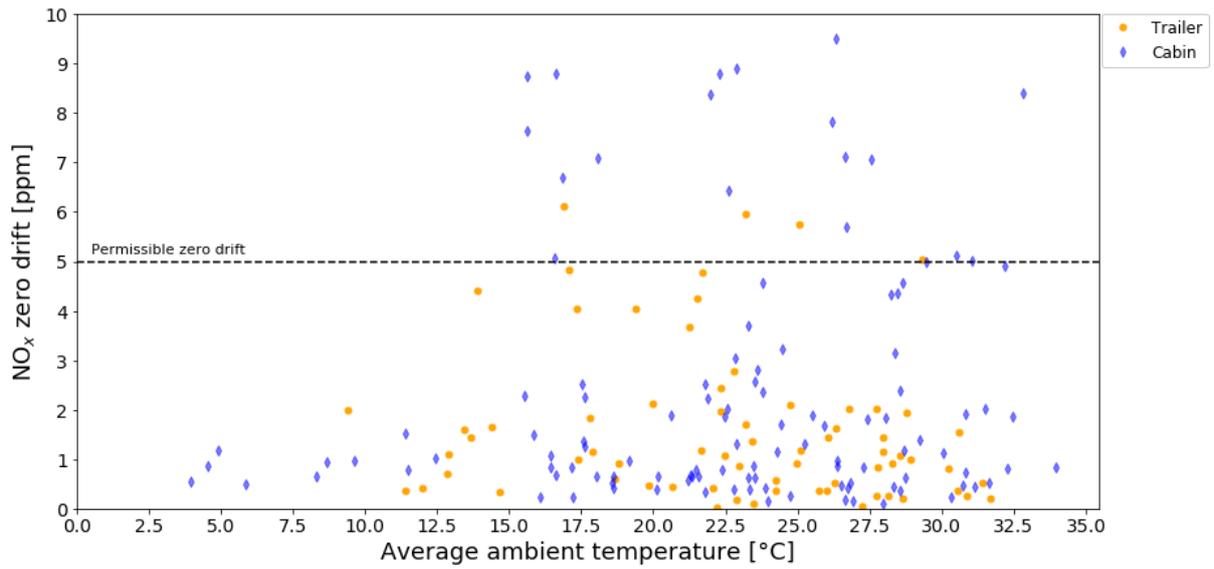


Source: JRC, 2020.

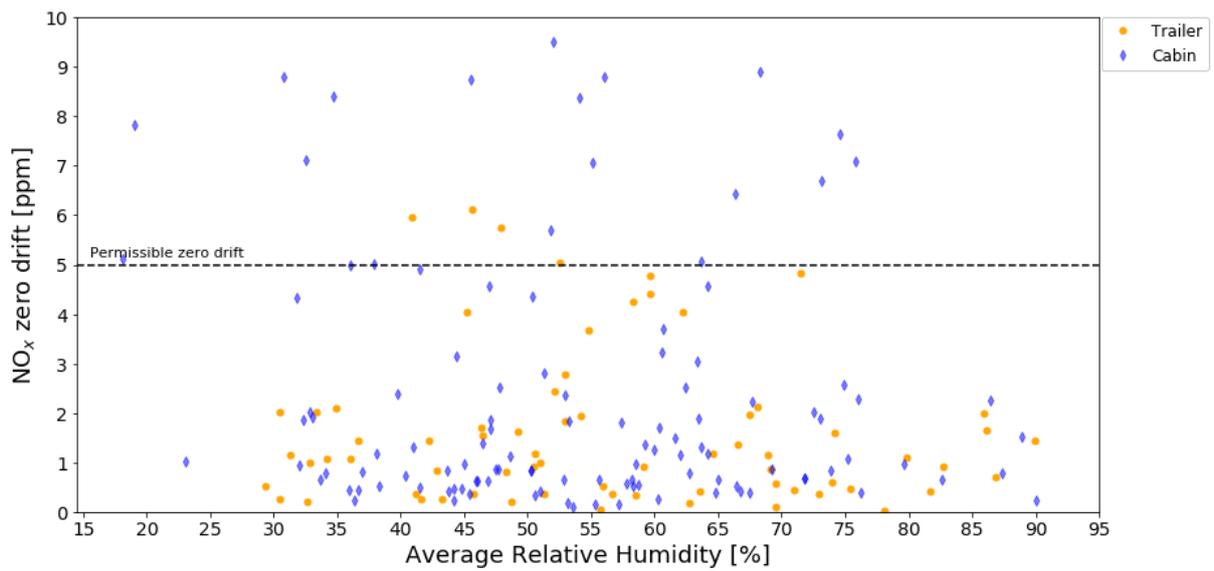


Source: JRC, 2020.


**Figure 75.** NO zero drift of PEMS tests performed by JRC on 2018 as function of altitude

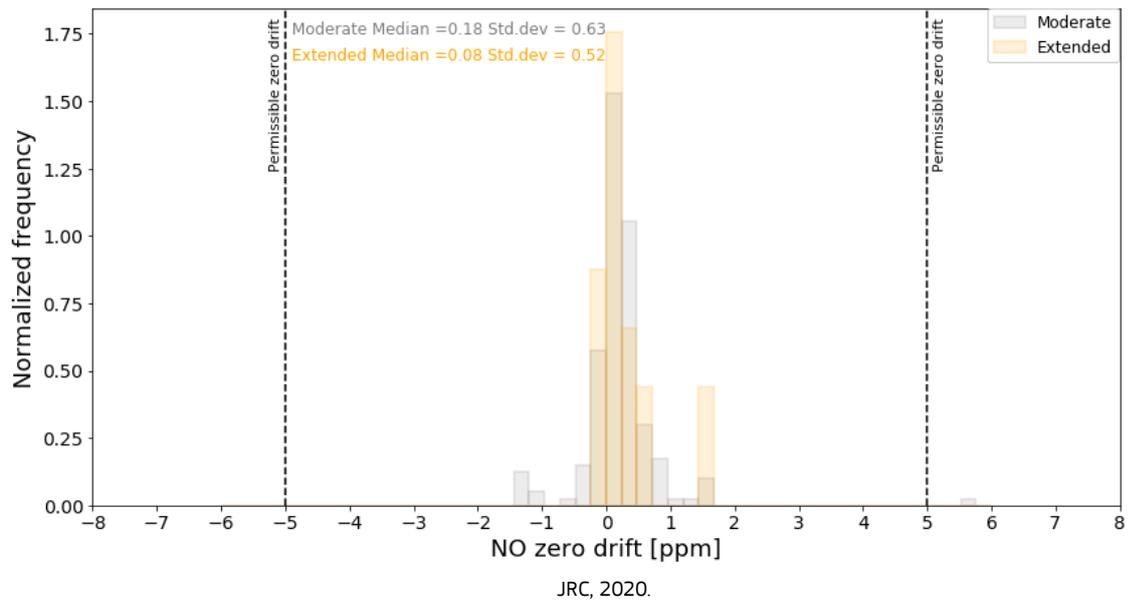


**Figure 76.** NO<sub>2</sub> zero drift of PEMS tests performed by JRC on 2018 as function of altitude

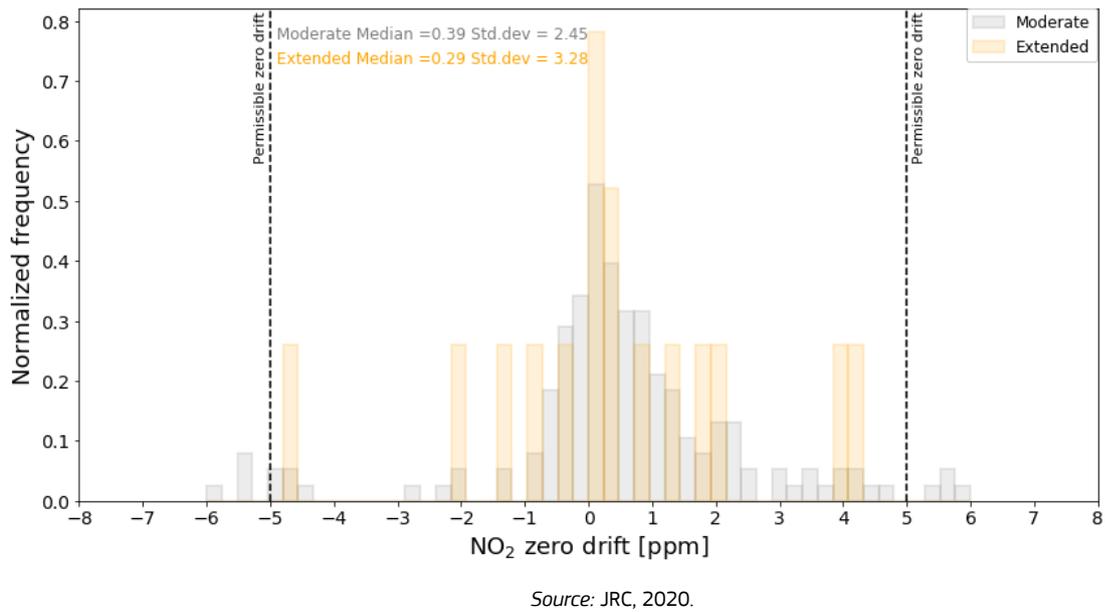

**Figure 77.** NO<sub>x</sub> zero drift of PEMS tests performed by JRC on 2018 as function of altitude top) NO<sub>x</sub> zero calculated as sum of absolute NO and NO<sub>2</sub> zero drifts. bottom) NO<sub>x</sub> zero calculated as sum of NO and NO<sub>2</sub> zero drifts.

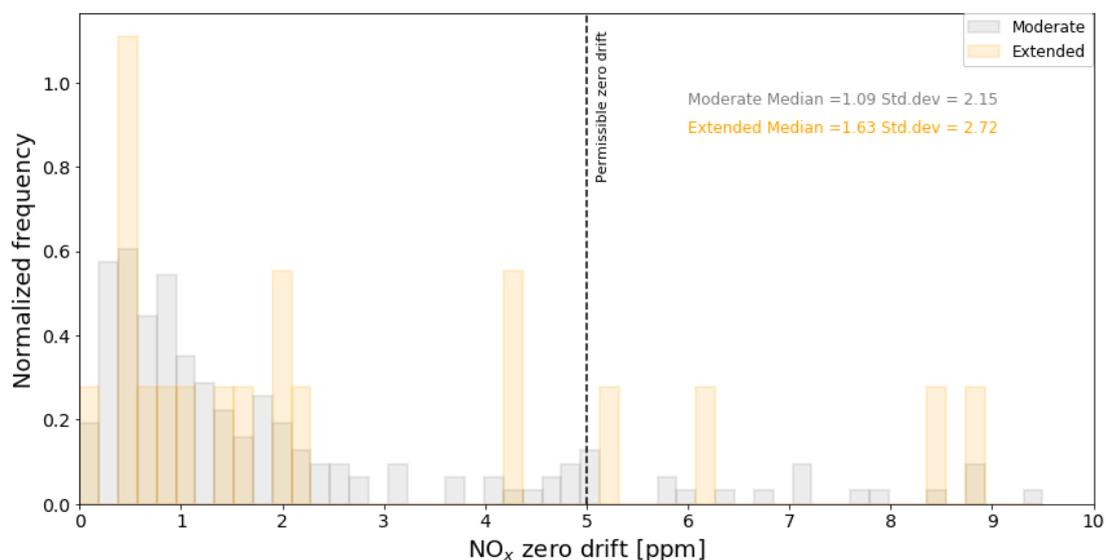

Source: JRC, 2020.

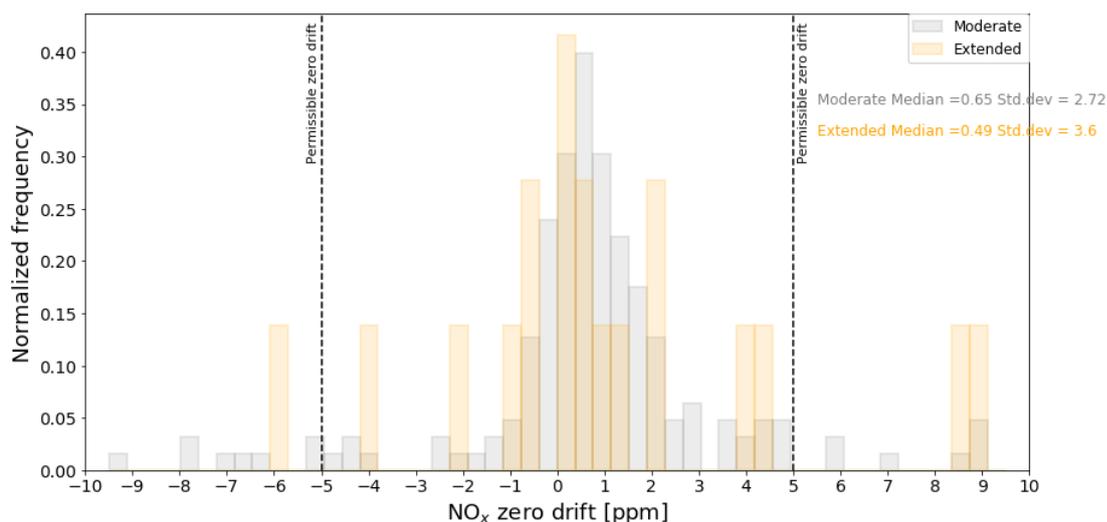

Source: JRC, 2020.

## 4.2 PEMS validations

It is of common practice at JRC that a PEMS installation on-board a vehicle is validated by performing a comparison of the main parameters (emission concentrations, exhaust mass flow, and distance) against laboratory grade equipment in the VELA facilities. The PEMS validations are usually done either following the NEDC or the WLTP test procedures, fulfilling the requirements laid down in EU regulations for what regards the settings of the chassis dyno and the PEMS. Validation tests were performed on a cold or a hot vehicle, and the ambient temperature of the test cell varied from 14 °C to 25 °C, depending on the test. The relative humidity in the test cell was in all cases ~ 50%, and no NO<sub>x</sub> humidity correction was applied to the PEMS measurements. Two different JRC laboratories were used to perform PEMS validations: VELA2 with HORIBA instrumentation and VELA8 with AVL instrumentation. The validations were done with the three PEMS units from AVL introduced in the experimental section. All validation tests were performed with their specific pre-test and post-test, and in all cases, the NO, NO<sub>2</sub>, and NO<sub>x</sub> zero drift were within the permissible limits.

Depending on laboratory availability and testing agenda, the PEMS validation is performed either before or immediately after the test campaign with the PEMS. In 2018, 26 PEMS validations were performed on a total of thirteen vehicles: twelve passenger cars and one light commercial vehicle. The PEMS validations covered all tested powertrains: diesel (5 vehicles), gasoline GDI (2), gasoline PFI (3), LPG (1) and CNG (2).

**Figure 78** shows the results of the validation tests for NO<sub>x</sub> in terms of distance-specific emissions (top figure for absolute values respect laboratory bag values, and bottom for relative differences). The failure rate of the PEMS for NO<sub>x</sub> was ~4%, with a single test exceeding the permissible absolute tolerance (15 mg/km) and relative tolerance (15% of the laboratory reference) simultaneously. This specific test was performed on a standard NEDC cycle with a warm engine on a diesel Euro 6b vehicle. A previous validation repetition of the same PEMS installation on the NEDC cold test was within the permissible relative tolerance (11% deviation of the PEMS respect the laboratory).

For all other validation tests, independently from the test cycle used, the vehicle powertrain, the engine temperature condition at the test start, and the ambient temperature, the NO<sub>x</sub> measurement from the PEMS was within the permissible difference respect the one measured by the laboratory instrumentation. In general, the largest absolute difference occurred on vehicles with the highest NO<sub>x</sub> emissions of the tested fleet: Euro 6b diesel vehicles. On the other hand, the largest relative difference was measured on vehicles with low NO<sub>x</sub> emissions: gasoline (PFI) vehicles.

In the plots of **Figure 78**, the codes in the x-axis correspond to a combination of powertrain (D: diesel, G: gasoline), test cycle (N: NEDC, W: WLTP, IDC: Indian driving cycle), and test condition (C: cold engine condition, H: hot engine condition). A numeric value at the end of the code indicates the repetition number.

For the other gases measured with the PEMS (CO, CO<sub>2</sub> **Figure 79**) there is also a good performance of the analysers in laboratory conditions with low number of tests outside the permissible tolerances (< 5% for single analysers). When considering all analysers at the same time, the exhaust mass flow meter and the distance as measured from the OBD, the PEMS validation failure ratio from the 2018 JRC test campaign raised to 12%.

A PEMS validation test performed in VELA2 over a WLTP with a unit of AVL-MOVE (AVL-1) at an ambient temperature of -7 °C resulted in a passed validation, with all gaseous emissions within permissible tolerances (**Table 5**). Two additional PEMS validation tests were performed with the AIP PEMS over a WLTP test in VELA8 at an ambient temperature of 23 °C and -7 °C. Both tests were valid: zero drift of analysers was within the permissible tolerance and absolute and relative distance-specific lab to PEMS differences were also lower than regulated thresholds for all pollutants.


**Table 5.** Results of PEMS validation test performed at -7 °C

	Laboratory	PEMS	Absolute difference	Relative limit [%]	Criteria
CO [mg/km]	454.2	409.5	-44.7	-9.8	Pass
CO <sub>2</sub> [g/km]	140.9	144.50	3.6	2.6	Pass
NO <sub>x</sub> [mg/km]	37.2	36.2	1.0	-2.7	Pass


Source: JRC, 2020.

It can be concluded that in the laboratory, when the ambient conditions are stable and PEMS are not exposed to stressful conditions, the NO and NO<sub>2</sub> analysers perform well with no specific effect on the drift.

**Figure 78.** Validation of NOx measurement with PEMS against laboratory grade equipment from 2018 JRC PEMS activity top) absolute difference, bottom) relative difference. The red dotted lines indicate the permissible tolerances for NOx on PEMS validation tests. The hatches indicate the failed PEMS validation.

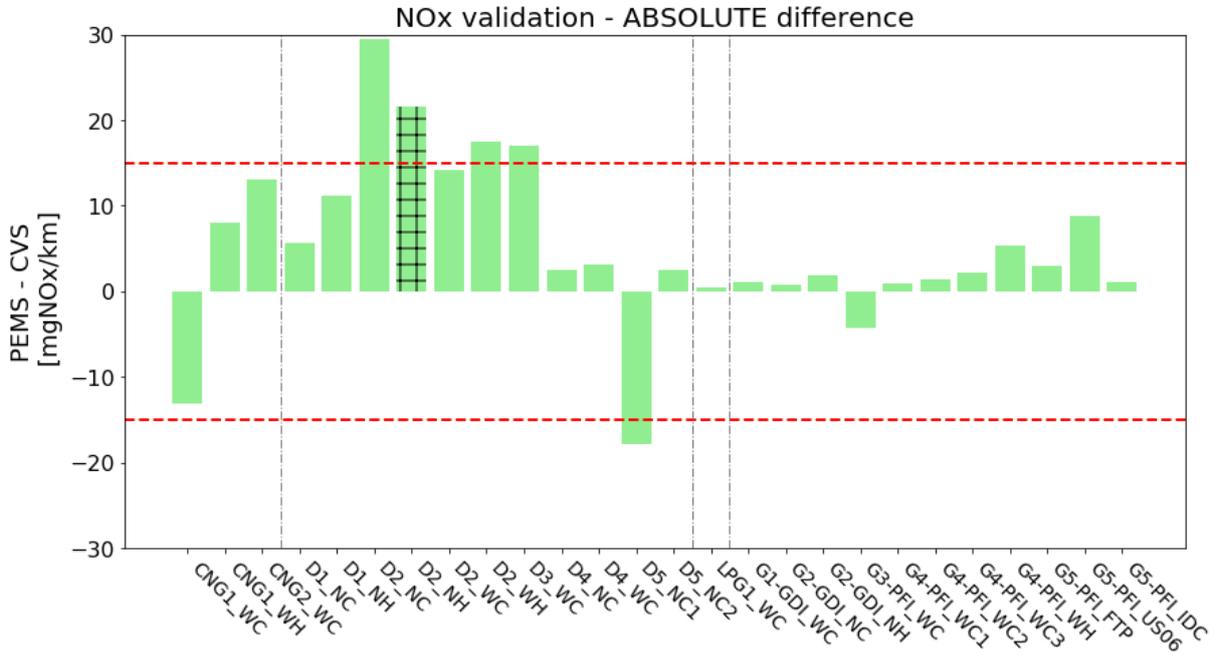


Source: JRC, 2020.

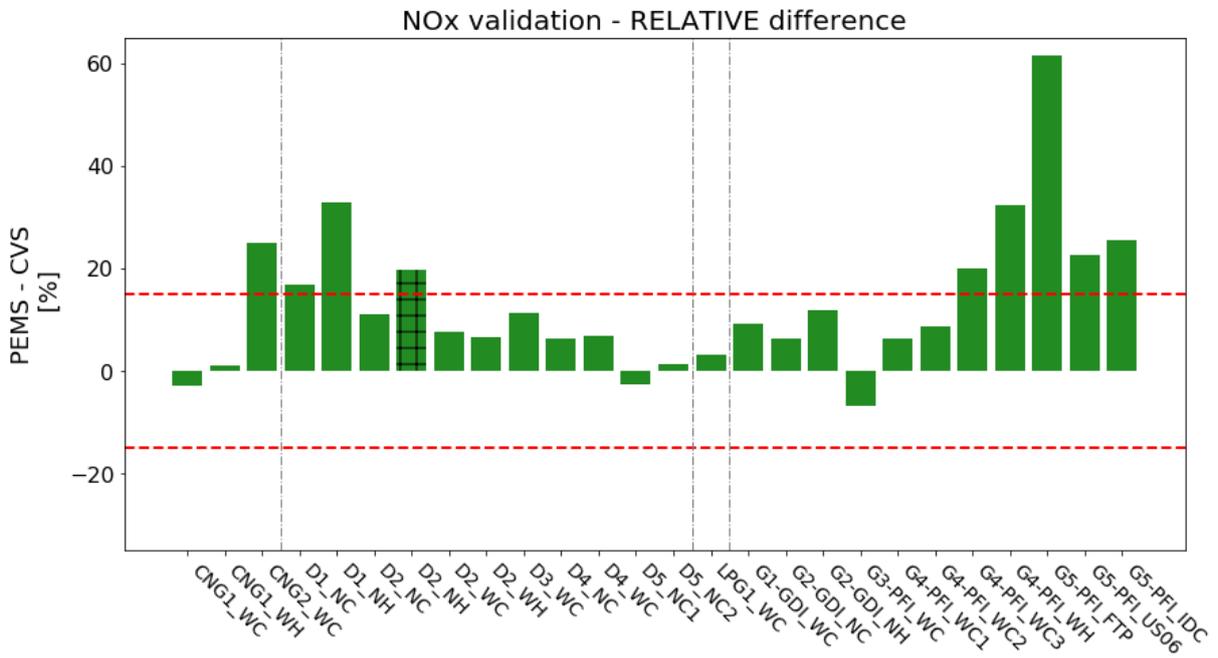


Source: JRC, 2020.

**Figure 79.** Validation of CO<sub>2</sub> measurement with PEMS against laboratory grade equipment from 2018 JRC PEMS activity top) absolute difference, bottom) relative difference. The red dotted lines indicate the permissible tolerances for CO<sub>2</sub> on PEMS validation tests. The hatches indicate the failed PEMS validation.

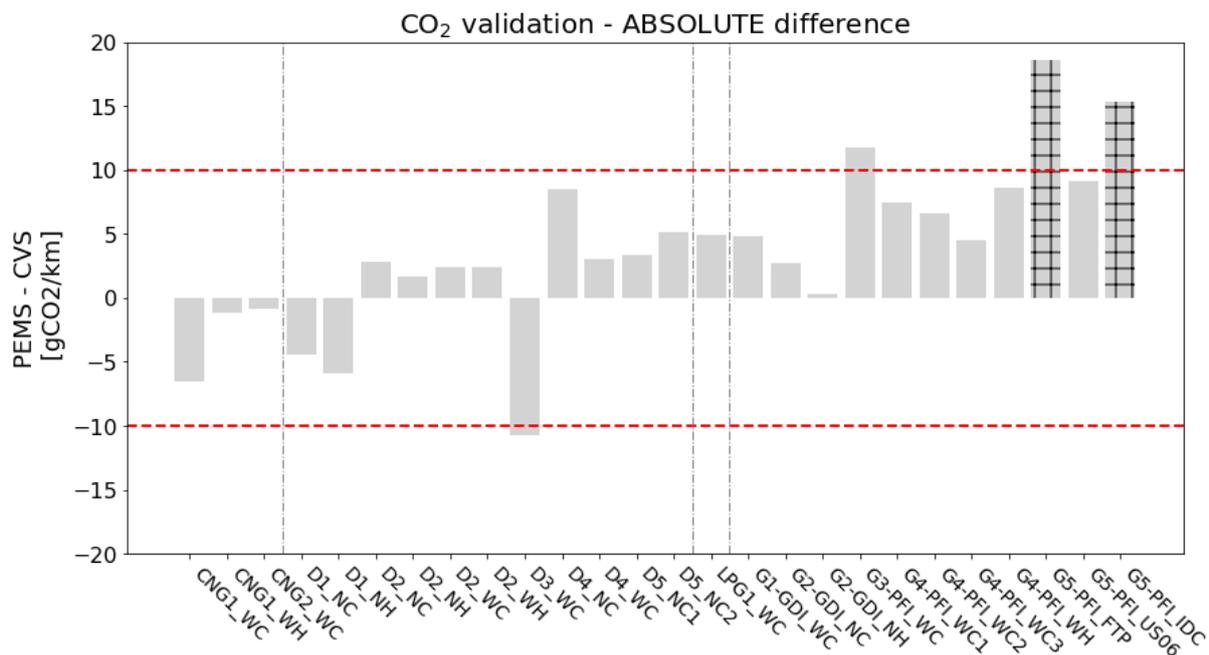

Source: JRC, 2020.

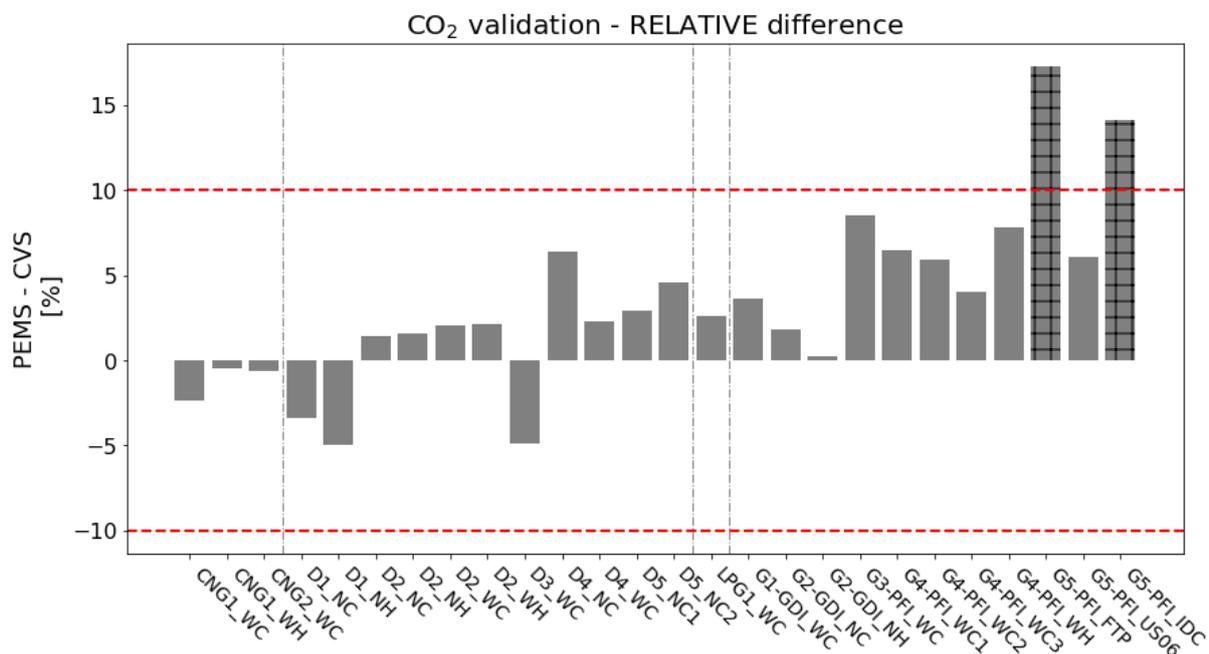

Source: JRC, 2020.

### 4.3 Zero drift of the exhaust mass flowmeter


Prior to the test-start, as defined in RDE regulation (EU 2018/1832) for conventional internal combustion engine vehicles by the first ignition of the thermal engine (engine speed > 50 rpm, and exhaust mass flow > 3 kg/h), the recording of test parameters shall be launched so that all emissions are computed in the test. In the same way, the recording of the test parameters shall continue after the test-end. It is a general procedure at

JRC to launch the recording circa 1 minute before the test-start and finish it circa 1 minute after the test-end to make sure that all information from the test is properly logged and registered. During these two moments, the exhaust mass flowmeter (EFM) is operational and it is logging. As the thermal engine is off, the expected measurement from the EFM is 0 kg/h.

Using the date of the JRC 2018 PEMS campaign, a preliminary assessment of the zero drift of the EFM was performed by comparing the average measurement of the EFM before the test-start, and after the test-end.

The 185 PEMS tests of the campaign, showed the same pattern for what regards exhaust mass flow. As an example, **Figure 80** shows that the EFM measured 0 kg/h when the engine was off before the test and after the test. This could be interpreted as a lack of drift in the EFM measurement of the exhaust mass flow.

**Figure 80.** Exhaust mass flow measurement, engine speed, and vehicle speed, measured immediately before the test-start (left column) and immediately after the test-end (right column) of a representative PEMS test.

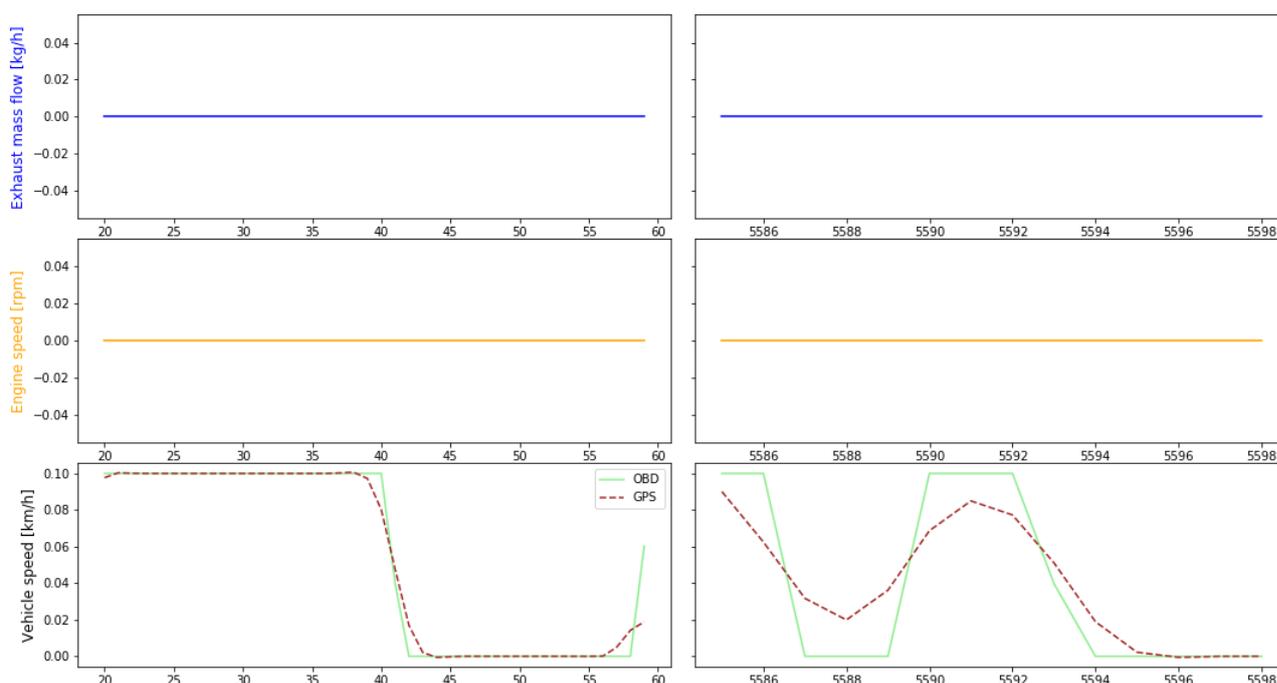

Source: JRC, 2020.

Regarding the validation of the measurement of exhaust mass flow from the EFM of the PEMS against the laboratory equipment, **Table 6** presents the main indicators of the correlation for 20 tests done at JRC in 2018 on a variety of vehicles. All tests were performed using AVL-MOVE units. It is important to notice that the laboratory measurement is not a traceable standard and therefore the analysis on the EFM performance is based on the best surrogate available. For the dataset considered, there is a good correlation between the exhaust mass flow of the PEMS and the measured with the laboratory equipment with an average  $r^2$  of 0.945. Also the intercept and the slope parameters, which provide information on the correlation at low flows and throughout the range of flows, respectively comply well with the permissible tolerances defined in the regulation. It is noticeable that for most tests, the slope is lower than 1, which means that at higher speeds, when the exhaust mass flow is large, the EFM of the PEMS tends to underestimate the flow as compared to the laboratory.

Further data from vehicles with larger engine displacement and other instruments would provide a better understanding of the EFM performance. Based on the data considered it is reasonable to keep the current approach regarding the uncertainty of the EFM in the PEMS margin determination.

**Table 6.** Overview of the performance of the exhaust mass flow measurement with PEMS against laboratory exhaust flow estimation from JRC 2018 PEMS validations.


<b>n = 20</b>	<b>r<sup>2</sup></b>	<b>a<sub>1</sub> slope</b>	<b>a<sub>0</sub> intercept</b>	<b>SEE</b>
Permissible tolerance	≥ 0.90	[0.925/1.075]	[-3.0/3.0]	0.1
Average	0.945	0.929	1.347	0.017
Median	0.968	0.933	1.067	0.018
Outside limit [%]	5	30	10	0

Source: JRC, 2020.

## 5 NOx margin proposal

The calculation framework for the 2018/19 review follows the 2017 concept (**Figure 81**). The PEMS measurement uncertainty is calculated based on the error propagation of its components (analysers, exhaust flow meter (EFM) and GPS). In addition, the effect of the time alignment, dynamics and boundary conditions and the zero drift are considered. These uncertainties are added due to lack of information on their contribution to the PEMS uncertainty.

**Figure 81.** Margin estimation framework.

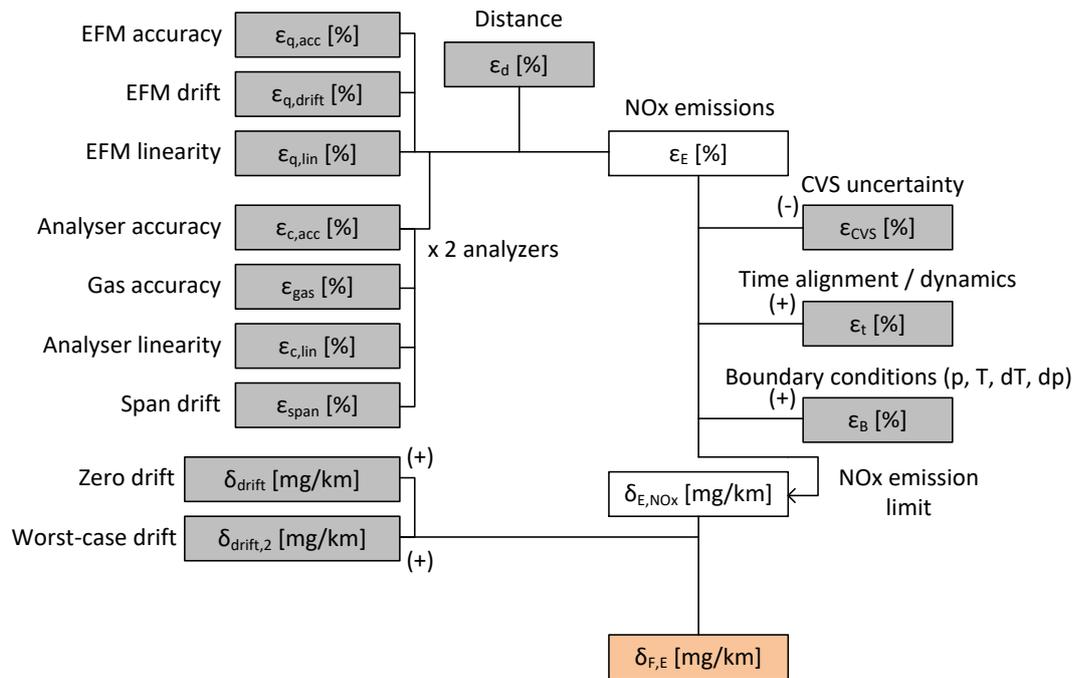

Source: JRC, 2020.

The focus of this review was on parameters that assumptions had to be made in 2017 due to lack of data:

- EFM
- Zero drift
- Effect of boundary conditions

For this chapter the PEMS manufacturers will be referred to as:

- PEMS A: AVL MOVE and the three units A1, A2, A3
- PEMS B: HORIBA OBS-ONE
- PEMS C: AIP
- PEMS D: SENSORS SEMTECH LDV

**Table 7** summarises the dedicated zero drift results of this study (i.e. measuring the zero level every 10-20 min) in the laboratory (chassis dynamometer). The tests (PEMS not measuring exhaust gas) showed small drift under laboratory conditions with maximum  $\pm 2.5$  ppm drift under extreme changes of the temperature

(excluding PEMS D that failed the test). The effect of altitude and vibrations was not assessed in the laboratory.

**Table 7.** Laboratory (chassis dynamometer) assessment of NOx zero drift and influence of temperature. NOx zero drift check every 10-20 min. Influence of altitude or vibrations was not assessed in the laboratory. G=Gradual, S=Step change of temperature.

Laboratory	Baseline	Temperature		
		23 °C to -7 °C	-7 °C	-7 °C to -23 °C
PEMS A1	±0.3 ppm (Figure 42)	G: <2 ppm (Figure 47) S: -2.5 ppm (Figure 56)	-	G: <2 ppm (Figure 53)
PEMS B	±0.3 ppm (Figure 42)	G: +1.0 ppm (Figure 47) S: +1.0 ppm (Figure 61)	Negligible (Figure 50)	G: <2 ppm (Figure 53) S: <2.0 ppm (Figure 66)
PEMS C	-	-	-	-
PEMS D	-	G: -6.0 ppm (Figure 47)	-1 (Figure 50)	G: +3 ppm (Figure 53)

Source: JRC, 2020.


**Table 8** summarises the dedicated zero drift results of this study (i.e. measuring the zero level every 10-20 min) on the road during RDE tests. The RDE test (with vehicle exhaust) covered a range of temperatures between 0 and 36°C and an altitude up to 1100 m. The vibrations were the normal vibrations (and shocks) of RDE tests. The results are summarized in **Figure 82** (RDE compliant routes) and **Figure 83** (high altitude routes).

**Table 8.** On-road assessment of NOx zero drift and influence of temperature, altitude and vibrations. NOx zero drift checks every 10-20 minutes.


On-road (RDE)	Temperature (Figure 82)	Altitude (1100 m) (Figure 83)	Vibrations
PEMS A1-3	10-36°C (Figure 6)	15-34°C (Figure 7)	included
PEMS B	14-23°C (Figure 16)	11-23°C (Figure 17)	included
PEMS C	8-19°C (Figure 26)	3-17°C (Figure 27)	included
PEMS D	0-13°C (Figure 36)	7-16°C (Figure 37)	included

Source: JRC, 2020.

**Figure 82.** On-road NOx zero drift tests (RDE compliant routes).

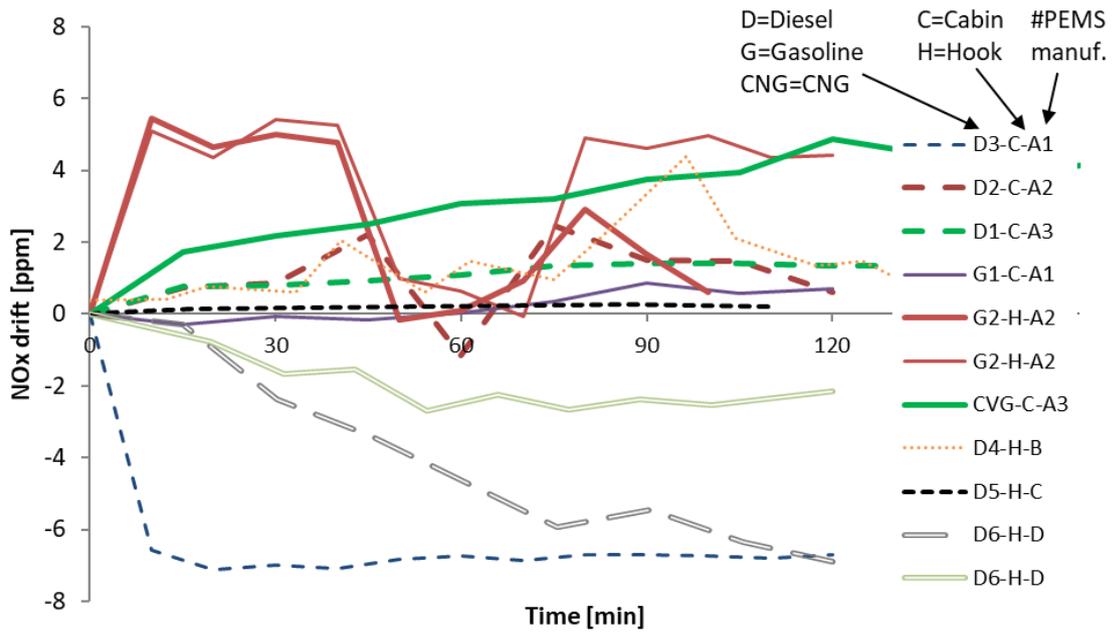

**Figure 83.** On-road NOx zero drift tests (non-RDE compliant routes with high altitude). Top) altitude profile bottom) NOx zero drift

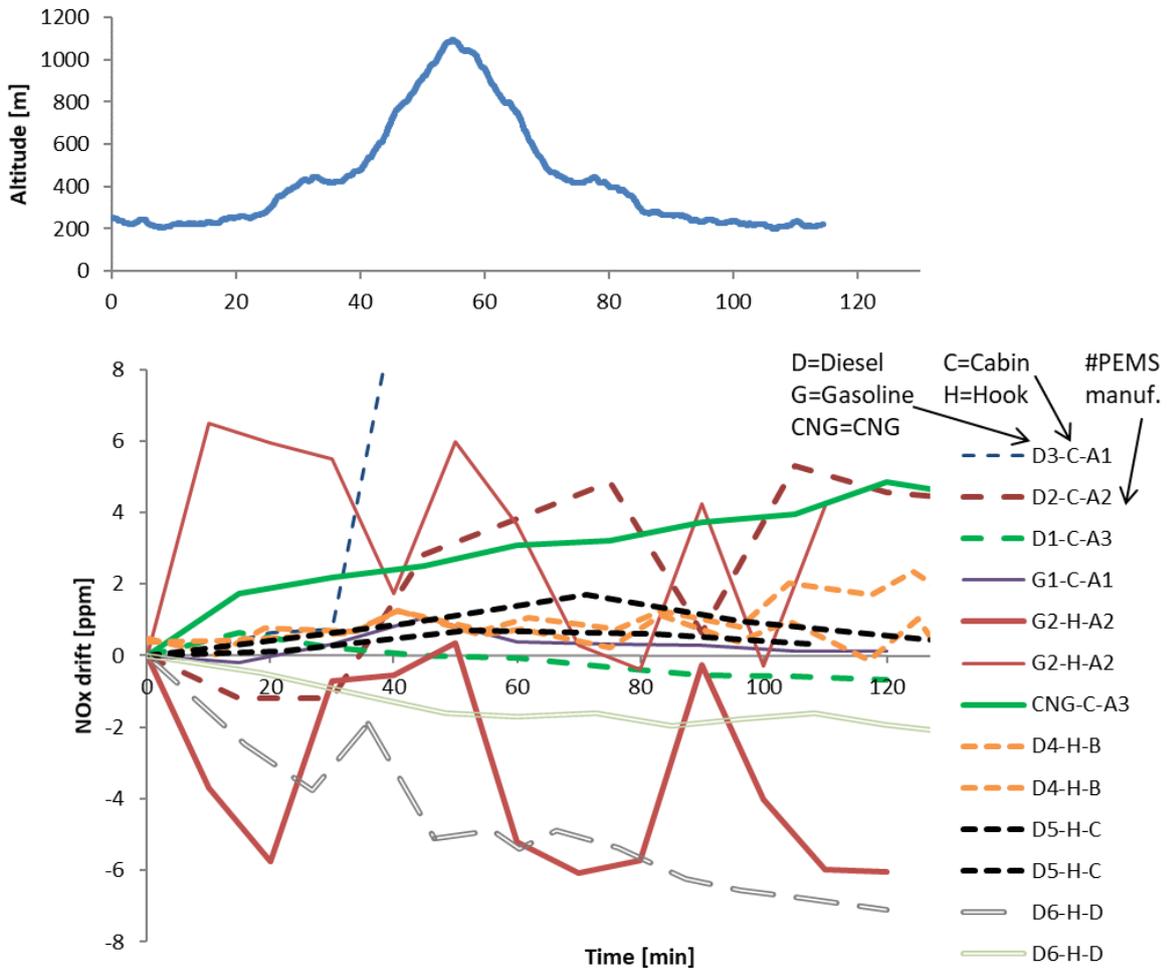

Source: JRC, 2020.

**Table 9** summarises the results of the indirect tests (i.e. only pre- and post test info is available) at the laboratory validations (PEMS measuring exhaust gas). The tests covered a temperature range of 14-25°C, but no altitude or vibrations influence. The zero drift assessment of the EFM was possible in the laboratory though. The results indicate that under laboratory conditions no drift is seen.

The mean slope, an indication of the EFM accuracy, was 0.93 (**Table 6**). However, the comparison was done with estimation of flow from the laboratory, which also has high uncertainty. Comparison of the PEMS CO<sub>2</sub> with the laboratory CO<sub>2</sub> is also an indication of the EFM accuracy (according to the future CEN). This comparison was within 10 g/km of CO<sub>2</sub> for 24 of the 26 validations (**Figure 79**).

**Table 9.** Laboratory (chassis dynamometer) assessment of pre-post validation tests NOx zero drift. The altitude and vibrations influence was not assessed.

Laboratory	14-25°C (RH 45-55%)	Temp.	EFM
PEMS A1-3	96% passed (23 validations) ( <b>Figure 78</b> )	100% passed (1 validation)	No drift
PEMS B	100% passed (1 validation)	-	
PEMS C	100% passed (2 validations)	100% passed (2 validations)	No drift
PEMS D	-	-	

Source: JRC, 2020.

**Table 10** summarises the results of the on-road indirect tests (i.e. only pre- and post test info is available). The RDE tests covered a temperature range of 3-33°C and an altitude of up to 1100 m. For the on-road tests the typical vibrations and shocks were also included. Drift higher than 5 ppm happened in <10% of the tests.

**Table 10.** On-road assessment of pre-post RDE NOx zero drift and influence of temperature, altitude and vibrations. Results based on 185 tests (PEMS A), 2 tests (PEMS C). 19 tests at high altitude (PEMS A).

On-road	Baseline	Temperature / Humidity	Altitude (1100 m)	Vibrations / hook-cabin	EFM
PEMS A1-3	90% <5 ppm ( <b>Figure 71</b> )	3-33°C ( <b>Figure 74a</b> ) 16-95% ( <b>Figure 74b</b> )	84% <5 ppm ( <b>Figure 77</b> )	included	No drift ( <b>Figure 80</b> )
PEMS B	-	-	-	-	
PEMS C	No drift	-	-	-	No drift
PEMS D	-	-	-	-	

Source: JRC, 2020.

Based on these experimental results the input for the assessment of the PEMS measurement uncertainty is summarized in **Table 11**.

- EFM: The EFM uncertainty was kept 10%. The EFM drift was negligible, but it was kept 2% (max. allowed in the regulation).

- Boundary conditions: As the influence of the boundary conditions was not clear and in most cases any effect was absorbed during the zero drift checks, it was decided to set it zero and include it in the zero drift.
- Zero drift: The zero drift was assessed using the zero drift curves of **Figure 82** and the respective exhaust flow rates of the vehicles used. An example is given in **Figure 84**. The maximum effect was 10 mg/km. In order to estimate a worst case scenario, the worst case experimentally determined drift (G2-H-A2) was combined with the maximum exhaust flow rate assessed (the CNG van). The result was 16 mg/km at the urban part. Thus, in order to cover large engines and/or urban conditions a 6 mg/km worst case drift was considered. It should be mentioned that there could be cases that the effect of the zero drift will be higher than this experimental worst case drift (i.e. step drift of large engines). These cases should be <<1%.


**Table 11.** Sources (components) of PEMS measurement uncertainty, as specified by the measurement performance criteria laid out in RDE regulation and as estimated from the experimental uncertainties from the 2018-9 review.

Name	Symbol	RDE	2017 review	Comments
<b>EXHAUST FLOW METER (EFM)</b>				
EFM accuracy	$\epsilon_{q,acc}$	3%	10%	<b>Table 6</b>
EFM drift	$\epsilon_{q,drift}$	2%	negligible	<b>Table 10</b>
EFM linearity	$\epsilon_{q,lin}$	2%	1.8%	<b>Table 6</b>
<b>GAS ANALYSERS</b>				
Analyser accuracy	$\epsilon_{c,acc}$	2%	not examined	
Analyser linearity	$\epsilon_{c,lin}$	1%	not examined	
Span drift	$\epsilon_{span}$	2%	not examined	
Gas accuracy	$\epsilon_{gas}$	2%	not examined	
<b>OTHER</b>				
Distance	$\epsilon_d$	4%	not examined	
Dynamics	$\epsilon_t$	time aligned	not examined	
Boundary conditions	$\epsilon_B$	0%	included in zero	<b>Table 8</b>
<b>ZERO DRIFT</b>				
Analyser zero drift	$\delta_{drift}$	5 ppm	10 mg/km	<b>Figure 84</b>
Worst-case drift	$\delta_{drift,2}$	-	6 mg/km	<b>Figure 84</b>

Source: JRC, 2020.


The final calculations for the NOx margin are shown in **Figure 85**. The result is 32% at an emissions level of 80 mg/km.

**Figure 84.** Examples of inputs for calculation of NOx zero drift. Left: G2-C-A2 NOx zero drift urban 6.3 mg/km and total RDE 4.0 mg/km. Right: CNG-C-A3 NOx zero drift urban 5.9 mg/km and total RDE 9.2 mg/km. Combining the experimental worst case drift with the high exhaust flow rate NOx zero drift urban 15.9 mg/km and total RDE 11.3 mg/km are calculated.

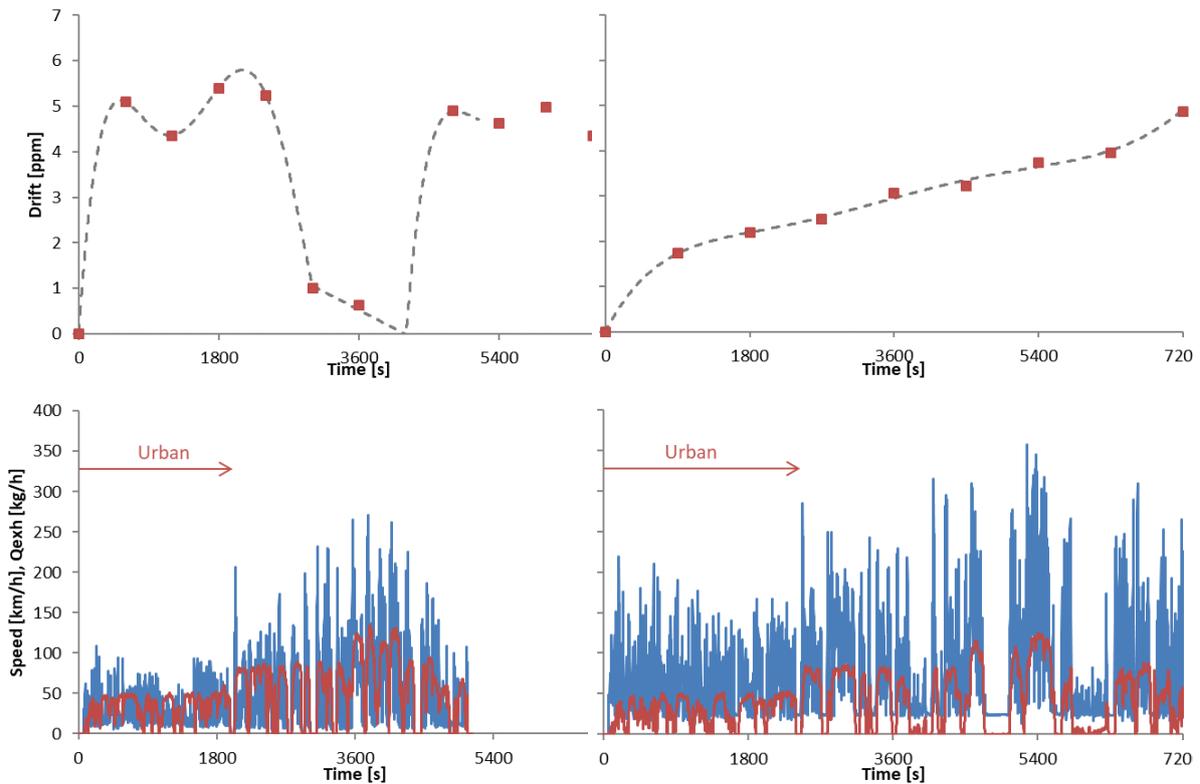

Source: JRC, 2020.

**Figure 85.** Calculation of the NOx margin based on the results of this study.

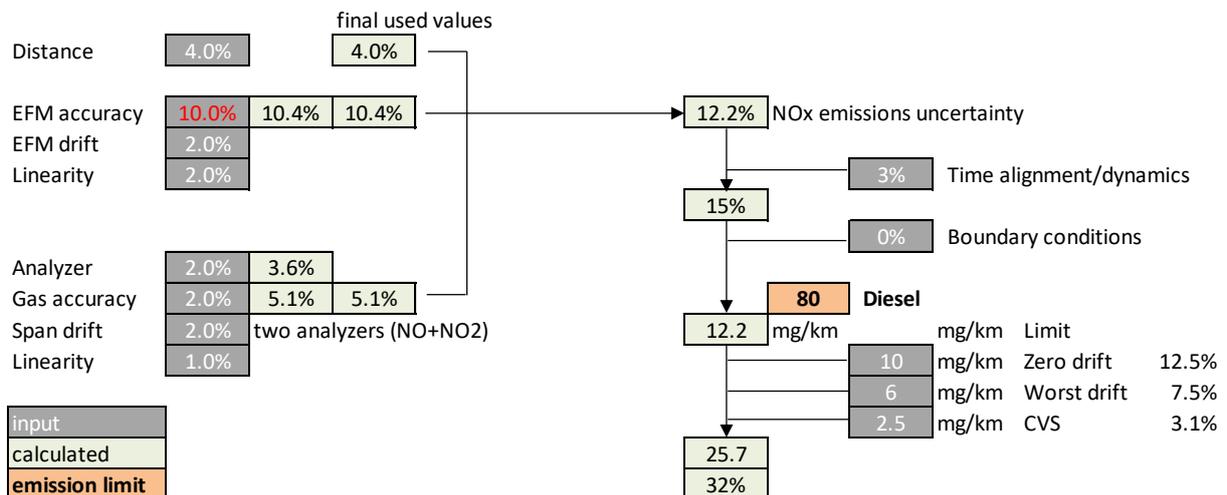

Source: JRC, 2020.

## 6 Conclusions

The PEMS measurement uncertainty framework of 2017 identified three areas that needed better feedback: EFM uncertainty, zero drift and effect of boundary conditions on PEMS.

In this measurement campaign these areas were addressed with special emphasis on the zero drift.

Dedicated on-road tests were conducted measuring the zero drift of the analysers every 10-20 min during RDE compliant and non-compliant routes. Altitudes up to 1100 m were covered and temperatures within 0 °C and 35 °C. Lower temperatures (-7 °C) and drastic changes of the temperature (-7 °C to 23 °C and vice versa) were better assessed in the laboratory.

The results of the test campaign did not show a uniform behaviour of the zero drift among tests, instruments, and pollutants. There is no systematic positive or negative drift, neither a systematic step nor linear drift.

In a given route with a specific PEMS unit, the drift for one gas analyser is independent from the drift of another gas analyser.

For the range of tested temperatures (0 °C – 35 °C) tests done under similar temperature and humidity conditions resulted in no drift or significant drift, pointing to the fact that there does not seem to exist a relationship between the measured zero drift at a given step of the trip and the ambient temperature and humidity conditions. Also, the results of zero drift in the high altitude route are similar to those observed on the RDE compliant routes.

The drastic thermal changes affected one of the PEMS manufacturers only, although in conditions not foreseen by the PEMS manufacturer.

Not negligible zero drift is observed in tests done in vehicles with spark ignition as well as with compression ignition pointing to the fact that there is not particular influence of the vehicle technology on the drift.

Tests where the PEMS was mounted on the trailer hook had a similar behaviour in terms of drift as tests where the PEMS is mounted inside the vehicle.

NO<sub>x</sub> zero drift hypothesis of a step drift occurring at the very beginning of the test and then being maintained along the duration of the test is not verified in any of the tests performed. The observations of the campaign can justify further reducing the margin for NO<sub>x</sub> on RDE tests.

Based on the worst case scenario for zero drift of the JRC testing campaign and considering the effect on a vehicle with large engine displacement (largest effect in terms of NO<sub>x</sub> mass), the updated NO<sub>x</sub> margin that is proposed is 0.32.

## References

Commission Regulation (EU) 2016/427 of 10 March 2016 amending Regulation (EC) No 692/2008 as regards emissions from light passenger and commercial vehicles (Euro 6) (RDE1). Official Journal of the European Union L 82/1.

Commission Regulation (EU) 2016/646 of 20 April 2016 amending Regulation (EC) No 692/2008 as regards emissions from light passenger and commercial vehicles (Euro 6) (RDE2). Official Journal of the European Union L 109/1.

Commission Regulation (EU) 2017/1151 of 1 June 2017 supplementing Regulation (EC) No 715/2007 of the European Parliament and of the Council on type-approval of motor vehicles with respect to emissions from light passenger and commercial vehicles (Euro 5 and Euro 6) and on access to vehicle repair and maintenance information, amending Directive 2007/46/EC of the European Parliament and of the Council, Commission Regulation (EC) No 692/2008 and Commission Regulation (EU) No 1230/2012 and repealing Commission Regulation (EC) No 692/2008. Official Journal of the European Union L 175/1.

Commission Regulation (EU) 2017/1154 of 7 June 2017 amending Regulation (EU) 2017/1151 supplementing Regulation (EC) No 715/2007 of the European Parliament and of the Council on type-approval of motor vehicles with respect to emissions from light passenger and commercial vehicles (Euro 5 and Euro 6) and on access to vehicle repair and maintenance information, amending Directive 2007/46/EC of the European Parliament and of the Council, Commission Regulation (EC) No 692/2008 and Commission Regulation (EU) No 1230/2012 and repealing Regulation (EC) No 692/2008 and Directive 2007/46/EC of the European Parliament and of the Council as regards real-driving emissions from light passenger and commercial vehicles (Euro 6) (RDE3). Official Journal of the European Union L 175/708.

Commission Regulation (EU) 2018/1832 of 5 November 2018 amending Directive 2007/46/EC of the European Parliament and of the Council, Commission Regulation (EC) No 692/2008 and Commission Regulation (EU) 2017/1151 for the purpose of improving the emission type approval tests and procedures for light passenger and commercial vehicles, including those for in-service conformity and real-driving emissions and introducing devices for monitoring the consumption of fuel and electric energy (RDE4). Official Journal of the European Union L 301/1.

Giechaskiel, B., Clairotte, M., Valverde, V. and Bonnel, P., *Real driving emissions: 2017 assessment of Portable Emissions Measurement Systems (PEMS) measurement uncertainty.*, JRC report EUR 29138, Publications Office of the European Union, Luxembourg, 2018, doi:10.2760/127122.

O'Driscoll, R., Stettler, M., Molden, N., Oxley, T. and ApSimon, H., *Real world CO<sub>2</sub> and NO<sub>x</sub> emissions from 149 Euro 5 and 6 diesel, gasoline and hybrid passenger cars*, Science of The Total Environment, Vol 621, 282-290, 2018, doi:10.1016/j.scitotenv.2017.11.271

Suarez-Bertoa, R., Valverde, V., Clairotte, M., Pavlovic, J., Giechaskiel, B., Franco, V., Kregar, Z., Astorga, C., *On-road emissions of passenger cars beyond the boundary conditions of the real-driving emissions test*, Environmental Research, Vol 176, 108572, 2019, doi: 10.1016/j.envres.2019.108572

Valverde, V., Bonnel, P. *On-road testing with Portable Emissions Measurement Systems (PEMS). Guidance note for light-duty vehicles.*, JRC report EUR 29029, Publications Office of the European Union, Luxembourg, 2018, doi:10.2760/08294.

Valverde, V., Clairotte, M., Bonnel, P., Giechaskiel, B., Carriero, M., Otura, M., Gruening, C., Fontaras, G., Pavlovic, J., Martini, G., Suarez-Bertoa, R., Krasenbrink, A. *Joint Research Center 2018 light-duty vehicles emissions testing - Contribution to the EU market surveillance: testing protocols and vehicle emissions performance.*, JRC report EUR 29897, Publications Office of the European Union, Luxembourg, 2019, doi:10.2760/155802.

## **List of abbreviations and definitions**

CF	Conformity Factor
EFM	Exhaust flow meter
EU	European Union
GDI	Gasoline direct injection
JRC	Joint Research Center
NOx	Nitrogen oxides
PEMS	Portable Emissions Measurement Systems
PFI	Port-fuel injection
PN	Particle Number
RDE	Real Driving Emissions
VELA	Vehicle Emissions Laboratory
WLTP	Worldwide harmonised Light-duty vehicles Test Procedures

## List of figures

<b>Figure 1.</b> Overview of PEMS installations on the trailer hook for the three PEMS instruments assessed: a) AVL-MOVE, b) HORIBA OBS-ONE, c) AIP-PEMS, d) SENSORS SEMTECH LDV and e) fixation of N <sub>2</sub> bottle on-board the vehicle.....	5
<b>Figure 2.</b> NO zero drift over RDE compliant routes .....	11
<b>Figure 3.</b> NO zero drift over the high altitude route .....	12
<b>Figure 4.</b> NO <sub>2</sub> zero drift over RDE compliant routes .....	13
<b>Figure 5.</b> NO <sub>2</sub> zero drift over the high altitude route .....	13
<b>Figure 6.</b> NO <sub>x</sub> zero drift over RDE compliant routes .....	14
<b>Figure 7.</b> NO <sub>x</sub> zero drift over the high altitude route .....	14
<b>Figure 8.</b> CO <sub>2</sub> zero drift over RDE compliant routes.....	15
<b>Figure 9.</b> CO <sub>2</sub> zero drift over the high altitude route.....	15
<b>Figure 10.</b> CO zero drift over RDE compliant routes .....	16
<b>Figure 11.</b> CO zero drift over the high altitude routes.....	16
<b>Figure 12.</b> NO zero drift over RDE compliant routes.....	17
<b>Figure 13.</b> NO zero drift over the high altitude route.....	17
<b>Figure 14.</b> NO <sub>2</sub> zero drift over RDE compliant routes.....	18
<b>Figure 15.</b> NO <sub>2</sub> zero drift over the high altitude route.....	18
<b>Figure 16.</b> NO <sub>x</sub> zero drift over RDE compliant routes.....	19
<b>Figure 17.</b> NO <sub>x</sub> zero drift over the high altitude route.....	19
<b>Figure 18.</b> CO <sub>2</sub> zero drift over RDE compliant routes .....	20
<b>Figure 19.</b> CO <sub>2</sub> zero drift over the high altitude route .....	20
<b>Figure 20.</b> CO zero drift over RDE compliant routes .....	21
<b>Figure 21.</b> CO zero drift over the high altitude routes.....	21
<b>Figure 22.</b> NO zero drift over RDE compliant routes.....	22
<b>Figure 23.</b> NO zero drift over the high altitude routes .....	22
<b>Figure 24.</b> NO <sub>2</sub> zero drift over RDE compliant routes.....	23
<b>Figure 25.</b> NO <sub>2</sub> zero drift over the high altitude routes.....	23
<b>Figure 26.</b> NO <sub>x</sub> zero drift over RDE compliant routes.....	24
<b>Figure 27.</b> NO <sub>x</sub> zero drift over the high altitude routes .....	24
<b>Figure 28.</b> CO <sub>2</sub> zero drift over RDE compliant routes .....	25
<b>Figure 29.</b> CO <sub>2</sub> zero drift over the high altitude routes.....	25
<b>Figure 30.</b> CO zero drift over RDE compliant routes .....	26
<b>Figure 31.</b> CO zero drift over the high altitude routes.....	26
<b>Figure 32.</b> NO zero drift over RDE compliant routes.....	27
<b>Figure 33.</b> NO zero drift over the high altitude route.....	27
<b>Figure 34.</b> NO <sub>2</sub> zero drift over RDE compliant routes.....	28

<b>Figure 35.</b> NO <sub>2</sub> zero drift over the high altitude route .....	28
<b>Figure 36.</b> NO <sub>x</sub> zero drift over RDE compliant routes .....	29
<b>Figure 37.</b> NO <sub>x</sub> zero drift over the high altitude route .....	29
<b>Figure 38.</b> CO <sub>2</sub> zero drift over RDE compliant routes .....	30
<b>Figure 39.</b> CO <sub>2</sub> zero drift over the high altitude route .....	30
<b>Figure 40.</b> NO zero drift checks for static tests .....	31
<b>Figure 41.</b> NO <sub>2</sub> zero drift checks for static tests .....	31
<b>Figure 42.</b> NO <sub>x</sub> zero drift checks for static tests .....	32
<b>Figure 43.</b> CO <sub>2</sub> zero drift checks for static tests .....	32
<b>Figure 44.</b> CO zero drift checks for static tests .....	33
<b>Figure 45.</b> NO zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from 23 °C to -7 °C .....	34
<b>Figure 46.</b> NO <sub>2</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from 23 °C to -7 °C .....	34
<b>Figure 47.</b> NO <sub>x</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from 23 °C to -7 °C .....	35
<b>Figure 48.</b> NO zero drift checks for static tests in a climatic chamber where ambient temperature was kept constant at -7 °C .....	35
<b>Figure 49.</b> NO <sub>2</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was kept constant at -7 °C .....	36
<b>Figure 50.</b> NO <sub>x</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was kept constant at -7 °C .....	36
<b>Figure 51.</b> NO zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from -7 °C to 23 °C .....	37
<b>Figure 52.</b> NO <sub>2</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from -7 °C to 23 °C .....	37
<b>Figure 53.</b> NO <sub>x</sub> zero drift checks for static tests in a climatic chamber where ambient temperature was gradually changed from -7 °C to 23 °C .....	38
<b>Figure 54.</b> NO zero drift checks for static tests with drastic change of temperature – AVL-MOVE .....	39
<b>Figure 55.</b> NO <sub>2</sub> zero drift checks for static tests with drastic change of temperature – AVL-MOVE .....	39
<b>Figure 56.</b> NO <sub>x</sub> zero drift checks for static tests with drastic change of temperature – AVL-MOVE .....	40
<b>Figure 57.</b> CO <sub>2</sub> zero drift checks for static tests with drastic change of temperature – AVL-MOVE .....	40
<b>Figure 58.</b> CO zero drift checks for static tests with drastic change of temperature – AVL-MOVE .....	41
<b>Figure 59.</b> NO zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE ...	42
<b>Figure 60.</b> NO <sub>2</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE ...	42
<b>Figure 61.</b> NO <sub>x</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE ...	43
<b>Figure 62.</b> CO <sub>2</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE ...	43
<b>Figure 63.</b> CO zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE ...	44
<b>Figure 64.</b> NO zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE ...	44

<b>Figure 65.</b> NO <sub>2</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE ...	45
<b>Figure 66.</b> NO <sub>x</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE...	45
<b>Figure 67.</b> CO <sub>2</sub> zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE ...	46
<b>Figure 68.</b> CO zero drift checks for static tests with drastic change of temperature – HORIBA OBS-ONE ....	46
<b>Figure 69.</b> NO zero drift of PEMS tests performed by JRC on 2018 as function of PEMS instrument.....	48
<b>Figure 70.</b> NO <sub>2</sub> zero drift of PEMS tests performed by JRC on 2018 as function of PEMS instrument.....	48
<b>Figure 71.</b> NO <sub>x</sub> zero drift of PEMS tests performed by JRC on 2018 as function of PEMS instrument top) NO <sub>x</sub> zero calculated as sum of absolute NO and NO <sub>2</sub> zero drifts. bottom) NO <sub>x</sub> zero calculated as sum of NO and NO <sub>2</sub> zero drifts. ....	49
<b>Figure 72.</b> NO zero drift of PEMS tests performed by JRC on 2018 as function of PEMS installation location and top) ambient temperature, bottom) ambient humidity .....	50
<b>Figure 73.</b> NO <sub>2</sub> zero drift of PEMS tests performed by JRC on 2018 as function of PEMS installation location and top) ambient temperature, bottom) ambient humidity .....	51
<b>Figure 74.</b> NO <sub>x</sub> zero drift of PEMS tests performed by JRC on 2018 as function of PEMS installation location and top) ambient temperature, bottom) ambient humidity .....	52
<b>Figure 75.</b> NO zero drift of PEMS tests performed by JRC on 2018 as function of altitude .....	53
<b>Figure 76.</b> NO <sub>2</sub> zero drift of PEMS tests performed by JRC on 2018 as function of altitude.....	53
<b>Figure 77.</b> NO <sub>x</sub> zero drift of PEMS tests performed by JRC on 2018 as function of altitude top) NO <sub>x</sub> zero calculated as sum of absolute NO and NO <sub>2</sub> zero drifts. bottom) NO <sub>x</sub> zero calculated as sum of NO and NO <sub>2</sub> zero drifts.....	54
<b>Figure 78.</b> Validation of NO <sub>x</sub> measurement with PEMS against laboratory grade equipment from 2018 JRC PEMS activity top) absolute difference, bottom) relative difference. The red dotted lines indicate the permissible tolerances for NO <sub>x</sub> on PEMS validation tests. The hatches indicate the failed PEMS validation. ..	56
<b>Figure 79.</b> Validation of CO <sub>2</sub> measurement with PEMS against laboratory grade equipment from 2018 JRC PEMS activity top) absolute difference, bottom) relative difference. The red dotted lines indicate the permissible tolerances for CO <sub>2</sub> on PEMS validation tests. The hatches indicate the failed PEMS validation....	57
<b>Figure 80.</b> Exhaust mass flow measurement, engine speed, and vehicle speed, measured immediately before the test-start (left column) and immediately after the test-end (right column) of a representative PEMS test. ....	58
<b>Figure 81.</b> Margin estimation framework. ....	60
<b>Figure 82.</b> On-road NO <sub>x</sub> zero drift tests (RDE compliant routes).....	62
<b>Figure 83.</b> On-road NO <sub>x</sub> zero drift tests (non-RDE compliant routes with high altitude). Top) altitude profile bottom) NO <sub>x</sub> zero drift .....	62
<b>Figure 84.</b> Examples of inputs for calculation of NO <sub>x</sub> zero drift. Left: G2-C-A2 NO <sub>x</sub> zero drift urban 6.3 mg/km and total RDE 4.0 mg/km. Right: CNG-C-A3 NO <sub>x</sub> zero drift urban 5.9 mg/km and total RDE 9.2 mg/km. Combining the experimental worst case drift with the high exhaust flow rate NO <sub>x</sub> zero drift urban 15.9 mg/km and total RDE 11.3 mg/km are calculated. ....	65
<b>Figure 85.</b> Calculation of the NO <sub>x</sub> margin based on the results of this study. ....	65

## List of tables

<b>Table 1.</b> Measurement principles of the gas PEMS instruments used in the zero drift campaign .....	4
<b>Table 2.</b> Overview of testing conditions including PEMS installation location (PEMS loc.), ambient temperature (T) and relative humidity (RH) range and average (av.) conditions. The characteristics of the vehicles are fully described in Valverde et al., (2019) using the same vehicle codes except for tests 19-30. ....	6
<b>Table 3.</b> Overview of JRC 2018 PEMS test for Market Surveillance pilot project. The characteristics of the vehicles are fully described in Valverde et al., (2019) using the same vehicle codes. ....	10
<b>Table 4.</b> NO, NO <sub>2</sub> and NO <sub>x</sub> zero drift from the JRC 2018 PEMS test campaign (n = 185). ....	47
<b>Table 5.</b> Results of PEMS validation test performed at -7 °C .....	55
<b>Table 6.</b> Overview of the performance of the exhaust mass flow measurement with PEMS against laboratory exhaust flow estimation from JRC 2018 PEMS validations. ....	59
<b>Table 7.</b> Laboratory (chassis dynamometer) assessment of NO <sub>x</sub> zero drift and influence of temperature. NO <sub>x</sub> zero drift check every 10-20 min. Influence of altitude or vibrations was not assessed in the laboratory. G=Gradual, S=Step change of temperature. ....	61
<b>Table 8.</b> On-road assessment of NO <sub>x</sub> zero drift and influence of temperature, altitude and vibrations. NO <sub>x</sub> zero drift checks every 10-20 minutes. ....	61
<b>Table 9.</b> Laboratory (chassis dynamometer) assessment of pre-post validation tests NO <sub>x</sub> zero drift. The altitude and vibrations influence was not assessed. ....	63
<b>Table 10.</b> On-road assessment of pre-post RDE NO <sub>x</sub> zero drift and influence of temperature, altitude and vibrations. Results based on 185 tests (PEMS A), 2 tests (PEMS C). 19 tests at high altitude (PEMS A). ....	63
<b>Table 11.</b> Sources (components) of PEMS measurement uncertainty, as specified by the measurement performance criteria laid out in RDE regulation and as estimated from the experimental uncertainties from the 2018-9 review. ....	64

## **GETTING IN TOUCH WITH THE EU**

### **In person**

All over the European Union there are hundreds of Europe Direct information centres. You can find the address of the centre nearest you at: [https://europa.eu/european-union/contact\\_en](https://europa.eu/european-union/contact_en)

### **On the phone or by email**

Europe Direct is a service that answers your questions about the European Union. You can contact this service:

- by freephone: 00 800 6 7 8 9 10 11 (certain operators may charge for these calls),
- at the following standard number: +32 22999696, or
- by electronic mail via: [https://europa.eu/european-union/contact\\_en](https://europa.eu/european-union/contact_en)

## **FINDING INFORMATION ABOUT THE EU**

### **Online**

Information about the European Union in all the official languages of the EU is available on the Europa website at: [https://europa.eu/european-union/index\\_en](https://europa.eu/european-union/index_en)

### **EU publications**

You can download or order free and priced EU publications from EU Bookshop at: <https://publications.europa.eu/en/publications>. Multiple copies of free publications may be obtained by contacting Europe Direct or your local information centre (see [https://europa.eu/european-union/contact\\_en](https://europa.eu/european-union/contact_en)).

## The European Commission's science and knowledge service

Joint Research Centre

### JRC Mission

As the science and knowledge service of the European Commission, the Joint Research Centre's mission is to support EU policies with independent evidence throughout the whole policy cycle.



**EU Science Hub**  
ec.europa.eu/jrc



@EU\_ScienceHub



EU Science Hub - Joint Research Centre



EU Science, Research and Innovation



EU Science Hub



Publications Office  
of the European Union

doi:10.2760/06282

ISBN 978-92-76-16365-7